

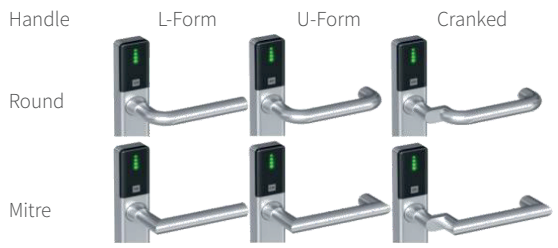


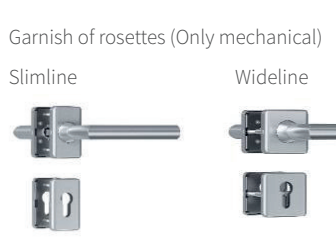

DOM Guard: Order list for all variants

Euro profile

Typ	RFID		Mechanical	
	Slimline	Wideline	Compact Slimline	Compact Wideline
	Slimline	Wideline	Rosettes Slimline	Rosettes Wideline
	Quantity			
	System choice	ENiQ 13,56 MHz		
		ELS 125 kHz		
		DOM Tapkey 13,56 MHz		
	Version	Set (Inner & Outer)		
Only Outer Fitting				
Only Inner Fitting				
2-sided-readability without cylinder rosettes				
Cylinder hole	Without (blind)			
	Euro profile	55 mm		
		70 mm		
		72 mm		
		78 mm		
		85 mm		
		88 mm		
90 mm				
92 mm				
Colour	Black			
	White			
	Grey			
Handle	Mitre	U-Form		
		L-Form		
		Cranked		
	Round	U-Form		
		L-Form		
		Cranked		
Door leaf thickness	36-46 mm			
	46-56 mm			
	56-66 mm			
	66-76 mm			
	76-86 mm			
	86-96 mm			
	96-106 mm			
106-116 mm				
Spindle size	7 mm			
	8 mm			
	8,5 mm			
	9 mm			
	10 mm			

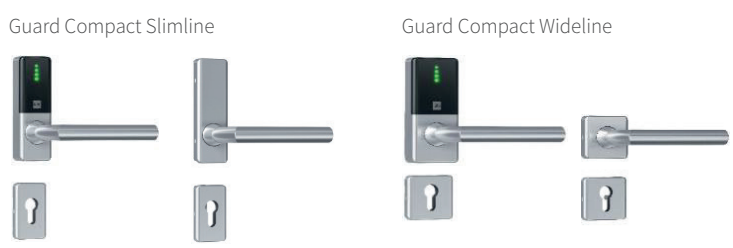

Client name

Customer number

Commission number

Offer/object number

Date/Signature/Company stamp

