



TITAN

INNOVATION | TECHNOLOGY | PROTECTION



KATALOG | IZBOR IZ ASORTIMANA
CATALOGUE | IZBOR ARTIKLOV
2015 | SELECTED ITEMS



NAPOMENA:

Uz izbor iz TITANOVOG asortimana katalogu su pridruženi i dijelovi asortimana sestrinskih tvrtki: **CR Serrature, DOM Technologies, Euro-Elzett, Metaplast** i **RONIS**.

OPOMBA:

Izbranim TITAN-ovim artiklom so v katalogu pridruženi tudi izbrani artikli sestrskih podjetij: **CR Serrature, DOM Technologies, Euro-Elzett, Metaplast** in **RONIS**.

NOTICE:

With selected items from TITAN range in this catalogue, a part of presented assortment is produced by our syster companies: **CR Serrature, DOM Technologies, Euro-Elzett, Metaplast** and **RONIS**.



Sadržaj | [Kazalo](#) | Table of Contents

1 PREDSTAVLJANJE PODUZEĆA PREDSTAVITEV PODJETJA COMPANY PRESENTATION	5
2 PROFILNI CILINDRI PROFILNI CILINDRI PROFILE CYLINDERS	7
T200	8
K66	10
K55	12
ix Saturn	14
ix 6 SR	16
ix DAS	18
Pregled cilindara Pregled cilindrov Cylinders Overview (diamant, ix Saturn, T250, ix 6 SR, T200, ix DAS, T100RX, K66, K56, K55, K5, i6, K1, K, XT, K5 PLUS)	20
Kako odabrati profilni cilindar i značajke Kako izbrati profilni cilindar in lastnosti How to Choose Profile Cylinder	29
Dimenzije cilindara Dimenzije cilindrov Cylinder Dimensions	34
Završne obrade Površinska obdelava Finishes	37
Kako odrediti dužinu i izvedbu cilindra Kako izbrati dolžino in izvedbo cilindra How to Choose and Measure Cylinder	38
Legenda ikona Pomen ikon Icon Legend	40
3 ELEKTRONSKI SIGURNOSNI SUSTAVI ELEKTRONSKI VARNOSTNI SISTEMI ELECTRONIC SECURITY SYSTEMS	43
DOM ENIQ® Mifare	44
DOM Guardian® Mifare	45
DOM Mifare transponderi DOM Mifare transponderji DOM Mifare Transponders	46
4 LOKOTI OBEŠANKE PADLOCKS	47
842/25	48
842/35	48
842/45	48
842/50	50
842/848	50
777-02-M	52
777 P391	52
Savjeti za izbor lokota Nasveti za izbiro obešanke How to Choose Padlock	54

5 BRAVICE ZA NAMJEŠTAJ I ORMARIĆE**KLJUČAVNICE ZA POHIŠTVO****FURNITURE LOCKS AND CAM LOCKS**

FURNITURE LOCKS AND CAM LOCKS	55
852/30	56
845/35	56
853/A (853 01*), 853/B (853 02*), 853/C (853 03*)	57
4500-01	58
18600-01	58
31150-01	59
PKR 101, PKR 102, PKR 103	60
KO-12	61
KO-10	61
KO-10X	62
KO-11	62
KO-13	63
EI-13	63
4900-03	64
16100-01	64
16400-04	65
2800-01	65
25300-03	66
26200-01	66
22500-01	67
382	67
18800-03/1	68
4600-01	68
23500-01	69
SKK1	69
Zasuni Zapahi Cams	70

6 BRAVE ZA DRVENA VRATA**VDOLBNE KLJUČAVNICE****MORTISE LOCKS**

MORTISE LOCKS	73
801/40-90 (801/6,5*)	74
801/50-90 (801/8*)	75
802/40-90 (802/6,5*)	76
401/55-72	77
402/55-72	78
KOLIBER-M BB 72/55 SP	79
Ključevi Ključići Keys	80
529/40 (529/6,5*)	81

811/40-90 bez podizača brez vzvoda without lever (809/6,5*)	82
811/40-90 s podizačem z vzvodom with lever (811/6,5*)	83
811/50-90 bez podizača brez vzvoda without lever (805/8*)	84
811/50-90 s podizačem z vzvodom with lever (807/8*)	85
709/50-90	86
KOLIBER-M PZ 72/55 SP	87
811/40 (809/V 6,5*)	88
811/50 (805/V*)	89
411/55-72	90
421/65-92 (421 PZ-65W*)	91
D31	92
777/50 (777/8*)	93
777/45 (777/7*)	94
806/40-90 (600/WC*)	95
806/50-90 (600/8*)	96
406/55-72	97
KOLIBER-M BAD 72/55 SP	98
Kako odabrati bravu? Kako izbrati ključavnico? How to Choose Lock?	99
Vrste vrata Vrste vrat Door Types	100
Strana brave (lijeva / desna) Stran ključavnice (leva / desna) Door Lock Side (left / right)	100

7 BRAVE ZA METALNA I PVC VRATA

KLJUČAVNICE ZA KOVINSKA IN PVC VRATA

LOCKS FOR METAL AND PVC DOORS	101
821/17 (821/25*)	102
821/25 (821/40*)	103
822/17-68 (822/25*)	104
822/25-60 (822/40*)	105
830/20, 25, 30, 35, 40	106
831/20, 25, 30, 35, 40	107
820/50 (820*)	108
EUROPORTAL-EP-SL (823*)	109
EUROPORTAL-EP	110
VEKTOR-VE	111
VEKTOR-SL	112

8 SIGURNOSNE BRAVE

VARNOSTNE KLJUČAVNICE

SECURITY LOCKS	113
784	114
784 V	115

VDC	116
555 P	116
1600	117
3300	118
793	120
AFORA antipanic brava antipanic ključavnica antipanic lock	121
9 SIGURNOSNE BRAVE ZA PROTUPROVALNA VRATA	
VARNOSTNE KLJUČAVNICE ZA PROTIVLOMNA VRATA	
SECURITY LOCKS FOR ARMORED DOORS	125
7056 PEN BLOC	126
7051 MRX	127
7456 RE-CODE	128
10 SISTEMI ZAKLJUČAVANJA	
ZAKLEPNI SISTEMI	
MASTER LOCKING SYSTEMS	129
Kontrola pristupa Kontrola pristopa Access Control	132
Sistem istog ključa Sistem enotnega ključa Keyed Alike	134
Sistem glavnog ključa Sistem glavnega ključa Master Key System	134
Sistem centralnog cilindra Sistem centralnega cilindra Central Cylinder System	135
Sistem centralnog cilindra s tehničkim glavnim ključem Sistem centralnega cilindra s tehničnim glavnim ključem Central Cylinder System with a Technical Master Key	136
Višestupnjevani sistem zaključavanja Večstopenjski sistem zaklepanja Small Grand Master Key System	137
Sistem generalnog ključa Sistem generalnega ključa Grand Master Key System	138
Izvedbe i funkcije Izvedbe in funkcije Types and Functions	139
Cilindri za sisteme zaključavanja Cilindri za zaklepne sisteme Master Locking System Cylinders	140
Integracija sistema zaključavanja i kontrole pristupa Integracija zaklepnega sistema in kontrole dostopa Master Locking Systems and Access Control Integration	141
Specijalni servisni cilindri za sisteme zaključavanja Specijalni servisni cilindri za zaklepne sisteme Partner Profile Cylinders (TL, W, ix 6 SR, ix Gamma, ix DAS, Sigma Plus)	142
11 TITAN COPY CENTER	145
Titan Easy	146
Titan Punto	148
Ninja	150
Ninja Vortex	152
Ključarski radni stol Delovna miza Locksmith Display for Key Cutting Machine	154
Stalak za ključeve Stojalo za ključe Keys Display	154
Titan akademija Titan akademija Titan Academy	155



PREDSTAVLJANJE PODUZEĆA PREDSTAVITEV PODJETJA COMPANY PRESENTATION

HR

SLO

EN

Ukratko o TITANU

Proizvodnja TITANA je pokrenuta 1896. godine u Kamniku u Sloveniji, EU.

Jedan od rijetkih proizvođača koji imaju stoljetnu tradiciju proizvodnje, a ono što i dalje drži TITAN u vrhu jest upravo spoj stoljetne tradicije te stalnog ulaganja u istraživanje i razvoj.

Prodaju TITANOVIH proizvoda možemo podijeliti u **5 robnih skupina**:

1. Cilindri i lokoti
2. Sistemi zaključavanja
3. Bravice za namještaj i ormariće
4. Brave za drvena, metalna PVC i aluminijska vrata
5. Sigurnosne brave, dodatna zaštita ulaznih vrata te antipanic brave

Ulaskom u **Grupaciju Securidev** 2002. godine TITANU je otvoreno veliko zapadnoeuropsko i svjetsko tržište.

Grupacija Securidev osobito se ističe u sljedećim područjima:

- kontrola pristupa (s brandovima DOM te Dény Fontaine)
- oprema za zaštitu (brand RONIS)
- oprema za zaštitu i sigurnost imovine (brandovi TITAN, Picard, DOM Metalux, UCEM).

Uz izbor iz TITANOVOG asortimana katalogu su pridruženi i dijelovi asortimana sestrinskih tvrtki: **CR Serrature, DOM Technologies, Euro-Elzett, Metaplast i RONIS.**

Na kratko o TITANU

Proizvodnja v TITANU se je začela 1896. Leta v Kamniku v Sloveniji, EU.

Eden od redkih proizvajalcev z več kot 100 letno tradicijo proizvodnje. Titan je vodilni proizvajalec v tem delu Evrope, ki vlaga v razvoj in nove tehnologije.

Prodajo TITANOVIH proizvodov lahko razdelimo v **5 skupin**:

1. Cilindri in obešanke
2. Zaklepni sistemi
3. Ključavnice za pohištvo in omarice
4. Ključavnice za lesena, kovinska in PVC vrata
5. Varnostne ključavnice, dodatne ključavnice in antipanic ključavnice za vhodna vrata

Kot delu grupe SECURIDEV od 2002. leta se je TITANU odprlo veliko zahodnoevropsko tržišče.

Grupacija SECURIDEV je posebno prisotna na področjih:

- kontrola pristopa (firmi DOM in Dény Fontaine)
- ključavnice za industrijsko vgradnjo (firma RONIS)
- izdelki za tehnično zaščito lastnine (firme TITAN, Picard, DOM Metalux, UCEM).

Poleg TITANOVEGA asortimana so v katalogu še izdelki sestrskih podjetij: **CR Serrature, DOM, Euro-Elzett, Metaplast in RONIS.**

About TITAN

In 1896 year TITAN starts with production in Kamnik, Slovenia, EU.

One of few companies with almost 120 years of tradition in locks production in combination with continuous research and development keeps TITAN on the top.

Sales of TITAN products can be divided in **5 product groups**:

1. Cylinders and padlocks
2. Locking systems
3. Cam locks and furniture locks
4. Locks for wooden, metal, PVC and aluminum doors
5. Security locks, additional door locks and antipanic locks

With integration of TITAN in **Securidev Group** at 2002 TITAN enters big Westeuropean and World market.

Securidev Group stand up in following areas:

- Access Control (brand DOM and Dény Fontaine)
- Protection equipment (Ronis)
- Equipment for property protection and security (brands TITAN, Picard, DOM Metalux, UCEM).

With selected items from TITAN range in this catalogue, a part of presented assortment is produced by our syster companies: **CR Serrature, DOM Technologies, Euro-Elzett, Metaplast i RONIS.**

HR

SLO

EN

Sestrinske tvrtke

DOM Technologies

Brühl / Köln / Njemačka

DOM je svjetski poznat njemački proizvođač ultimativne preciznosti i kvalitete:

- sigurnosnih cilindričnih uložaka i sistema zaključavanja
 - elektroničke kontrole pristupa
 - industrijskih bravica za ormariće i namještaj
- 1936 - Josef Voss osnovao trgovačko poduzeće u Kölnu.
- 1961 - Početak proizvodnje europrofilnog cilindra
- 1970 - Predstavljanje reverzibilnog sistema zaključavanja (ix serije), svjetska inovacija

2000 - Predstavljanje DOM ELS – elektronske kontrole pristupa

2005 - Spajanje u Securidev grupaciju

CR Serrature

Torino / Italija

CR Serrature je poznati talijanski proizvođač sigurnosnih brava za standardna i protuprovalna vrata; brave za drvena i metalna vrata, na jednu ili više točaka zatvaranja.

1955 - Osnivanje poduzeća

1992 - Spajanje u Securidev grupaciju

Euro-Elzett

Sopron / Mađarska

Euro-Elzett je jedan od vodećih mađarskih proizvođača brava za drvena, metalna PVC i aluminijska vrata na jednu i više točaka zatvaranja.

1901 - Osnivanje poduzeća

1992 - Spajanje u Securidev grupaciju

Metalplast

Częstochowa / Poljska

Metalplast je poznati poljski proizvođač brava za drvena, metalna PVC i aluminijska vrata.

1899 - Osnivanje poduzeća

2004 - Spajanje u Securidev grupaciju

Ronis

Sancoins / Francuska

Ekspert za industrijske bravice specijalno dizajnirane za metalne ormariće i namještaj, elektronske uređaje, poštanske ormariće, kolica, automobilsku industriju itd.

1916 - Osnivanje poduzeća

1990 - Spajanje u Securidev grupaciju

Sestrskse firme

DOM Technologies

Brühl / Köln / Nemčija

DOM je svetovno znan proizvajalec visoko kvalitetnih:

- varnostnih cilindričnih ključavnic in zaklepnih sistemov
- elektronske kontrole pristopa
- industrijskih ključavnic za omarice in pohišstvo

1936 - Josef Voss je osnoval trgovsko podjetje v Kölnu

1961 - Zacetek proizvodnje evropskega profilnega cilindra

1970 - Predstavitev cilindra s simetričnim ključem (ix serije), svetovna inovacija

2000 - Predstavitev DOM ELS - elektronske kontrole pristopa

2005 - integracija v grupo SECURIDEV

CR Serrature

Torino / Italija

CR Serrature je poznan italijanski proizvajalec varnostnih ključavnic za standardna in protivlomna vrata; ključavnice za lesena in kovinska vrata, z eno ali več točkami zaklepanja.

1955 - Ustanovitev podjetja

1992 - Integracija v grupo SECURIDEV

Euro-Elzett

Sopron / Madžarska

Euro-Elzett je poznan madžarski proizvajalec ključavnic za lesena, kovinska, PVC in aluminijska vrata, z eno ali več točkami zaklepanja.

1901 - Ustanovitev podjetja

1992 - Integracija v grupo SECURIDEV

Metalplast

Częstochowa / Poljska

Metalplast je poznan poljski proizvajalec ključavnic za lesena, kovinska, PVC in aluminijska vrata.

1899 - Ustanovitev podjetja

2004 - Integracija v grupo SECURIDEV

Ronis

Sancoins / Francuska

Strokovnjak za industrijske ključavnice posebej razvite za omarice in pohišstvo, elektronske naprave, poštne nabiralnike, vozičke, avtomobilsko industrijo, itd.

1916 - Ustanovitev podjetja

1990 - Integracija v grupo SECURIDEV

Sister Companies

DOM Technologies

Brühl / Cologne / Germany

DOM is world famous german producer with products of ultimative precision and quality:

- security cylinders locks and locking system
- electronic access control
- industry cam locks and furniture locks

1936 - Josef Voss founds a trading company in Cologne

1961 - Start of Euro profile cylinder production

1970 - Introduction of the reversible key systems (ix series) - world innovation

2000 - Introduction of DOM ELS (Electronic Locking System)

2005 - Integration in the Securidev Group

CR Serrature

Torino / Italy

CR Serrature is famous Italian security locks producer for standard and armoured doors; locks for wooden and metal doors, single-point and multipoint locks.

1955 - Founded

1992 - Integration in the Securidev Group

Euro-Elzett

Sopron / Hungary

Euro-Elzett is famous hungarian locks producer; locks for wooden, metal, PVC and aluminium doors, single-point and multipoint locks.

1901 - Founded

1992 - Integration in the Securidev Group

Metalplast

Częstochowa / Poland

Metalplast is famous polish locks producer; locks for wooden, metal, PVC and aluminium doors.

1899 - Founded

2004 - Integration in the Securidev Group

Ronis

Sancoins / France

Expert in the business of locks specially designed for metal furniture and office furniture, electrical equipment, letter boxes, trolley locks, automobile accessories, etc.

1916 - Founded

1990 - Integration in the Securidev Group



PROFILNI CILINDRI
PROFILNI CILINDRI
PROFILE CYLINDERS

T200

5 god. jamstva
let garancije
years warranty



Zašto izabrati T200? Zakaj izabrati T200? Why choose T200?



- HR • patentirani dvojni meh-
zam zaključavanja

SLO • patentiran dvojni zaklepni mehanizem

- EN • patented double locking mechanism

- specijalna funkcija ASC - kontrolirana zona lomljenja cilindra

- specialna funkcija ASC območje kontroliranega loma cilindra

- special function ASC - Anti-Snap Cylinder with controlled breaking zone

- sigurnosni elementi protiv agresivnih provalničkih metoda

- varnostni elementi proti agresivnim vlomilskim metodam

- security elements against aggressive breaking techniques

- sigurnosni elementi protiv inteligentnih provalničkih metoda

- varnostni elementi proti naprednim vlomilskim metodam

- security elements against intelligent breaking techniques

- robusan ključ od novog srebra dostupan u 3 izvedbe

- robusten ključ iz novega srebra v treh izvedbah

- robust nickel silver key
available in 3 different head versions

HR

- elementi sigurnosti mehanizma: patentirani dvojni mehanizam (klinovi / lamele), 11 elementa u mehanizmu zaključavanja (5 aktivnih elementa žlijeznog mehanizma ("zmije"), 6 klinova na opruzi)
- više od 362 milijuna kombinacija
- vlasnička kartica
- ključevi od novog srebra*
- dostupne 3 izvedbe ključa: plava ili crna plastična glava; metalna glava
- izrada ključeva u tvornici ili kod ovlaštenih servisnih centara TITAN
- otporan na provalničke tehnike: potiskivanje klinova, češljanje, bušenje tijela i jezgre, bumping
- pogodan za protuprovalna vrata - dugi vrat ključa
- opcija: specijalna funkcija ASC (Anti-Snap Cylinder)

* standardni broj ključeva uz cilindar: Hrvatska - 5, Slovenija - 4 ili prema narudžbi

SLO

- varnostni elementi mehanizma: patentiran dvojni mehanizem (klin/lamela), 11 elementov v zaklepem mehanizmu (5 aktivnih lamel (kača na ključu), 6 aktivnih klinov
- več kot 362 milijonov kombinacij
- lastniška kartica
- ključi iz novega srebra*
- možne 3 izvedbe ključa: modra ali črna plastična glava; kovinska glava
- izdelava ključev: pri proizvajalcu in pri pooblaščenih servisnih centrih
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / vrtenje oklepa in jedra / bumping
- primeren za protivlomna vrata - dolgi vrat ključa
- opcija: specialna funkcija ASC (Anti-Snap Cylinder)

* standardno število ključev pri cilindru: Hrvaška - 5, Slovenija - 4 ali po naročilu

EN

- security elements in mechanism: patented double locking mechanism (pins / wafers), 11 elements in locking mechanism (5 active elements in wafer mechanism (snake), 6 tumbler pins
- more than 362 million locking combinations
- owner's cards
- nickel silver keys*
- available in 3 head options: blue or black plastic head; metal head
- key cutting in factory or at TITAN authorised partner services
- resistant on breaking techniques: pushing pins / picking / body or core drilling / bumping
- suitable for armoured doors - long key neck
- option: special function ASC (Anti-Snap Cylinder)

* standard number of keys in set with cylinder: Croatia - 5,
Slovenia - 4 or acc. to order



K66


5 god. jamstva
let garancije
years warranty



Zašto izabrati K66? Zakaj izbrati K66? Why choose K66?



- HR • trostruki mehanizam zaključavanja (osnovni, gornji, bočni)
- SLO • trojni zaklepni mehanizem (osnovni, zgornji, stranski)
- EN • triple locking mechanism (basic, upper and side)



- sigurnosni elementi protiv agresivnih provalničkih metoda
- varnostni elementi proti agresivnim vlomskim metodam
- security elements against aggressive breaking techniques



- sigurnosni elementi protiv inteligentnih provalničkih metoda
- varnostni elementi proti naprednim vlomilskim metodam
- security elements against intelligent breaking techniques



- robustan ključ od novog srebra s oznakama u različitim bojama
- robusten ključ iz novega srebra z oznako v različnih barvah
- robust nickel silver key available with marks in assorted colours

K66

HR

- elementi sigurnosti mehanizma: 15 elementa u mehanizmu zaključavanja / 6 aktivnih klinova na opruzi / do 5 horizontalnih kontrolnih klinova / do 5 vertikalnih kontrolnih klinova
- 16 milijuna kombinacija
- vlasnička kartica
- ključevi od novog srebra*: rupice duž profila / rupice na boku profila
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje tijela i jezgre (kaljeni klinovi) / bumping
- izrada ključeva: u tvornici te kod većine servisnih centara
- pogodan za protuprovalna vrata - dugi vrat ključa

* standardni broj ključeva uz cilindar: Hrvatska - 5, Slovenija - 4 ili prema narudžbi

S|O

- elementi varnostnega mehanizma: 15 elementov v zaklepnem mehanizmu / 6 aktivnih klinov / do 5 stranskih kontrolnih klinov / do 5 zgornjih kontrolnih klinov
- 16 milijonov kombinacij
- lastniška kartica
- ključi iz novega srebra*: kalote po profilu / kalote na boku profila
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / vrtnenje oklepa in jedra / bumping
- izdelava ključev: pri proizvajalcu ali pri večini servisnih centrov
- primeren za protivlomna vrata - dolg vrat ključa

* standardno število ključev pri cilindru: Hrvaška - 5,
Slovenija - 4 ali po naročilu

EN

- security elements in mechanism: 15 elements in locking mechanism / 6 tumbler pins / up to 5 upper control pins / up to 5 side control pins
- 16 million locking combinations
- owner's cards
- nickel silver keys*: holes along the profile / holes on the side of profile
- resistant on breaking techniques: pins pushing / picking / body or core drilling (hardened pins) / bumping
- key cutting in factory and most key cutting services
- suitable for armoured doors - long key neck

* standard number of keys in set with cylinder: Croatia - 5, Slovenia - 4 or acc. to order



K55

5 god. jamstva
let garancije
years warranty



Zašto izabrati K55? Zakaj izbrati K55? Why choose K55?



- HR • dvostrani mehanizam zaključavanja (osnovni i gornji)

- dvojni zaklepni mehanizem (osnovni in zgornji)

- EN • double side locking mechanism (basic and upper)

- specijalna funkcija ASC - kontrolirana zona lomljenja cilindra

- specialna funkcija ASC območje kontroliranega loma cilindra

- special function ASC – Anti-Snap Cylinder with controlled breaking zone

- sigurnosni elementi protiv agresivnih provalničkih metoda

- varnostni elementi proti agresivnim vlomilskim metodam

- security elements against aggressive breaking techniques

- sigurnosni elementi protiv inteligentnih provalničkih metoda

- varnostni elementi proti naprednim vlomilskim metodam

- security elements against intelligent breaking techniques

- ergonomski ključ s plastičnom glavom u više boja

- ergonomska oblika ključa s plastično glavo v različnih barvah

- Ergonomic key with head available in various colours

HR

SLO

EN

- elementi sigurnosti mehanizma: 10 elementa u mehanizmu zaključavanja / 5 aktivnih klinova na opruzi / 5 vertikalnih kontrolnih klinova
- 100.000 kombinacija
- vlasnička kartica
- ključevi* dostupni u 7 boja (crna, plava, crvena, zelena, roza, žuta, narančasta)
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje - zaštita od bušenja tijela / bumping
- pogodan za protuprovalna vrata: dugi vrat ključa
- izrada ključeva: u tvornici te kod većine servisnih centara
- opcija: specijalna funkcija ASC (Anti-Snap Cylinder)

* standardni broj ključeva uz cilindar: Hrvatska - 5, Slovenija - 4 ili prema narudžbi

- elementi varnostnega mehanizma: 10 elementov v zaklepem mehanizmu / 5 aktivnih klinov / 5 zgornjih kontrolnih klinov
- 100.000 kombinacij
- lastniška kartica
- ključič* v 7 barvah (črna, modra, rdeča, zelena, roza, rumena, oranžna)
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / vrtnenje oklepa in jedra / bumping
- primeren za protivlomna vrata: dolg vrat ključa
- izdelava ključev: pri proizvajalcu in pri večini servisnih centrov
- opcija: specialna funkcija ASC (Anti-Snap Cylinder)

* standardno število ključev pri cilindru: Hrvaška - 5,
Slovenija - 4 ali po naročilu

- security elements in mechanism: 10 elements in locking mechanism / 5 tumbler pins / 5 upper control pins
- 100.000 locking combinations
- owner's cards
- keys available in 7 colours (black, blue, red, green, rose, yellow, orange)
- resistant on breaking techniques: pins pushing / picking / body drilling / bumping
- suitable for armoured doors - long key neck
- key cutting in factory and most key cutting services
- option: special function ASC (Anti-Snap Cylinder)

* standard number of keys in set with cylinder: Croatia - 5,
Slovenia - 4 or acc. to order



ix Saturn

5 god. jamstva
let garancije
years warranty



Zašto izabrati ix Saturn? Zakaj izbrati ix Saturn? Why choose ix Saturn?



HR	patentirani trostruki mehanizam zaključavanja s blokirajućom letvom	modularno tijelo: protu-lomnost i fleksibilnost dimenzija	sigurnosni elementi protiv agresivnih provalničkih metoda	sigurnosni elementi protiv inteligentnih provalničkih metoda	robustan ključ od novog srebra s mobilnim diskom u profilu pod 45°
SLO	patentiran trojni mehanizem zaklepanja z zaskočno letvijo	modularen oklep: protivlomen in fleksibilnost dimenzij	varnostni elementi proti agresivnim vlomilskim metodam	varnostni elementi proti naprednim vlomilskim metodam	robusten ključ iz novega srebra z premikajočim se diskom pod 45°
EN	patented triple locking mechanism with blocking bar	modularity - against breaking and plug pulling; dimension flexibility	security elements against aggressive breaking techniques	security elements against intelligent breaking techniques	robust new silver key with 45° floating bearing roller

HR

S|O

EN

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> • elementi sigurnosti mehanizma: 24 elemenata u mehanizmu zaključavanja / 9 klinova na opruzi / 1 horizontalna letva sa 3 kontrolna klina / do 10 kontrolnih klinova / 1 klin za lebdeći disk u profilu ključa • 2 vlasničke kartice • 3 ključa od novog srebra: rupice duž profila / rupice na boku / izbočenja na profilu / mobilni disk pod 45° u profilu ključa • funkcija 2 u 1: u setu sa sigurnosnim uloškom se isporučuju 3 ključa za prvu upotrebu i 3 dodatna ključa za drugu upotrebu • izrada ključeva samo u tvornici (DOM, Njemačka) • otporan na provalničke tehnike: potiskivanje klinova / češljanje / izvlačenje jezgre / bušenje / bumping / lomljenje cilindra • standardna opcija: modularnost • pogodan za protuprovalna vrata: dugi vrat ključa + opcija crvena i/ili antracit siva kapica | <ul style="list-style-type: none"> • elementi varnostnega mehanizma: 24 elementov v zaklepnem mehanizmu / 9 klinov v jedru / 1 horizontalna letev s tremi kontrolnimi klini / do 10 kontrolnih klinov / 1 klin za premikajoči se disk v profilu ključa • lastniška kartica x2 • 3 ključji iz novega srebra: kalote po profilu / kalote na boku / izboklina na profilu / premikajoči se disk pod 45° v profilu ključa • funkcija 2 v 1: v setu z varnostnim vložkom se dobavijo 3 ključji za prvo uporabo in dodatni 3 ključji za drugo uporabo • izdelava ključev samo pri proizvajalcu (DOM, Nemčija) • odporen na vlomilske tehnike: potiskanje klinov / tipanje / izvlačenje jedra / vrtnanje / bumping / lomljenje cilindra • standardna opcija: modularen oklep • primeren za protivlomna vrata: dolg vrat ključa + opcija rdeča in/ali antracitno siva glava | <ul style="list-style-type: none"> • security elements in mechanism: 24 elements in locking mechanism / 9 tumbler pins / 1 blocking bar with 3 side control pins / up to 10 upper controlling pins / 1 pin corresponds with 45° floating bearing roller • 2 security cards for option 2in1 • 3 new silver keys: holes along the profile / holes on the side of profile / extensions on profiles / 45° floating bearing roller in profile • function 2 in 1: in set with security cylinder is delivered 3 keys for 1st use and 3 keys for 2nd use • key cutting could be made only in factory (DOM, Germany) • resistant on breaking techniques: pins pushing / picking / body or core drilling (hardened pins) / bumping / breaking and plug pulling • standard option: modularity • suitable for armoured doors - long key neck + option red and/or anthracite grey key cap |
|--|--|--|



ix 6 SR

5 god. jamstva
let garancije
years warranty



Zašto izabrati ix 6 SR? Zakaj izabrati ix 6 SR? Why choose ix 6 SR?



- | | | | | |
|---|--|---|--|--|
| <p>HR</p> <ul style="list-style-type: none"> patentirani trostruki mehanizam zaključavanja s blokirajućom letvom <p>SLO</p> <ul style="list-style-type: none"> patentiran trojni mehanizam zaklepanja z zaskočno letvijo <p>EN</p> <ul style="list-style-type: none"> patented triple locking mechanism with blocking bar | <ul style="list-style-type: none"> modularno tijelo: protu-lomnost i fleksibilnost dimenzija modularen oklep: protivlomen in fleksibilnost dimenzij modularity - against breaking and plug pulling; dimension flexibility | <ul style="list-style-type: none"> sigurnosni elementi protiv agresivnih provalničkih metoda varnostni elementi proti agresivnim vlomilskim metodam security elements against aggressive breaking techniques | <ul style="list-style-type: none"> sigurnosni elementi protiv inteligentnih provalničkih metoda varnostni elementi proti naprednim vlomilskim metodam security elements against intelligent breaking techniques | <ul style="list-style-type: none"> robustan ključ od novog srebra s mobilnim diskom u profilu pod 45° robusten ključ iz novega srebra z premikajočim se diskom pod 45° robust new silver key with 45° floating bearing roller |
|---|--|---|--|--|

HR

- elementi sigurnosti mehanizma: 23 elementa u mehanizmu zaključavanja / 7 aktivnih elemenata / 5 klinova na opruzi / 1 horizontalna letva s do 10 klinova / do 4 kontrolna klina / 1 klin za lebdeći disk u profilu ključa pod 45°
- vlasnička kartica
- ključevi od novog srebra*: rupice duž profila / rupice na boku / izbočenja na profilu / mobilni disk pod 45° u profilu ključa
- izrada ključeva samo u Titanu
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje / bumping / lomljenje cilindra i izvlačenje jezgre - opcija modular
- opcija: modularno tijelo cilindra
- pogodan za protuprovalna vrata: dugi vrat ključa + opcija crvena i/ili antracit siva kapica

* standardni broj ključeva uz cilindar: Hrvatska - 5, Slovenija - 3 ili prema narudžbi

SLO

- elementi varnostnega mehanizma: 23 elementov v zaklepem mehanizmu / 7 aktivnih klinov / 5 klinov v jedru / 1 horizontalna letev z do 10 klini / do 4 kontrolnih klinov / 1 klin za premikajoči se disk v profilu ključa pod 45°
- lastniška kartica
- 3 ključiči* iz novega srebra: kalote po profilu / kalote na boku / izboklina na profilu / premikajoči se disk pod 45° v profilu ključa
- izdelava ključev samo v Titanu
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / izvlačenje jedra - razred BZ(opcija) / vrtanje / bumping / lomljenje cilindra (opcija)
- opcija: modularen oklep
- primeren za protivlomna vrata: dolg vrat ključa + opcija rdeča in/ali antracitno siva glava

* standardno število ključev pri cilindru: Hrvaška - 5, Slovenija - 3 ali po naročilu

EN

- security elements in mechanism: 23 elements in locking mechanism / 7 active elements / 5 tumbler pins / 1 blocking bar with 3 side control pins / up to 4 upper controlling pins / 1 pin corresponds with 45° floating bearing roller
- systemcard
- new silver keys*: holes along the profile / holes on the side of profile / extensions on profiles / 45° floating bearing roller in profile
- key cutting could be made only in TITAN
- resistant on breaking techniques: pins pushing / picking / body or core drilling (hardened pins) / bumping / (breaking and plug pulling – option modular cylinder BZ)
- option: modularity
- suitable for armoured doors - long key neck + option red and/or anthracite grey key cap

* standard number of keys in set with cylinder: Croatia - 5, Slovenia - 3 or acc. to order



ix DAS

5 god. jamstva
let garancije
years warranty



Zašto izabrati ix DAS? Zakaj izbrati ix DAS? Why choose ix DAS?



- patentirani mehanizam zaključavanja visokih i dubokih utora u profilu klučaka

- patentiran mehanizem za-
klepanja visokih in globokih
utorov v profilu ključa

- EN • patented locking mechanism with high and deep milling on key profile

- modularno tijelo: protu-
lomnost i fleksibilnost
dimenzija

- modularen oklep: protivlomen in fleksibilnost dimenzij

- modularity - against breaking and plug pulling; dimension flexibility

- sigurnosni elementi protiv agresivnih provalničkih metoda

- varnostni elementi
proti agresivnim vlomskim
metodam

- security elements against aggressive breaking techniques

- sigurnosni elementi protiv inteligentnih provalničkih metoda

- varnostni elementi proti naprednim vlomilskim metodam

- security elements against intelligent breaking techniques

- robusan ključ od novog srebra

- robusten ključ iz novega srebra

- robust nickel silver key

HR

SIO

FN

- elementi sigurnosti mehanizma: 21 element u mehanizmu zaključavanja / 5 klinova na opruzi / do 6 horizontalnih kontrolnih klinova / do 6 vertikalnih kontrolnih klinova
- vlasnička kartica
- ključevi od novog srebra*: rupice duž profila / rupice na boku / izbočenja na profilu
- izrada ključeva samo u Titanu
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje / bumping / lomljenje cilindra i izvlačenje jezgre - opcija modular
- opcija: modularno tijelo cilindra
- pogodan za protuplodna vrata: dugi vrat ključa + opcija crvena i/ili antracit siva kapica

* standardni broj ključeva uz cilindar: Hrvatska - 5, Slovenija - 3 ili prema narudžbi

- elementi varnostnega mehanizma: 21 elementov v zaklepnem mehanizmu / 5 klinov v jedru / do 6 horizontalnih kontrolnih klinov / do 6 vertikalnih kontrolnih klinov
- lastniška kartica
- ključji iz novega srebra*: kalote po profilu / kalote na boku / izbokline na profilu
- izdelava ključev samo v Titanu
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / izvlačenje jedra / vrtnje / bumping / lomljenje cilindra
- opcija: modularen oklep
- primeren za protivlomna vrata: dolg vrat ključa + opcija rdeča in/ali antracitno siva glava

* standardno število ključev pri cilindru: Hrvaška - 5,
Slovenija - 3 ali po naročilu

- security elements in mechanism: 21 elements in locking mechanism / 5 tumbler pins / up to 6 upper controlling pins / up to 6 side controlling pins
- systemcard
- new silver keys*: holes along the profile / holes on the side of profile / extensions on profile
- key cutting could be made only in TITAN
- resistant on breaking techniques: pins pushing / picking / body or core drilling (hardened pins) / bumping / (breaking and core pulling – option modular cylinder BZ)
- option: modularity
- suitable for armoured doors - long key neck + option red and/or anthracite grey key cap

* standard number of keys in set with cylinder: Croatia - 5,
Slovenia - 3 or acc. to order



DOM **diamant**

5 god. jamstva
let garancije
years warranty



- specijalni mehanizam rotirajućih diskova: 35 elemenata u mehanizmu zaključavanja / 21 rotirajući čelični disk / 3 horizontalne letve
- vlasnička kartica
- 3 ključa: 3D laserska izrada / visokootporni čelik / ergonomski oblik
- iznimna čvrstoća cilindra: tijelo od nehrđajućeg čelika / oblikovanje ubrizgavanjem metala (MIM)
- samo jedan stroj na svijetu izrađuje ključeve (tvornica DOM, Njemačka)
- iznimno otporan na provalničke tehnike: češljanje / izvlačenje jezgre / bušenje / bumping / lomljenje cilindra
- protupožarni atest / ISO 9001:2008 / VdS certifikat
- pogodan za protuprovalna vrata: dugi vrat ključa + opcija dodatno produženi vrat

HR

DOM ix Saturn



5 god. jamstva
let garancije
years warranty



- elementi sigurnosti mehanizma: 24 elemenata u mehanizmu zaključavanja / 9 klinova na opruzi / 1 horizontalna letva sa 3 kontrolna klina / do 10 kontrolnih klinova / 1 klin za lebdeći disk u profilu ključa
- 2 vlasničke kartice
- 3 ključa od novog srebra: rupice duž profila / rupice na boku / izbočenja na profilu / mobilni disk pod 45° u profilu ključa
- funkcija 2 u 1: u setu sa sigurnosnim uloškom se isporučuju 3 ključa za prvu upotrebu i 3 dodatna ključa za drugu upotrebu
- izrada ključeva samo u tvornici (DOM, Njemačka)
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / izvlačenje jezgre / bušenje / bumping / lomljenje cilindra
- protupožarni atest / VdS sertifikat
- pogodan za protuprovalna vrata: dugi vrat ključa + opcija crvena i/ili siva kapica

TITAN T250



5 god. jamstva
let garancije
years warranty



- elementi sigurnosti mehanizma: patentirani dvojni mehanizmom (klinovi / lamele) / 11 elementa u mehanizmu zaključavanja / 5 aktivnih elementa žlijebnog mehanizma ("zmije") / 6 klinova na opruzi / do 5 bočnih kontrolnih klinova
- više od 362 milijuna kombinacija
- vlasnička kartica
- ključevi od novog srebra*: rupice duž profila i žlijeb na profilu ("zmija")
- izrada ključeva u tvornici ili kod ovlaštenih servisnih centara TITAN, isključivo uz predodženu vlasničke kartice
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje tijela i jezgre / bumping / lomljenje i čupanje jezgre
- pogodan za protuprovalna vrata: dugi vrat ključa
- opcija: specijalna funkcija ASC - Anti-Snap Cylinder
- šifra sirovoq ključa: T250 + oznaka zmije

* standardni broj ključeva uz cilindar: Hrvatska - 5, Slovenija - 4 ili prema narudžbi

SLO

- specialni mehanizem vrtljivih diskov: 35 elementov v zaklepnem mehanizmu / 21 vrtljivih jeklenih diskov / 3 horizontalne letve
- lastniška kartica
- 3 ključi: 3D laserska izdelava / visoko trdno jeklo / ergonomska oblika
- izjemna trdota cilindra: oklep iz nerjavečega jekla / izdelava z injekcijskim litjem kovine (MIM)
- samo en stroj na svetu izdeluje ključke (DOM, Nemčija)
- izjemno odporen na vlomilske tehnike: tipanje / izvlačanje jedra / vrtanje / bumping / lomljenje cilindra
- protipožarni atest / ISO 9001:2008 / VdS certifikat
- primeren za protivlomna vrata: dolg vrat ključa + opcija dodatno podaljšan vrat

EN

- special mechanism of rotating discs: 35 elements in locking mechanism / 21 stainless steel rotating discs on ball-bearings / 3 horizontal blocking bars
- registration card
- 3 keys: 3D CNC made/ high durable stainless steel / ergonomic key head shape
- high resistant: outside housing made from stainless steel / MIM technology / inside Duracast
- only one key cutting machine in the whole world (factory DOM, Germany)
- highly resistant: picking / drilling / bumping / breaking / plug pulling
- standard option: modularity
- fireproof / ISO 9001:2008 / VdS certificate
- suitable for armoured doors + extra option long key neck

- elementi varnostnega mehanizma: 24 elementov v zaklepnem mehanizmu / 9 klinov v jedru / 1 horizontalna letva s tremi kontrolnimi klini / do 10 kontrolnih klinov / 1 klin za premikajoči se disk v profilu ključa
- lastniška kartica
- 3 ključi iz novega srebra: kalote po profilu / kalote na boku / izboklina na profilu / premikajoči se disk pod 45° v profilu ključa
- funkcija 2 v 1: v setu z varnostnim vložkom se dobavijo 3 ključi za prvo uporabo in dodatni 3 ključi za drugo uporabo
- izdelava ključev samo pri proizvajalcu (DOM, Nemčija)
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / izvlačanje jedra / vrtanje / bumping / lomljenje cilindra
- primeren za protivlomna vrata: dolg vrat ključa + opcija rdeča in/ali antracitno siva glava

- security elements in mechanism: 24 elements in locking mechanism / 9 tumbler pins / 1 blocking bar with 3 side control pins / up to 10 upper controlling pins / 1 pin corresponds with 45° floating bearing roller
- 2 security cards for option 2 in 1
- 3 new silver keys: holes along the profile / holes on the side of profile / extensions on profiles / 45° floating bearing roller in profile
- function 2 in 1: in set with security cylinder is delivered 3 keys for 1-st use and 3 keys for 2-end use
- key cutting could be made only in factory (DOM, Germany)
- resistant on breaking techniques: pins pushing / picking / body or core drilling (hardened pins) / bumping / breaking and plug pulling
- standard option: modularity
- suitable for armoured doors - long key neck + option red and/or anthracite grey key cap

- varnostni elementi mehanizma: patentiran dvojni mehanizem (klini/lamela) / 11 elementov v zaklepnem mehanizmu / 5 aktivnih lamel (kača na ključu) / 6 aktivnih klinov / do 5 stranskih kontrolnih klinov
- več kot 326 milijonov kombinacij
- lastniška kartica
- ključi iz novega srebra*: kalote vzdolž profila in na boku ter utor na profilu ("kača")
- izdelava ključev v tovarni ali pri pooblaščenih servisnih centrih TITAN, samo z lastniško kartico
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / vrtanje oklepa in jedra / bumping
- primeren za protivlomna vrata: dolg vrat ključa
- opcija: specialna funkcija ASC- Anti-Snap Cylinder
- koda surovega ključa: T250+ oznaka kače

* standardno število ključev pri cilindru: Hrvaška-5, Slovenija - 4 ali po naročilu

- security elements in mechanism: patented double locking mechanism (pins/ wafers), 13 elements in locking mechanism (5 active elements in wafer mechanism (snake)/ 6 tumbler pins / up to 5 side controlled pins
- more than 362 million locking combinations
- owner's cards
- nickel silver keys*: holes along the profile + wafer line (snake) / holes on the side of profile
- available in 3 head options: blue or black plastic head; metal head
- key cutting in factory or at TITAN authorised partner services (only with owner's cards)
- resistant on breaking techniques: pushing pins / picking / body or core drilling / bumping / breaking-option ASC
- suitable for armoured doors - long key neck
- option: special function ASC (Anti-Snap Cylinder)
- blank key code: T250 + wafer line code

* standard number of keys in set with cylinder: Croatia - 5, Slovenia - 4 or acc. to order

DOM ix 6 SR

5 god. jamstva
let garancije
years warranty


**HR**

- elementi sigurnosti mehanizma: 23 elementa u mehanizmu zaključavanja / 7 aktivnih elemenata / 5 klinova na opruzi / 1 horizontalna letva s do 10 klinova / do 4 kontrolna klina / 1 klin za lebdeći disk u profilu ključa
- vlasnička kartica
- ključevi* od novog srebra: rupice duž profila / rupice na boku / izbočenja na profilu / mobilni disk pod 45° u profilu ključa
- izrada ključeva samo u Titanu
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / izvlačenje jezgre – BZ razred (opcija) / bušenje / bumping / lomljenje cilindra (opcija)
- protupožarni atest / VdS certifikat
- opcija: modularno tijelo cilindra
- pogodan za protuprovalna vrata: dugi vrat ključa + opcija crvena i/ili siva kapica

* standardni broj ključeva uz cilindar: Hrvatska - 5, Slovenija - 3 ili prema narudžbi

TITAN T200

5 god. jamstva
let garancije
years warranty



- elementi sigurnosti mehanizma: patentirani dvojni mehanizmom (klinovi / lamele) / 11 elementa u mehanizmu zaključavanja / 5 aktivnih elemenata žlijebnog mehanizma ("zmije") / 6 klinova na opruzi
- više od 362 milijuna kombinacija
- vlasnička kartica
- ključevi od novog srebra*: rupice duž profila i žlijeb na profilu ("zmija")
- izrada ključeva u tvornici ili kod ovlaštenih servisnih centara TITAN, isključivo uz predodžbenje vlasničke kartice
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje tijela i jezgre / bumping / lomljenje i čupanje jezgre
- pogodan za protuprovalna vrata: dugi vrat ključa
- opcija: specijalna funkcija ASC - Anti-Snap Cylinder
- šifra sirovog ključa: T200 + oznaka zmije

* standardni broj ključeva uz cilindar: Hrvatska - 5, Slovenija - 4 ili prema narudžbi

DOM ix DAS

5 god. jamstva
let garancije
years warranty



- elementi sigurnosti mehanizma: 21 element u mehanizmu zaključavanja / 5 klinova na opruzi / do 6 horizontalnih kontrolnih klinova / do 6 vertikalnih kontrolnih klinova
- vlasnička kartica
- ključevi od novog srebra*: rupice duž profila / rupice na boku / izbočenja na profilu
- izrada ključeva samo u Titanu
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje / bumping / (lomljenje cilindra i izvlačenje jezgre - opcija modular)
- protupožarni atest
- opcija: modularno tijelo cilindra
- pogodan za protuprovalna vrata: dugi vrat ključa + opcija crvena i/ili siva kapica

* standardni broj ključeva uz cilindar: Hrvatska - 5, Slovenija - 3 ili prema narudžbi

SLO

- elementi varnostnega mehanizma: 23 elementov v zaklepnem mehanizmu / 9 aktivnih klinov / 5 klinov v jedru / 1 horizontalna letev z do 10 klini / do 4 kontrolnih klinov / 1 klin za premikajoči se disk v profilu ključa
- lastniška kartica
- 3 ključiči* iz novega srebra: kalote po profilu / kalote na boku / izboklina na profilu / premikajoči se disk pod 45° v profilu ključa
- izdelava ključev samo v Titanu
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / izvlačanje jedra - razred BZ (opcija) / vrtanje / bumping / lomljenje cilindra (opcija)
- opcija: modularen oklep
- primeren za protivlomna vrata: dolg vrat ključa + opcija rdeča in/ali antracitno siva glava

* standardno število ključev pri cilindru: Hrvaška - 5, Slovenija - 3 ali po naročilu

EN

- security elements in mechanism: 23 elements in locking mechanism / 7 active elements / 5 tumbler pins / 1 blocking bar with 3 side control pins / up to 4 upper controlling pins / 1 pin corresponds with 45° floating bearing roller
- systemcard
- nickel silver keys*: holes along the profile / holes on the side of profile / extensions on profiles / 45° floating bearing roller in profile
- key cutting could be made only in TITAN
- resistant on breaking techniques: pins pushing / picking / body or core drilling (hardened pins) / bumping / (breaking and core pulling – option modular cylinder BZ)
- option: modularity
- suitable for armoured doors - long key neck + option red and/or anthracite grey key cap

* standard number of keys in set with cylinder: Croatia - 5, Slovenia - 3 or acc. to order

- varnostni elementi mehanizma: patentiran dvojni mehanizem (klini/lamela) / 11 elementov v zaklepnem mehanizmu / 5 aktivnih lamel (kača na ključu) / 6 aktivnih klinov
- več kot 362 milijonov kombinacij
- lastniška kartica
- ključiči iz novega srebra*
- možne 3 izvedbe ključa: modra ali črna plastična glava; kovinska glava
- izdelava ključev: pri proizvajalcu in pri ovlaštenih servisnih centrov
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / vrtanje oklepa in jedra / bumping
- primeren za protivlomna vrata - dolg vrat ključa
- opcija: specialna funkcija ASC (Anti-Snap Cylinder)
- koda surovega ključa: T200 + oznaka kače

* standardno število ključev pri cilindru: Hrvaška - 5, Slovenija - 4 ali po naročilu

- security elements in mechanism: patented double locking mechanism (pins/ wafers), 11 elements in locking mechanism (5 active elements in wafer mechanism (snake)/ 6 tumbler pins
- more than 362 million locking combinations
- owner's cards
- nickel silver keys*: holes along the profile + wafer line (snake)
- available in 3 head options: blue or black plastic head; metal head
- key cutting in factory or at TITAN authorised partner services (only with owner's cards)
- resistant on breaking techniques: pushing pins / picking / body or core drilling / bumping / breaking-option ASC
- suitable for armoured doors - long key neck
- option: special function ASC (Anti-Snap Cylinder)
- blank key code: T200 + wafer line code

* standard number of keys in set with cylinder: Croatia - 5, Slovenia - 4 or acc. to order

- elementi varnostnega mehanizma: 21 elementov v zaklepnem mehanizmu / 5 klinov v jedru / do 6 horizontalnih kontrolnih klinov / do 6 vertikalnih kontrolnih klinov
- lastniška kartica
- ključiči iz novega srebra*: kalote po profilu / kalote na boku / izbokline na profilu
- izdelava ključev samo v Titanu
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / izvlačanje jedra / vrtanje / bumping / lomljenje cilindra
- opcija: modularen oklep
- primeren za protivlomna vrata: dolg vrat ključa + opcija rdeča in/ali antracitno siva glava

* standardno število ključev pri cilindru: Hrvaška - 5, Slovenija - 3 ali po naročilu

- security elements in mechanism: 21 elements in locking mechanism / 5 tumbler pins / up to 6 upper controlling pins / up to 6 side controlling pins
- systemcard
- nickel silver keys*: holes along the profile / holes on the side of profile / extensions on profile
- key cutting could be made only in TITAN
- resistant on breaking techniques: pins pushing / picking / body or core drilling (hardened pins) / bumping / (breaking and core pulling – option modular cylinder BZ)
- option: modularity
- suitable for armoured doors - long key neck + option red and/or anthracite grey key cap

* standard number of keys in set with cylinder: Croatia - 5, Slovenia - 3 or acc. to order

TITAN T100RX



5 god. jamstva
let garancije
years warranty



- elementi sigurnosti mehanizma: 14 elementa u mehanizmu zaključavanja / 6 aktivnih klinova na opruzi / 8 aktivnih bočnih klinova
- više od 136 milijuna kombinacija
- vlasnička kartica
- 4 ključa od novog srebra: rupice duž profila / lebdeći mobilni kotačić pod 90° u profilu ključa
- vertikalni X profil (jako otežan pristup provalničkim alatom)
- izrada ključeva u tvornici ili kod ovlaštenih servisnih centara TITAN, isključivo uz predočenje vlasničke kartice
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje tijela i jezgre (kaljeni klinovi) / bumping / otvaranje "element po element"
- šifra sirovog ključa: T100RX NS

HR

TITAN K66



5 god. jamstva
let garancije
years warranty



- elementi sigurnosti mehanizma: 15 elementa u mehanizmu zaključavanja / 6 aktivnih klinova na opruzi / do 4 horizontalna kontrolna klina / do 5 vertikalnih kontrolnih klinova
- 16 milijuna kombinacija
- vlasnička kartica
- ključevi od novog srebra*: rupice duž profila / rupice na boku profila
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje tijela i jezgre (kaljeni klinovi) / bumping
- izrada ključeva u tvornici te kod većine servisnih centara
- šifra sirovog ključa: K66 PPD6 NS

* standardni broj ključeva uz cilindar: Hrvatska - 5, Slovenija - 4 ili prema narudžbi

TITAN K56



5 god. jamstva
let garancije
years warranty



- elementi sigurnosti mehanizma: 11 elementa u mehanizmu zaključavanja / 6 aktivnih klinova na opruzi / 5 vertikalnih kontrolnih klinova
- 500.000 kombinacija
- vlasnička kartica
- ključevi od novog srebra*: rupice duž profila
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje - zaštita od bušenja tijela / bumping
- pogodan za protuprovalna vrata: dugi vrat ključa
- izrada ključeva u tvornici te kod većine servisnih centara
- šifra sirovog ključa: K56 NS

* standardni broj ključeva uz cilindar: Hrvatska - 5. Slovenija - 4 ili prema narudžbi

SLO

- varnostni elementi mehanizma: 14 elementov v zaklepnem mehanizmu / 6 aktivnih klinov / 8 aktivnih stranskih klinov
- več kot 136 milijonov kombinacij
- lastniška kartica
- 4 ključ iz novega srebra: kalote vzdolž profila / premikajoč kolesček v profilu ključa
- vertikalni profil X (zelo otežen dostop z vlomilskim orodjem)
- izdelava ključev v tovarni ali pri pooblaščenih servisnih centrih TITAN, samo z lastniško kartico
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / vrtnje oklepa in jedra (kaljeni klini) / bumping / odpiranje "element po elementu"
- koda surovega ključa: T100RX NS

EN

- security elements in mechanism: patented double locking mechanism (pins/ levers) / 14 elements in locking mechanism / 6 active pin tumblers / 8 active side levers
- more than 136 million locking combinations
- owner's cards
- 4 nickel silver keys: side holes along the profile / 90° roller in profile
- vertical X profile (extremely resistant to pick)
- key cutting in factory or at TITAN authorised partner services (only with owner's cards)
- resistant on breaking techniques: pushing pins, picking, body or core drilling, bumping
- blank key code: T100RX NS

- elementi varnostnega mehanizma: 15 elementov v zaklepnem mehanizmu / 6 aktivnih klinov / do 5 stranskih kontrolnih klinov / do 5 zgornjih kontrolnih klinov
- 16 milijonov kombinacij
- lastniška kartica
- ključ iz novega srebra*: kalote po profilu / kalote na boku profila
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / vrtnje oklepa in jedra (kaljeni klini) / bumping
- izdelava ključev: pri proizvajalcu ali pri večini servisnih centrov
- primeren za protivlomna vrata - dolg vrat ključa
- koda surovega ključa: K66 PPD6 NS

* standardno število ključev pri cilindru: Hrvaška - 5, Slovenija - 4 ali po naročilu

- security elements in mechanism: 15 elements in locking mechanism / 6 tumbler pins / up to 5 upper control pins / up to 5 side control pins
- 16 million locking combinations
- owner's cards
- nickel silver keys*: holes along the profile / holes on the side of profile
- resistant on breaking techniques: pins pushing / picking / body or core drilling (hardened pins) / bumping
- key cutting in factory and most key cutting services
- suitable for armoured doors - long key neck
- blank key code: K66 PPD6 NS

* standard number of keys in set with cylinder: Croatia - 5, Slovenia - 4 or acc. to order

- varnostni elementi mehanizma: 11 elementov v zaklepnem mehanizmu / 6 aktivnih klinov / 5 vertikalnih kontrolnih klinov
- 500.000 kombinacij
- lastniška kartica
- ključ iz novega srebra*: kalote vzdolž profila
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / vrtnje oklepa / bumping
- primeren za protivlomna vrata: dolg vrat ključa
- izdelave ključev v tovarni in v večini servisnih centrov
- koda surovega ključa: K56 NS

* standardno število ključev pri cilindru: Hrvaška-5, Slovenija 4 ali po naročilu

- security elements in mechanism: 11 elements in locking mechanism / 6 tumbler pins / till 5 upper control pins
- 500.000 locking combinations
- owner's cards
- nickel silver keys*: holes along the profile
- resistant on breaking techniques: pins pushing / picking / body drilling / bumping
- key cutting in factory and most key cutting services
- suitable for armoured doors - long key neck
- blank key code: K56 NS

* standard number of keys in set with cylinder: Croatia - 5, Slovenia - 4 or acc. to order

TITAN K55



5 god. jamstva
let garancije
years warranty



TITAN K5



3 god. jamstva
let garancije
years warranty



TITAN i6



3 god. jamstva
let garancije
years warranty



HR

- elementi sigurnosti mehanizma: 10 elementa u mehanizmu zaključavanja / 5 aktivnih klinova na opruzi / 5 vertikalnih kontrolnih klinova
- 100.000 kombinacija
- vlasnička kartica
- ključevi dostupni u 7 boja (crna, plava, crvena, zelena, roza, žuta, narančasta)*
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje - zaštita od bušenja tijela / bumping
- pogodan za protuprovalna vrata: dugi vrat ključa
- izrada ključeva u tvornici te kod većine servisnih centara
- opcija: specijalna funkcija ASC - Anti-Snap Cylinder
- šifra sirovoog ključa: K55 K5 MSNI + "boja"

* standardni broj ključeva uz cilindar: Hrvatska - 5, Slovenija - 4 ili prema narudžbi

- elementi sigurnosti mehanizma: 10 elementa u mehanizmu zaključavanja / 5 aktivnih klinova na opruzi / 5 vertikalnih kontrolnih klinova
- 100.000 kombinacija
- 4 ključa od novog srebra
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje - zaštita od bušenja tijela / bumping
- izrada ključeva u tvornici te kod velikog broja servisnih centara
- šifra sirovog ključa: K5 MSNI

- elementi sigurnosti mehanizma: 6 elementa u mehanizmu zaključavanja / 6 aktivnih klinova na opruzi
- 46.000 kombinacija
- vlasnička kartica
- 5 ključeva
- otporan na provalničke tehnike: potiskivanje klinova / češljanje / bušenje - zaštita od bušenja tijela / bumping
- izrada ključeva u tvornici te kod velikog broja servisnih centara
- šifra sirovog ključa: i6 K56 MSNI

SLO

- elementi varnostnega mehanizma: 10 elementov v zaklepnem mehanizmu / 5 aktivnih klinov / 5 zgornjih kontrolnih klinov
- 100.000 kombinacij
- lastniška kartica
- ključ* v 7 barvah (črna, modra, rdeča, zelena, roza, rumena, oranžna)
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / vrtnanje oklepa in jedra / bumping
- primeren za protivlomna vrata: dolg vrat ključa
- izdelava ključev: pri proizvajalcu in pri večini servisnih centrov
- opcija: specialna funkcija ASC (Anti-Snap Cylinder)
- koda surovega ključa: K55 K5 MSNI + "barva"

* standardno število ključev pri cilindru: Hrvaška - 5, Slovenija - 4 ali po naročilu

EN

- security elements in mechanism: 10 elements in locking mechanism/ 5 tumbler pins / 5 upper control pins
- 100.000 locking combinations
- owner's cards
- keys available in 7 colours (black, blue, red, green, rose, yellow, orange)*
- resistant on breaking techniques: pins pushing / picking / body drilling / bumping
- suitable for armoured doors - long key neck
- key cutting in factory and most key cutting services
- option: special function ASC (Anti-Snap Cylinder)
- blank key code: K55 K5 MSNI + "colour"

* standard number of keys in set with cylinder: Croatia - 5, Slovenia - 4 or acc. to order


- varnostni elementi mehanizma: 10 elementov v zaklepnem mehanizmu / 5 aktivnih klinov / 5 vertikalnih kontrolnih klinov
- 100.000 kombinacij
- 4 ključ iz novega srebra
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / vrtnanje oklepa / bumping
- izdelave ključev v tovarni in v večini servisnih centrov
- koda surovega ključa: K5 MSNI

- security elements in mechanism: 10 elements in locking mechanism / 5 tumbler pins / 5 upper control pins
- 100.000 locking combinations
- 4 keys
- resistant on breaking techniques: pins pushing / picking / body drilling / bumping
- key cutting in factory and most key cutting services
- blank key code: K5 MSNI

- varnostni elementi mehanizma: 6 elementov v zaklepnem mehanizmu / 6 aktivnih klinov
- 46.000 kombinacij
- lastniška kartica
- 5 ključev
- odporen na vlomilske tehnike: potiskanje klinov / tipanje / vrtnanje oklepa / bumping
- izdelave ključev v tovarni in v večini servisnih centrov
- koda surovega ključa: i6 K56 MSNI

- security elements in mechanism: 6 elements in locking mechanism/ 6 tumbler pins
- 46.000 locking combinations
- owner's cards
- 3 or 5 keys
- resistant on breaking techniques: pins pushing / picking / body drilling / bumping
- key cutting in factory and most key cutting services
- blank key code: i6 K56 MSNI

TITAN K1



- 3 ključa
- 10.000 kombinacija zaključavanja
- 5 klinova
- niklano tijelo
- zaštita protiv bušenja
- antibump klinovi
- šifra sirovog ključa: K58 NT A profil
- po narudžbi za veće količine moguća funkcija ASC
- po narudžbi za veće količine moguća funkcija DOMINO

- 3 ključ
- 10.000 kombinacij zaklepanja
- 5 klinov
- oklep nikljan ali medenina
- zaštita proti vrtanju
- anti-bumping klini
- koda surovega ključa: K58 NT A profil
- za veće količine mogućnost funkcije ASC (po naročilu)
- za veće količine je mogućnost funkcije DOMINO (po naročilu)

- 3 keys
- 10.000 locking combinations
- 5 tumbler pins
- housing finish in nickel
- resistant on body drilling
- antibumping pins
- blank key code: K58 NT A profil
- for bigger orders option: function ASC
- for bigger orders option: function DOMINO

TITAN K



- 3 ključa
- 10.000 kombinacija zaključavanja
- 5 klinova
- tijelo niklano ili mesingano
- šifra sirovog ključa: K58 NT A profil

- 3 ključ
- 10.000 kombinacij zaklepanja
- 5 klinov
- oklep nikljan ali medenina
- koda surovega ključa: K58 NT A profil

- 3 keys
- 10.000 locking combinations
- 5 tumbler pins
- housing finish in nickel or messing
- blank key code: K58 NT A profil

TITAN XT



- 3 ključa
- 10.000 kombinacija zaključavanja
- 5 klinova
- niklano tijelo
- šifra sirovog ključa: K59 NT D profil

- 3 ključ
- 10.000 kombinacij zaklepanja
- 5 klinov
- oklep nikljan
- koda surovega ključa: K59 NT D profil

- 3 keys
- 10.000 locking combinations
- 5 tumbler pins
- housing finish in nickel
- blank key code: K59 NT D profil

TITAN K5 PLUS



- 5 ključeva
- 5.000 kombinacija zaključavanja
- 5 klinova
- niklano tijelo
- šifra sirovog ključa: K5+ MSNI

- 3 ali 5 ključev
- 5.000 kombinacij zaklepanja
- 5 klinov
- oklep nikljan
- koda surovega ključa: K5+ MSNI

- 3 or 5 keys
- 5.000 locking combinations
- 5 tumbler pins
- housing finish in nickel
- blank key code: K5+ MSNI

Kako odabrati profilni cilindar i značajke | Kako izbrati profilni cylinder in lastnosti | How to Choose Profile Cylinder

HR

SLO

EN



Sigurnosni cilindri

★★★★★ i VIŠE

Cilindri s 3★ i više su sigurnosni cilindri.

ŠTO SU SIGURNOSNI CILINDRI?

Sigurnosni cilindri su otporni na provalničke metode. Što je viši sigurnosni rang cilindra to je veća razina otpornosti na raznolike provalničke tehnike.

SIGURNOSNI ELEMENTI:

- protiv **agresivne** provalničke metode **lomljenja** i **čupanja** cilindra
Lomljenje i čupanje cilindra su najčešće agresivne metode provaljivanja.
TITAN ASC - kontrolirana zona lomljenja
Nakon lomljena cilindra on je i dalje u funkciji pa se može s original ključem otključati, ali ga je potrebno što prije zamijeniti s novim.
DOM modular - protulomnost i fleksibilnost dimenzija
Šipka od kaljenog čelika duž cilindra onemogućuje lomljenje. Zahvaljujući modulima cilindar se može produživati i smanjivati te tako kod promjena vrata se može zadržati postojeći cilindar.
- protiv **agresivne** provalničke metode **bušenja**
Što je cilindar višeg sigurnosnog ranga to ima više čeličnih kaljenih klinova u tijelu, jezgri, ali i u samom mehanizmu zaključavanja koji sprečavaju bušenje cilindra.
- protiv **inteligentnih** provalničkih metoda
Bez obzira na tehniku provaljivanja (bumping, češljanje ručnim ili električnim alatom) što je viši sigurnosni rang to je mehanizam kompleksniji u više razina te onemogućuje inteligentne tehnike provaljivanja.
Mehanizam zaključavanja s horizontalnim profilom imaju zaključavanje u 2 ili 3 razine te još dodatne elemente tipa blokirajuća letva i međudjelovanje mobilnog elementa u ključu s posebnim dijelom mehanizma u cilindru.
Mehanizmi zaključavanja s vertikalnim profilom radi uskog ulaza onemogućuje ulazak provalničkim alatom, a s dodatnim bočnim elementima dodatno otežava bilo kakvu manipulaciju.

Varnosni cilindri

★★★★★ in VEČ

Cilindri s 3 in več ★ so varnosni cilindri.

KAJ SO VARNOSTNI CILINDRI?

Varnosni cilindri so odporni na vlomilske metode. Višji kot je varnostni razred cilindra, večja je raven odpornosti na različne vlomilske tehnike.

VARNOSTNI ELEMENTI:

- proti **agresivni** vlomilski metodi **lomljenja** in **trganja** cilindra
Lomljenje in trganje cilindra sta najpogostejši agresivni metodi vlamljanja.
TITAN ASC - kontrolirano območje loma
Po zlomu cylinder lahko odklenemo z originalnim ključem, potrebno pa ga je čimprej nadomestiti z novim cilindrom.
DOM modular - protivlomnost in fleksibilnost dimenzij
Kaljena palica vzdolž cilindra onemogoča lomljenje. Zaradi modulov, se lahko cylinder skrajša ali podaljša ter tako pri zamenjavi vrat obdrži obstoječ cilindar.
- proti **agresivne** vlomilske metode **vrtanja**
Čim višji je varnostni razred cilindra, tem več ima kaljenih jeklenih klinov v oklepu, jedru ali v samem zaklepem mehanizmu, kateri preprečujejo vrtanje cilindra.
- proti **naprednim** vlomilskim metodam
Ne glede na tehniko vlamljanja (bumping, ravnanje klinov z ročnim ali električnim orodjem), višji kot je varnostni razred, bolj kompleksnejši in nivojski je mehanizem, kar onemogoča vlamljanje z naprednimi tehnikami.
Zaklepni mehanizem s horizontalnim profilom ima zaklepanje v 2 ali 3 nivojih in še dodatne elemente - zaklepne letve in skladno s premikajočim se elementom v ključu, še posebni mehanizem v cilindru.
Zaklepni mehanizem z vertikalnim profilom z ozkim vhodom (profilom) preprečuje vstop vlomilskem orodju in z dodatnimi stranskimi elementi otežuje vsakršno manipulacijo.

Security Cylinder

★★★★★ and MORE

Cylinders with 3★ and more are security cylinders.

WHAT ARE SECURITY CYLINDERS?

Security cylinders are resistant to breaking techniques. The higher cylinder's security level, the bigger breaking resistance it is.

SECURITY ELEMENTS:

- against **aggressive** breaking technique as **cylinder breaking** and **pulling out cylinder**
Breaking cylinder and plug pulling are most often aggressive breaking technique.
TITAN ASC - Anti-Snap Cylinder
After breaking, cylinder is still in function and it can be unlocked with originally assigned key. It should be replaced in shortest term.
DOM Modularity - against breaking, plug pulling and dimension flexibility
Along cylinder body is hardened steel bar against breaking cylinder. Thanks to modules cylinder dimension could be easily adapted to door.
- against **aggressive** breaking technique as **drilling**
The higher security rang cylinder has more steel inserts and hardened pins in the body and plug. Also, inside the locking mechanism, there are steel elements that prevent cylinder drilling.
- against **intelligent** breaking techniques
Doesn't matter which breaking techniques is used (bumping, picking by hand tools or electro pick) the higher security rang cylinder has the more complicate locking mechanism on more levels is which prevents intelligent breaking techniques.
Locking mechanism with horizontal profile has 2 or 3 levels and additional elements such as blocking bar and pin that corresponds with 45° floating bearing roller.
Locking mechanism with vertical profile with narrow key channel prevents entering with breaking tools and with additional side elements makes more difficult any kind of manipulation.

HR

★★★★★ i VIŠE

Cilindar TITAN i6 i cilindri s 4 ★ i više imaju 6 klinova u osnovnom dijelu mehanizma zaključavanja što daje veći broj kombinacija zaključavanja. DOM cilindri koriste poseban patent profila ključa „visoko-nisko“ što daje više kombinacija zaključavanja od klasičnog profila.

★★★★★ i VIŠE

Cilindri s 6 ★ i više imaju visoku otpornost na agresivne i inteligentne provalničke metode.

★★★★★ i VIŠE

Cilindri s 9 ★ i više su iznimno otporni na agresivne i inteligentne provalničke metode.



Patentirani ključevi

★★★★★ i VIŠE

Cilindri s 9 ★ i više imaju patentirane ključeve. Specijalne ključeve najviše razine sigurnosti izrade ključeva može izrađivati samo tvornica DOM.

★★★★★ i VIŠE

Patentirane ključeve za cilindre s 5 ★ i više izrađuju ovlašteni partneri-servisi, a pojedine ključeve samo jedan partner-servis koji ima svoj partnerski-servisni profil.

ŠTO JE PATENTIRANI KLJUČ?

Patentirani ključevi daju korisnicima više sigurnosti jer onemogućuju neovlaštenu izradu ključeva. Patent može trajati do određene godine ili neogranično, u slučaju kad je patent po marki proizvođača.

3 razine zaštite od neovlaštenog kopiranja patentiranih ključeva:

1. Napredna tehnologija izrade profila ključeva
TITAN i DOM razvijaju u svojim odjelima za razvoj i istraživanje nove tehnološke prepreke u skladu s trenutno najvišim zahtjevima. Takvi ključevi se mogu izraditi samo sa specijalnim strojevima.
2. Stroga kontrola izrade novih ključeva
Kod patentiranih ključeva ne postoje nobrađeni ključevi u slobodnoj prodaji tako da samo ovlašteni partneri-servisi koji imaju svoj ili trgovački profil mogu izrađivati ključeve uz dokaz vlasništva preko vlasničke/servisne kartice.
3. Pravna zaštita profila ključeva
U skladu s povećanom potrebom TITAN nudi veći broj cilindara i sistema zaključavanja s patentiranim profilom. Svi DOM cilindri i sistemi zaključavanja su s patentiranim profilom.

SLO

★★★★★ in VEČ

Cilinder TITAN i6 i cilindri s 4 ali več ★ imajo 6 klinov v osnovnem zaklepnem mehanizmu, s tem dobimo večjo število zaklepnih kombinacij. DOM cilindri imajo patent posebnega profila ključa: „visoko-nisko“, s tem dobimo več kombinacij kot s klasičnim profilom.

★★★★★ in VEČ

Cilindri s 6 in več ★ imajo visoko odpornost na agresivne in napredne metode vlamljanja.

★★★★★ in VEČ

Cilindri s 9 in več ★ so izjemno odporni na agresivne in napredne metode vlamljanja.

Patentirani ključ

★★★★★ in VEČ

Cilindri s 9 in več ★ imajo patentirane ključve. Specialne ključve najvišjega nivoja varnosti izdelave ključa, lahko izdela samo tovarna DOM.

★★★★★ in VEČ

Patentirane ključve za cilindre s 5 ★ in več izdelujejo pooblašteni partnerji-serviserji, a posamezne ključve samo eden partner-serviser, kateri ima svoj partnersko-servisni profil.

KAJ JE PATENTIRAN KLJUČ?

Patentirani ključ dajo uporabniku več varnosti, ker onemogočajo nepooblaščen izdelavo ključev. Patent lahko traja do določenega leta ali neomejeno, če gre za zaščito znamke proizvajalca.

3 stopnje zaštite pred nepooblaščenim kopiranjem patentiranih ključev:

1. Napredne tehnologije izdelave profilov ključev
TITAN in DOM razvijata v svojih oddelkih za razvoj in raziskave nove tehnološke prepreke v skladu s trenutnimi najvišjimi zahtevami. Takšni ključ se lahko izdelajo samo s posebnimi stroji.
2. Strog nadzor izdelave novih/nadomestnih ključev
V prosti prodaji ni mogoče kupiti patentiranih ključev, takšne ključve imajo samo pooblašteni serviserji, ki imajo svoj ali trgovski profil in lahko izdelajo dodatne ključve, če priložite lastniško kartico kot dokaz lastništva cilindra.
3. Pravna zaščita profila ključa
Glede na potrebo TITAN nudi več cilindrov in sistemov zaklepanja s patentiranimi profili. Vsi DOM cilindri in sistemi zaklepanja so narejeni s patentiranimi profili.

EN

★★★★★ and MORE

TITAN cylinder i6 and others with 4 ★ and more have 6 pin tumblers in the base of locking mechanism which gives more locking combinations. DOM cylinders use special patented key profile "high-deep" what gives more locking combinations comparing classic profile.

★★★★★ and MORE

Cylinders with 6 ★ and more have high resistance on aggressive and intelligent breaking techniques.

★★★★★ and MORE

Cylinders with 9 ★ and more are extremely resistant on aggressive and intelligent breaking techniques.

Patented Keys

★★★★★ and MORE

Cylinders with 9 ★ and more have patented keys. Special keys of highest security level can be made only in factory DOM.

★★★★★ and MORE

Patented keys for cylinders with 5 ★ and more can be made in authorised partners-services and some profiles can be made by only one partner-service because he has own partner-service profile.

WHAT IS PATENTED KEYS?

Patented keys give to user more security because they restrict unauthorised key cutting. Patent could last till specific year or unlimited in the case of producer brand patented keys.

3 levels of protection from unauthorised key cutting of patented keys:

1. Advance production technology of key profiles
TITAN and DOM develop in their R & D departments new technological obstacles in acc. to highest demands. Such keys can be made only with special key cutting machines and tools.
2. Strict control of key cutting
With patented keys there are no blank keys available on market. Only authorised partner services which has own profile or factory profile for partners can cut keys only with owner's/ service cards.
3. Legal protection of key profile
In accordance with higher demand TITAN offers bigger number of cylinders and locking systems with patented profile. All DOM cylinders and locking systems are with patented profile.



HR

SLO

EN



Mobilni disk

DOM ix Saturn, DOM ix 6 SR te **DOM ix Gamma** imaju poseban mobilni disk, odnosno kuglicu u profilu ključa što daje iznimno visoku zaštitu od neovlaštene izrade ključa.

Premikajoč disk

DOM ix Saturn, DOM ix 6 SR in **DOM ix Gamma** imajo poseben premikajoč/gibljiv disk oziroma kroglico v profilu ključa, kar zagotavlja izjemno visoko zaščito pred nepooblaščenim izdelavo ključa.

Floating Bearing Roller

DOM ix Saturn, DOM ix 6 SR and **DOM ix Gamma** have special floating bearing roller or ball bearing inside key profile which gives extremely high protection against unauthorised key cutting.



Vlasnička / Servisna kartica

★★★★★ I VIŠE

Cilindri s 5 ★+ i više imaju vlasničku/servisnu karticu **za patentirane cilindre**.

★★★ I VIŠE

Cilindar TITAN i6 i cilindri s 3 ★+ i više imaju vlasničku/servisnu karticu **za nepatentirane cilindre**.

ŠTO JE VLASNIČKA/SERVISNA KARTICA?

Kartica olakšava servisiranje cilindara i sistema zaključavanja, izradu novih ključeva i cilindara.

3 su tipa kartice:

1. Vlasnička/servisna kartica za patentirane cilindre
TITAN i DOM uz svaki patentirani cilindar i sisteme zaključavanja obavezno isporučuju i karticu s jedinstvenim brojem. Bez kartice nije moguće dobiti novi ključ ili cilindar.
2. Vlasnička/servisna kartica za nepatentirane cilindre
TITAN proizvodi sigurnosne i standardne cilindre i sisteme zaključavanja i bez patenta, ali radi jednostavnijeg servisa isporučuju i karticu s jedinstvenim brojem. TITAN preporučuje da se izrada novih ključeva i cilindara radi isključivo kod ovlaštenih servisa i partnera.
3. Kartica bez funkcije
Pojedini proizvođači stavljaju uz cilindre niže kvalitete ukrasne kartice bez funkcije.

Lastniška / Servisna kartica

★★★★★ in VEČ

Cilindri s 5 ★+ in več imajo lastniško/servisno kartico **za patentirane cilindre**.

★★★ I VIŠE in VEČ

Cilindar TITAN i6 i cilindri s 3 ★+ in več imajo lastniško/servisno kartico **za nepatentirane cilindre**.

KAJ JE LASNIŠKA/SERVISNA KARTICA?

Kartica omogoča lažje servisiranje cilindra in zaklepne sistema, izdelavo novih ključev in cilindrov.

3 tipe kartic:

1. Lastniška/servisna kartica za patentirane cilindre
TITAN in DOM vsak patentirani cilindar in zaklepni sistem vedno dobavita s kartico z unikatno kodo. Brez kartice ni mogoče dobiti nov ključ ali cilindar.
2. Lastniška/servisna kartica za nepatentirane cilindre
TITAN izdeluje varnostne in standardne cilindre in sisteme zaklepanja tudi brez patenta, ampak zaradi lažjega servisa dodaja tudi kartico z unikatno kodo. TITAN priporoča, da se izdelava novih ključev in cilindrov izvaja izključno pri pooblaščenih serviserjih.
3. Kartica brez funkcije
Nekateri proizvajalci dodajajo cilindrom niže kvalitete kartice brez funkcije.

Owner's / Service Card

★★★★★ and MORE

Cylinders with 5 ★+ and more have owner's / service card **for patented cylinders**.

★★★ I VIŠE and MORE

TITAN cylinder i6 and others with 3 ★+ and more have owner's / service card **for non-patented cylinders**.

WHAT IS OWNER'S / SERVICE CARD?

Card makes easy servicing cylinders and locking systems, key cutting and cylinder making.

They are 3 types of cards:

1. Owner's / Service card for patented cylinders
TITAN and DOM with every patented cylinder and locking system deliver card with unique number. Without card there is no possibility to get new key or cylinder.
2. Owner's / Service card for non-patented cylinders
TITAN produces security and standard cylinders and locking systems also without patent protection but for better service always with card with unique number. TITAN recommends new keys and cylinder to be ordered only in authorised TITAN partner services.
3. Owner's / Service card without function
Some lower quality cylinder producers deliver card as pure decoration without function.

	Sigurnosni cilindar Varnostni cilindar Security cylinder			Jamstvo [god.] Garancija [let] Warranty [years]	Vlasnička kartica Lastniška kartica Owner's card	Ključ od novog srebra Ključ iz novega srebra Nickel silver key	
	Najviša razina Najviša stopnja Highest level	Visoka razina Visoka stopnja High level	Srednja razina Srednja stopnja Medium level				
★★★★★★★★★+	✓			5	✓	✓	
★★★★★★★★★+	✓			5	✓	✓	
★★★★★★★★★		✓		5	✓	✓	
★★★★★★★		✓		5	✓	✓	
★★★★★★+		✓		5	✓	✓	
★★★★★★		✓		5	✓	✓	
★★★★★+		✓		5	✓	✓	
★★★★★			✓	5	✓	✓	
★★★★			✓	5	✓		
★★★+			✓	5	✓		
★★★			✓	3			
★★★			✓	3	✓		
★★+							
★★							
★+							
★							

HR

SLO

EN



Ključevi od „novog srebra“

★★★★★★★★★ i VIŠE

Cilindri s 5 ★ i više imaju specijalne ključeve od legure novo srebro.

ZAKAJ SU KLJUČEVI OD NOVOG SREBRA NAJBOLJI?

Ključevi izrađeni od legure novog srebra (bakar, nikal, cink itd.) svojim trošenjem oslobađaju finu prašinu kojom podmazuju mehanizam cilindra i time produžuju radni vijek cilindra do 7 puta. Zahvaljujući većoj žilavosti otporniji su na pucanje od tvrdih i mekših materijala.

Ključ iz „novega srebra“

★★★★★★★★★ in VEČ

Cilindri s 5 ★ in več imajo ključve iz posebne zlitine „novo srebro“

ZAKAJ SO KLJUČI IZ NOVEGA SREBRA NAJBOLJŠI?

Ključ izdelan iz zlitine novega srebra (bakar, cink, nikelj) pri uporabi pušča fin prah, kateri maže mehanizem cilindra in s tem podaljša življenjsko dobo cilindra do 7-krat. Zaradi večje žilavosti materiala je ključ odpornjši, kot ključ iz trdega ali mehkega materiala.

Nickel Silver Keys

★★★★★★★★★ and MORE

Cylinders with 5 ★ and more have keys made from special alloy nickel silver.

WHY NICKEL SILVER KEYS ARE THE BEST?

Keys made from alloy nickel silver (copper, nickel, zinc etc.) with usage frees fine dust which lubricates locking mechanism and with that extend working time of cylinder up to 7 times. Thanks to toughness of material nickel silver is more resistant for breaking than harder and softer materials.

Otpornost na agresivne i inteligentne provalničke metode Odpornost na agresivne in napreden vlomilске metode Aggressive and intelligent breaking techniques resistance		Patentirani ključ Patentirani ključ Patented key		
Iznimna Izredna Extreme	Visoka Visoka High	TITAN i DOM tvornica Tovarna TITAN in DOM TITAN and DOM factory	Ovlašteni partneri-servisi Pooblašćeni partnerji-servisi Authorised partner service	
✓				DOM diamant
✓		✓		DOM ix Saturn
	✓	✓	✓	TITAN T250
	✓	✓	✓	DOM ix 6 SR
	✓	✓	✓	TITAN T200
	✓	✓	✓	DOM ix DAS
	✓	✓	✓	TITAN T100RX
				TITAN K66
				TITAN K56
				TITAN K55
				TITAN K5
				TITAN i6
				TITAN K1
				TITAN K
				TITAN XT
				TITAN K5 PLUS


Dimenzije cilindara | Dimenzije cilindrov | Cylinder Dimensions

TABLICA / TABELA / TABLE 1

L [mm]	AxB [mm]	TITAN								DOM			
		K5+	XT	K (Ni, MS)	K1	K1 Bad	i6 (str.36)	K5	K55	ix DAS	ix 6 SR	ix Saturn	ENIQ
44	22 x 22				✓	✓							
54	27 x 27			✓	✓	✓							
57	27 x 30				✓	✓							
59	27 x 32				✓	✓							
62	27 x 35				✓	✓				✓	✓		
60	30 x 30	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
67	27 x 40				✓	✓				✓	✓		
65	30 x 35	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
70	30 x 40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
70	35 x 35	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
75	30 x 45	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
75	35 x 40		✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
80	30 x 50	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
80	35 x 45	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
80	40 x 40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
85	30 x 55	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓
85	35 x 50	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓
85	40 x 45	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
90	30 x 60	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
90	35 x 55	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓
90	40 x 50	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
90	45 x 45	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
95	30 x 65	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓
95	35 x 60				✓	✓	✓	✓	✓	✓	✓	✓	✓
95	40 x 55	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
95	45 x 50	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
100	30 x 70	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓
100	35 x 65				✓	✓	✓	✓	✓	✓	✓	✓	✓
100	40 x 60	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
100	45 x 55	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
100	50 x 50	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
40	10 x 30				✓			✓	✓	✓	✓	✓	✓
45	10 x 35				✓			✓	✓	✓	✓	✓	✓
50	10 x 40				✓			✓	✓	✓	✓	✓	✓
55	10 x 45				✓			✓	✓	✓	✓	✓	✓
60	10 x 50				✓			✓	✓	✓	✓	✓	✓
65	10 x 55									✓	✓	✓	✓
70	10 x 60									✓	✓	✓	✓
75	10 x 65									✓	✓	✓	✓
80	10 x 70									✓	✓	✓	✓
85	10 x 75									✓	✓	✓	✓
90	10 x 80									✓	✓	✓	✓

CILINDRI DVOJNI PROFILNI CILINDRI CYLINDERS

POLUCILINDRI ENOJNI PROFILNI
CILINDRI HALF CYLINDERS

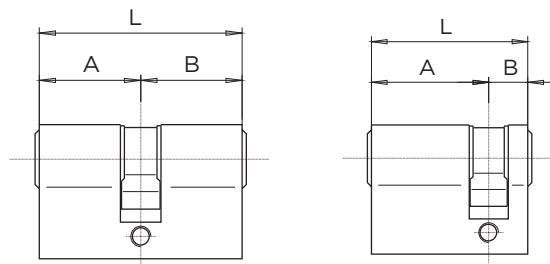

TABLICA / TABELA / TABLE 2

L [mm]	AxB [mm]	TITAN				
		K56	K66	T100 RX	T200	T250
63	31,5 x 31,5	✓	✓	✓	✓	✓
68	31,5 x 36,5	✓	✓	✓	✓	✓
73	31,5 x 41,5	✓	✓	✓	✓	✓
73	36,5 x 36,5	✓	✓	✓	✓	✓
78	31,5 x 46,5	✓	✓	✓	✓	✓
78	36,5 x 41,5	✓	✓	✓	✓	✓
83	31,5 x 51,5	✓	✓	✓	✓	✓
83	36,5 x 46,5	✓	✓	✓	✓	✓
83	41,5 x 41,5	✓	✓	✓	✓	✓
88	31,5 x 56,5	✓	✓	✓	✓	✓
88	36,5 x 51,5	✓	✓	✓	✓	✓
88	41,5 x 46,5	✓	✓	✓	✓	✓
93	31,5 x 61,5	✓	✓	✓	✓	✓
93	36,5 x 56,5	✓	✓	✓	✓	✓
93	41,5 x 51,5	✓	✓	✓	✓	✓
93	46,5 x 46,5	✓	✓	✓	✓	✓
98	31,5 x 66,5	✓	✓	✓	✓	✓
98	36,5 x 61,5	✓	✓	✓	✓	✓
98	41,5 x 56,5	✓	✓	✓	✓	✓
98	46,5 x 51,5	✓	✓	✓	✓	✓
103	31,5 x 71,5	✓	✓	✓	✓	✓
103	36,5 x 66,5	✓	✓	✓	✓	✓
103	41,5 x 61,5	✓	✓	✓	✓	✓
103	46,5 x 56,5	✓	✓	✓	✓	✓
103	51,5 x 51,5	✓	✓	✓	✓	✓
41,5	10 x 31,5	✓	✓	✓	✓	✓
46,5	10 x 36,5	✓	✓	✓	✓	✓
51,5	10 x 41,5	✓	✓	✓	✓	✓
56,5	10 x 46,5	✓	✓	✓	✓	✓
61,5	10 x 51,5	✓	✓	✓	✓	✓
66,5	10 x 56,5					
71,5	10 x 61,5					
76,5	10 x 66,5					
81,5	10 x 71,5					
86,5	10 x 76,5					
91,5	10 x 81,5					

TABLICA / TABELA / TABLE 3

L [mm]	AxB [mm]	DOM diamant
64	32 x 32	✓
69	32 x 37	✓
74	32 x 42	✓
74	37 x 37	✓
79	32 x 47	✓
79	37 x 42	✓
84	32 x 52	✓
84	37 x 47	✓
84	42 x 42	✓
89	32 x 57	✓
89	37 x 52	✓
89	42 x 47	✓
94	32 x 62	✓
94	37 x 57	✓
94	42 x 52	✓
94	47 x 47	✓
99	32 x 67	✓
99	37 x 62	✓
99	42 x 57	✓
99	47 x 52	✓
104	32 x 72	✓
104	37 x 67	✓
104	42 x 62	✓
104	47 x 57	✓
104	52 x 52	✓
42	10 x 32	✓
47	10 x 37	✓
52	10 x 42	✓
57	10 x 47	✓
62	10 x 52	✓
67	10 x 57	✓
72	10 x 62	✓
77	10 x 67	✓
82	10 x 72	✓
87	10 x 77	✓
92	10 x 82	✓

CILINDRI DVOJNI PROFILNI CILINDRI CYLINDERS

 POLICILINDRI ENOJNI PROFILNI
CILINDRI HALF CYLINDERS

HR

SLO

EN

! Dimenzije u tablici su standardne i većinom raspoložive na skladištu.

Za pojedine modele cilindara na skladištu nisu prisutne sve dimenzije ili se ne proizvode, ali za dovoljne količine moguće ih je proizvesti/ isporučiti.

! Cilindar TITAN i6 odstupa od standardnih dimenzija i dolazi u ovim dimenzijama:

- 63 - 31,5 x 31,5
- 66,5 - 31,5 x 35
- 71,5 - 31,5 x 40
- 76,5 - 31,5 x 45
- 81,5 - 31,5 x 50
- 86,5 - 31,5 x 55
- 91,5 - 31,5 x 60
- 96,5 - 31,5 x 65
- 101,5 - 31,5 x 70

TITAN: Cilindri TITAN se proizvode do 280/283 mm ukupne dužine, a naručuju se po narudžbi za veće od 100/103 mm.

Modeli K, K Ni, K1, i6, K5, K55, K56, K66, T100RX, T200, T250 mogu imati Titan prsten (JUS) 7,5 mm ili DIN 9,5 mm.

Samo modeli XT imaju isključivo prsten DIN 9,5. Kod modela K5+ dimenzije 30x30 i 30x35 prsten je isključivo 7,5 mm dok su druge dimenzije samo DIN prsten 9,5 mm.

DOM: Cilindri DOM se proizvode do 200/204 mm i dimenzije van tablica se mogu isporučiti u kraćem roku u modularnoj verziji, a do 100 mm se može naći i standardna izvedba (DOM diamant je modular uvijek).

TABLICA 1:

TITAN: Cilindri kojima je A ili B strana veća od 70 mm naručuju se posebno iz tvornice TITAN i radi se modularna izvedba s maksimalnom dužinom od 140 mm za obje strane od centra rupe za vijak! Produžeci su po 5 mm.

DOM: Cilindri kojima je A ili B strana ukupne dužina veća od 125 mm izrađuju se samo u modularnoj izvedbi s maksimalnom dužinom od ukupno 200 mm! Produžeci su po 5 mm.

TABLICA 2:

TITAN: Cilindri kojima je A ili B strana veća od 71,5 mm naručuju se posebno iz tvornice TITAN i radi se modularna izvedba s maksimalnom dužinom od 141,5 mm za obje strane od centra rupe za vijak! Produženje ide svakih 5 mm.

TABLICA 3:

DOM diamant: Molimo pazite kod narudžbe jer se vanjska strana cilindra izrađuje od čelika, a unutarnja od Duracasta!

Dostupne su i dimenzije veće od 104 mm, a za dimenzije veće od 70 x 70 mm moguće je produženje cilindra svakih 10 mm. Svi cilindri DOM diamant su u specijalnoj modularnoj izvedbi.

! Dimenzije v tabeli so standardne in večino-ma na voljo zalogi.

Za nekatere tipe cilindrov v skladišču ni vseh dimenzij ali se jih ne proizvaja; za večje količine je moža izdelava/dobava.

! Cilinder TITAN i6 odstupa od standardnih dimenzij in je na voljo v sledečih dimenzijah:

- 63 - 31,5 x 31,5
- 66,5 - 31,5 x 35
- 71,5 - 31,5 x 40
- 76,5 - 31,5 x 45
- 81,5 - 31,5 x 50
- 86,5 - 31,5 x 55
- 91,5 - 31,5 x 60
- 96,5 - 31,5 x 65
- 101,5 - 31,5 x 70

TITAN: Cilindri TITAN se izdelujejo do 280/283mm skupne dolžine, po naročilo pa od dolžine večje od 100/103mm.

Modeli K, K Ni, K1, i6, K5, K55, K56, K66, T100RX, T200, T250 lahko imajo Titan prstan (JUS) 7,5 mm ali DIN 9,5 mm.

Samo model XT ima izključno prstan DIN 9,5. Pri modelu K5+ dimenzije 30x30 in 30x35 je prstan izključno 7,5 mm, pri ostalih dimenzijah pa smo DIN prstan 9,5 mm.

DOM: DOM cilindri se izdelujejo do 200/204 mm; dimenzije izven tabele so dobavljive v krajšem roku v modularni izvedbi; do 100 mm je možna tudi standardna različica (DOM diamant je vedno modularna izvedba).

TABELA 1:

TITAN: Cilindri pri katerih je stran A ali B daljša od 70 mm, se naročajo v tovarni TITAN v modularni izvedbi; najdaljša dolžina strani je 140 mm, merjeno od sredine navoja za pritrdjevanje! Korak dolžine je 5 mm.

DOM: Cilindri, pri katerih je skupna dolžina strani A in B večja od 125 mm, se izdelujejo samo v modularni izvedbi z največjo skupno dolžino 200 mm! Korak dolžine je 5 mm.

TABELA 2:

TITAN: Cilindri pri katerih je stran A ali B daljša od 71,5 mm, se naročajo v tovarni TITAN v modularni izvedbi; najdaljša dolžina strani je 143 mm, merjeno od sredine navoja za pritrdjevanje! Korak dolžine je 5 mm.

TABELA 3:

DOM diamant: Prosimo bodite pozorni pri naročilu, ker se zunanja stran cilindra izdeluje iz jekla, notranja pa iz Duracasta!

Dobavljive so tudi daljše dimenzije od 104 mm, vendar je pri dimenzijah daljših od 70x70 mmogoč korak po 10 mm. Vsi cilindri DOM diamant so v posebni modularni izvedbi.

! Dimensions in table are standard and mostly available on stock.

For some cylinder models not all dimensions are available on stock or they are not producing but for enough big order it could be produced/ delivered.

! Cilindar TITAN i6 deviates from standard dimensions and is produced in these dimensions:

- 63 - 31,5 x 31,5
- 66,5 - 31,5 x 35
- 71,5 - 31,5 x 40
- 76,5 - 31,5 x 45
- 81,5 - 31,5 x 50
- 86,5 - 31,5 x 55
- 91,5 - 31,5 x 60
- 96,5 - 31,5 x 65
- 101,5 - 31,5 x 70

TITAN: Cylinders TITAN are produced till 280/283 mm of total length and all cylinders bigger than 100/103 mm are delivered by special order.

Cylinder models K, K Ni, K1, i6, K5, K55, K56, K66, T100RX, T200, T250 can have TITAN cam (JUS) 7,5 mm or DIN 9,5 mm.

Model XT have only cam DIN 9,5 mm. Model K5 plus for dimension 30x30 and 30x35 have cam only 7,5 mm and other dimensions have cam DIN 9,5 mm.

DOM: Cylinders DOM are produced till 200/204 mm and dimensions outside the table can be delivered in shorter term in option modularity and till 100 mm it can be delivered standard option (DOM diamant is always modular).

TABLE 1:

TITAN: Cylinders which have A or B side is bigger than 70 mm are ordered specially from factory TITAN and in that case it is delivered modular option with maximal length 140 mm for both sides from centre of screw hole. Extensions are every 5 mm.

DOM: Cylinder which have A or B side in total longer than 125 mm are made only in option modularity with maximal length of 200 mm! Extensions are every 5 mm.

TABLE 2:

TITAN: Cylinders which A or B side is bigger than 71 mm are ordered specially from factory TITAN and in that case it is delivered modular option with maximal length 141,5 mm for both sides from centre of screw hole. Extensions are every 5 mm.

TABLE 3:

DOM diamant: Please, be careful when ordering while outside side is made from steel, and inside from Duracast!

Available dimensions bigger than 104 mm but for dimensions bigger than 70 x 70 mm it can be ordered only with extensions every 10 mm. All cylinder DOM diamant have as standard option modularity.

Završne obrade | Površinska obdelava | Finishes



MS MESING
MEDENINA
BRASS



NI NIKAL
NIKLIJANO
NICKEL



MNI MAT NIKAL
MAT NIKLIJANO
MATT NICKEL



Obrada MAT NIKAL se dodatno naplačuje ukoliko to nije standardna obrada za pojedni model.
Obdelava MAT NIKLIJANO se doplača, če to ni standardna obdelava za posamezni model.
Finish MN - matt nickel is surcharged if is not standard finish for cylinder model.



01 MAT NIKAL
MAT NIKLIJANO
MATT NICKEL - PLATED



03 KROM BRUŠENI
KROM BRUŠENI
MATT CHROME



04 KROM POLIRANI
KROM POLIRANI
POLISHED CHROME



05 MESING ČEŠLJANI
KRTAČENA MEDENINA
SATIN BRASS



06 MESING POLIRANI
POLIRANA MEDENINA
POLISHED BRASS



07 BRONCA TAMNA
TEMNA BRONZA
DARK BRONZE




09 BRONCA ANTIK
ANTI-K BRONZA
ANTIQUE BRONZE



25 POZLAČENO
POZLAČENO
GOLD PLATED

Obrada 01 dolazi kao standardna, a ostale se nadoplaćuju. Minimalna količina za druge obrade 21 kom.
Obdelava 01 je standardna, ostale so doplačljive. Minimalna količina za druge obdelave je 21 kosov.
Finish 01 - matt nickel is standard finish and others are surcharged. Minimal order quantity for other finish is 21 pcs.

Kako odrediti dužinu i izvedbu cilindra | Kako izbrati dolžino in izvedbo cilindra | How to Choose and Measure Cylinder

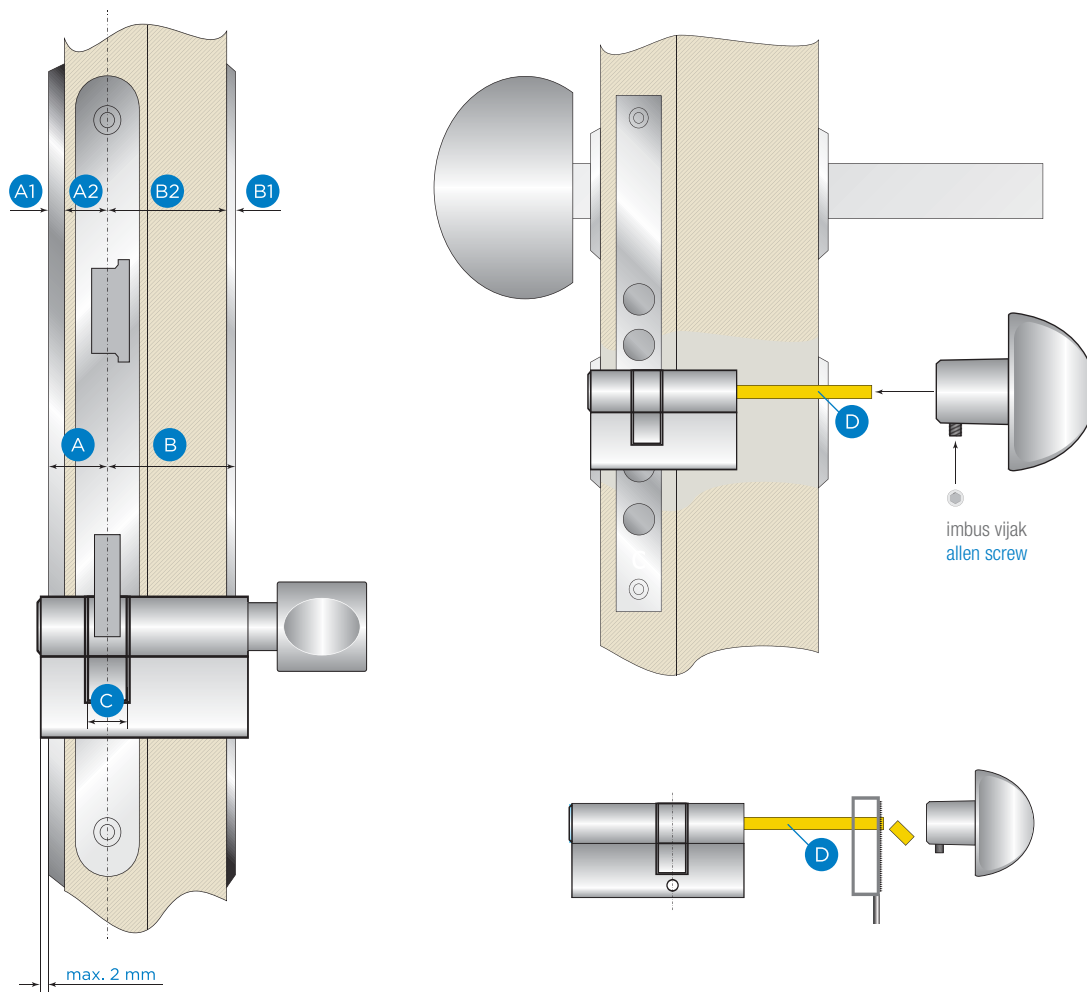

HR

SLO

EN

1. DIMENZIJA CILINDRA (A x B)

Prije kupnje profilnog cilindra izmjerite debljinu svog sigurnosnog štita: **A1** i **B1**. Vrijednostima **A1** i **B1** dodajte dimenzije **A2** i **B2** ($A=A1+A2$, $B=B1+B2$).

A1	B1
A2	B2
A1+A2	B1+B2

2. DIMENZIJA PRSTENA (C)

Prsten može biti DIN 9,5 mm ili JUS 7,5 mm.

1. DIMENZIJA CILINDRA (A x B)

Pred nakupom profilnega cilindra izmerite debelino varnostnega štita: **A1** in **B1**. Vrednostima **A1** in **B1** prištejte dimenziji **A2** in **B2** ($A=A1+A2$, $B=B1+B2$).

A1	B1
A2	B2
A1+A2	B1+B2

2. DIMENZIJA PRSTANA (C)

Prstan je lahko DIN 9,5 mm ali JUS 7,5 mm.

1. CYLINDER DIMESION (A x B)

Before buying a cylinder, please, measure security shield or escutcheon thickness: **A1** and **B1**. To those values add value **A2** and **B2** ($A=A1+A2$, $B=B1+B2$).

A1	B1
A2	B2
A1+A2	B1+B2

2. CAM DIMENSION (C)

Cam can be DIN 9,5 mm or JUS 7,5 mm.

HR

SLO

EN

3. GUMB S UNUTARNJE STRANE?

Da ili ne.

4. PRODUŽETAK ZA GUMB (D)?

Specijalna jezgra za protuprovalna vrata D.

5. STANDARDNA SKLOPKA?



Ako je u cilindru ključ s unutarnje strane, s vanjske ne možemo otključati.

6. SKLOPKA OBOSTRANOG OTKLJUČAVANJA



Ako je u cilindru ključ s unutarnje strane, s vanjske možemo otključati.

Titan - N+G

DOM - T funkcija

7. SPECIJALNA FUNKCIJA ASC - KONTROLIRANA ZONA LOMLJENJA



Cilindar u slučaju lomljenja puca na prvih 5 mm te sprječava lomljenje kod rupe za vijak. I dalje se može otvoriti originalnim ključem.

Dostupni modeli: T250, T200, K55 i K1.

8. SPECIJALNA FUNKCIJA MODULAR



Ojačava cilindar protiv lomljenja i daje fleksibilnost promjene dimenzije cilindra.

Dostupno kod svih DOM cilindara.

9. SPECIJALNA FUNKCIJA DOMINO



Uz cilindar se isporučuju dva različita seta ključeva. Ukoliko se izgubi ključ ili iz nekog drugog razloga želi promijeniti kombinacija za ključavanje, uzima se ključ iz drugog seta i trajno poništava prva kombinacija zaključavanja.

Dostupni modeli: K1, K5, K55, K56, K66, T200.

10. SPECIJALNA FUNKCIJA 2 U 1



Uz cilindar se isporučuju dva različita seta ključeva. Ukoliko se izgubi ključ ili iz nekog drugog razloga želi promijeniti kombinacija za ključavanje, uzima se ključ iz drugog seta i trajno poništava prva kombinacija zaključavanja.

Dostupno kod modela DOM ix Saturn.

3. GUMB NA NOTRANJI STRANI?

Da ali ne.

4. PODALJŠEK ZA GUMB (D)?

Posebno jedro za protivlomna vrata D.

5. STANDARDNA SKLOPKA?



Če je ključ v cilindru na notranji strani, iz zunanje strani ni mogoče odklepanje.

6. SKLOPKA OBOJESTRANSKEGA ODKLEPANJA



Če je ključ v cilindru na notranji strani, lahko odklenemo iz zunanje strani.

Titan - N+G

DOM - T funkcija

7. SPECIJALNA FUNKCIJA ASC- OBMOČJE KONTROLIRANEGA LOMA



Cilinder se v primeru lomljenja zlomi na prvih 5mm in tako onemogoči zlom pri pritrdilnem navoju/vijaku. Z originalnim ključem je možno okleniti cilindar.

Razpoložljivo v modelih: T250, T200, K55 in K1.

8. SPECIJALNA MODULAR FUNKCIJA



Ojačan cilindar proti lomljenju in možna sprememba dimenzije cilindra.

Pri vseh DOM cilindrih.

9. POSEBNA FUNKCIJA DOMINO



Poleg cilindra se dobavita še dva seta ključev. V kolikor se izgubi ključ ali se iz katerega koli drugega razloga želi spremeniti kombinacijo zaklepanja, se vzame ključ iz drugega seta in trajno spremeni kombinacijo zaklepanja.

Razpoložljivo v modelih: K1, K5, K55, K56, K66, T200.

10. SPECIJALNA FUNKCIJA 2 V 1



Poleg cilindra se dobavita še dva seta ključev. V kolikor se izgubi ključ ali se iz katerega koli drugega razloga želi spremeniti kombinacijo zaklepanja, se vzame ključ iz drugega seta in trajno spremeni kombinacijo zaklepanja.

Razpoložljivo v modelu DOM ix Saturn.

3. KNOB FROM INNER SIDE?

Yes or no.

4. SPECIAL KNOB EXTENSION (D)?

Special knob extension for armoured door D.

5. STANDARD COUPLING?



When the key is insert in inner side of cylinder from outside it cannot be open.

6. LOCKING FROM BOTH SIDES



When the key is insert in inner side of cylinder from outside it can be open.

Titan - N+G

DOM - T function

7. SPECIAL FUNCTION ASC – ANTI-SNAP CYLINDER



In case of cylinder breaking only first 5 mm is broken. This function prevents from breaking in the zone of cylinder screw hole. When this cylinder is broken it still can be open with originally assigned key.

Available models: T250, T200, K55 and K1.

8. SPECIAL FUNCTION MODULARITY



It gives resistance against breaking and flexibility in dimension change.

Available: for all DOM models.

9. SPECIAL FUNCTION DOMINO



With cylinder is delivered 2 set of keys, keyed to differ. If any of keys from 1st set is lost or from any other reason user can change locking combination. User takes key from 2nd set and turns the key what results in recoding on 2nd set of keys and 1st set is permanently erased.

Available models: K1, K5, K55, K56, K66, T200.

10. SPECIAL FUNCTION 2 IN 1



2 different set of keys are delivered. If any keys are lost, user can change locking combination by turning any key from 2nd set in cylinder which makes 2nd set valid. Keys from the 1st set become unusable.

Available model: DOM ix Saturn.

Legenda ikona | Pomen ikon | Icon Legend



	dupli cilindar koji se otključava samo s jedne strane (standard)	dvojni cilindar z odklepanjem samo iz ene strani (standard)	double cylinder could be locked from one side at the time (standard)
	dupli cilindar koji se otključava s obje strane čak i kada je ključ s druge strane (N+G funkcija)	dvojni cilindar z odklepanjem iz obeh strani tudi ko je ključ vstavljen na drugi strani (N+G funkcija)	double cylinder could be locked from both sides even when keys is on other side (N + G function)
	Anti-AMOK - otključavanje cilindra gdje ključ i i gumb rade neovisno	Anti-AMOK- odklepanje cilindra, kjer je ključ neodvisen od gumba	Anti – AMOK – unlocking of double knob cylinder where key side and knob side work independently
	slobodan hod prstena 360° (antipanic sustavi, motorizirane brave i sl.)	prosto vrteč prstan 360° (anti-panic sistemi, ključavnice z elektromotorjem, ipd.)	free cam turn of 360° (antipanic systems, motorised locks etc.)
	možnost izrade master ključa/sistema zaključavanja	možnost izdelave glavnega ključa/zaklepne-ga sistema	possibility of making master key / locking system
	površinska zaščita cilindra (mat nikel, nikel, mesing)	površinska zaščita cilindra (mat nikelj, nikelj, medenina)	cylinder finish (matt nickel, nickel, brass)
	možne različite izvedbe cilindra (lokot, polucilindar, brave...))	možne različne izvedbe cilindra (obešanka, polcilindar, ključavnice...)	more types of locking mechanism is possible (padlock, half-cylinder, cam locks...)
	funkcija Anti-Snap Cylinder - kontrolirana zona lomljenja	funkcija Anti-Snap Cylinder - območje kontroliranega loma cilindra	function ASC - Anti-Snap Cylinder with controlled breaking zone
	funkcija DOMINO - dvije kombinacije zaključavanja za jedan cilindar (1. okretanjem poništava 2.)	funkcija DOMINO - dve zaklepni kombinaciji v enem cilindru	function DOMINO: 2 set of keys, keyed to differ, for one cylinder (2nd set after turning invalidate 1st set)
	kopiranje ključeva samo uz predložitev kartice	kopiranje ključev, le ob predložitvi kartice	key cutting only after presenting owner's card
	zaščita od bušenja	zaščita pred vrtanjem	drill protection
	zaščita od češljanja, potiskivanja i sl.	zaščita proti tipanju, potiskanju klinov ipd.	protection from picking, pins pushing etc.
	ugrađeni spec. sigurnosni klinovi i/ili lamele protiv bumpinga	vgrajeni posebni varnostni klini in/ali lamele proti bumpingu	special security pins and or wafers against bumping installed
	specijalni vertikalni profil - onemogućuje pristup mehanizmu provalničkim alatom	poseben vertikalni profil onemogoča dostop v mehanizem vlomilskemu orodju	special vertical profile - prevents access to locking mechanism with breaking tools

	bočni kontrolni klinovi za autorizaciju ključa	stranski kontrolni klini za kontrolo ključa	side control pins for key authorisation
	gornji kontrolni klinovi za autorizaciju ključa	zgornji kontrolni klini za kontrolo ključa	upper control pins for authorisation
	ključ od novog srebra (posebna legura koja štiti mehanizam cilindra)	ključ iz novega srebra (posebna zlitina, ki štiti mehanizem cilindra)	nickel silver keys (special alloy which protects locking mechanism)
	zaštita od kopiranja ključeva patentom	s patentom zaščiteni ključi	protection from unauthorised key cutting with patent
	patentirani dvojni mehanizam zaključavanja	patentiran dvojni mehanizem zaklepanja	patented double locking mechanism
	patentirani sustav aktivnih bočnih lamela	patentiran sistem aktivnih bočnih lamel	patented side levers locking mechanism
	vremenski neograničen patent	časovno neomejen patent	unlimited patent
	sukladno europskoj normi EN 1303	v skladu z evropskim standardom EN 1303	in accordance with norm EN 1303



	dupli cilindar se otključava samo s jedne strane (standard)	dvojni cilindar z odklepanjem samo iz ene strani (standard)	double cylinder could be locked from one side at time (standard)
	dupli cilindar se otključava s obje strane čak i kada je ključ s druge strane (T funkcija)	dvojni cilindar z odklepanjem iz obeh strani tudi ko je ključ vstavljen na drugi strani (T funkcija)	double cylinder could be locked from both sides even when keys is on other side (T function)
	slobodan hod prstena 360° (antipanic sustavi, motorizirane brave i sl.)	prosto vrteč prstan 360° (anti-panic sistemi, ključavnice z elektromotorjem, ipd.)	free cam turn of 360° (antipanic systems, motorised locks etc.)
	Anti-AMOK - otključavanje cilindra gdje ključ i gumb rade neovisno	Anti-AMOK- odklepanje cilindra, kjer je ključ neodvisen od gumba	Anti-AMOK - unlocking of double knob cylinder where key side and knob side work independently
	možućnost izrade sistema zaključavanja na isti ključ	možnost izdelave sistema na isti ključ	possibility of making keyed alike system
	možućnost izrade master ključa/sistema zaključavanja	možnost izdelave glavnega ključa/zaklepne-ga sistema	possibility of making master key / master locking system

	površinska zaštita cilindra (mat nikal, nikal, mesing i dr.)	površinska zaštita cilindra (mat nikelj, nikelj, medenina in drugo)	cylinder finish (matt nickel, nickel, brass etc.)
	moгуće različite izvedbe cilindra (lokot, polucilindar, bravice...)	moжne različne izvedbe cilindra (obešanka, polcilinder, ključavnice...)	various types of locking mechanism is possible (padlock, half-cylinder, cam locks...)
	funkcija modularni cilindar - protulomni cilindar + fleksibilna dimenzija	funkcija modularni cilindar - protivlomni cilindar + spremljiva dimenzija	Modularity function: resistance against breaking and plug pulling; flexibility in dimension
	kopiranje ključeva samo uz predloženje kartice	kopiranje ključev, le ob predložitvi kartice	key cutting with owner's card
	kompatibilnost s elektroničkim sistemima (DOM ENIQ i sl.)	kompatibilno z elektronskim sistemom (DOM ENIQ in podobni)	compatibility with DOM electronic access control systems (DOM ENIQ etc.)
	zaštita od bušenja	zaštita pred vrtanjem	drill protection
	zaštita od češljanja, potiskivanja, bumpinga i sl.	zaštita proti tipanju, potiskanju klinov ipd.	protection from picking, pins pushing, bumping etc.
	dvije kombinacije zaključavanja za jedan cilindar (1. okretanjem poništava 2.) (DOM ix Saturn)	dve zaklepni kombinaciji v enem cilindru (DOM ix Saturn)	2 set of keys, keyed to differ, for one cylinder (2nd set after turning invalidate 1st set) (DOM ix Saturn)
	mobilni element u ključu; maksimalna zaštita od kopiranja	gibljiv element v ključu, maksimalna zaštita proti kopiranju	floating bearing roller: extremely high protection against unauthorised key cutting
	zaštita od kopiranja ključeva	zaštita proti kopiranju ključev	protection from unauthorised key cutting with patent
	sukladno europskoj normi EN 1303	v skladu z evropskim standardom EN 1303	in accordance with norm EN 1303
	ispitano u institutu VdS u Njemačkoj - najviši rang sigurnosti (3 od 3 zvjezdice)	preizkušeno na inštitutu VdS v Nemčiji - uvrščen v najvišji razred varnosti (3 od 3 zvezdice)	tested in VdS institute in Germany - the highest security level (3 out of 3 stars)
	pojedinačni cilindar - s jedinstvenom kombinacijom zaključavanja i vlasničkom karticom	posamezni cilindar z unikatno kombinacijo zaklepanja in lastniško kartico	single coded cylinder – with unique locking combination and registration card / security card / systemcard
	zaštita patentom do 2023. godine	patentna zaštita do leta 2023	protected by patent until 2023
	zaštita patentom do 2026. godine	patentna zaštita do leta 2026	protected by patent until 2026



ELEKTRONSKI SIGURNOSNI SUSTAVI
ELEKTRONSKI VARNOSTNI SISTEMI
ELECTRONIC SECURITY SYSTEMS

DOM ENiQ® Mifare



HR

- jednostavno programiranje korisničkih kartica uz pomoć master kartice
- može se ugraditi u gotovo bilo koja vrata
- jednostavna i brza montaža:
 - umjesto klasičnog cilindra
 - bez kablova i ožičavanja
 - nema bušenja
- najviša razina sigurnosti atesirano kod VdS-a, razred BZ+ (★★★), vodootporno IP 65, protupožaranost T90
- do 5.000 korisnika po uređaju/vratima
- pohranjuje zadnjih 2.000 događaja
- obrada: češljani inox (117), gumbi crno, gumbi bijelo
- pripremljen za on-line sistem

TIPOVI CILINDARA

- cilindar DZ; 1-strana kontrola; dimenzije 30x30 do 80x80 mm
- cilindar DZ; 2-strana kontrola; dimenzije 30x30 do 80x80 mm
- cilindar za staklena vrata GL; 1-strana kontrola; dimenzije unutarnje: 10/12,5/15/17,5/20/22,5/25/27,5 x vanjske: 30/35/40 mm
- polucilindar HZ; 1-strana kontrola; dimenzije 10x30 do 10x80 mm

DODATNA OPREMA

- master kartica 351973
- programska kartica 351975
- set baterija 359016
- ključača za gumb 515820
- vilasti ključ za osovinu 515814
- odvijač Torx TX 6

za više detalja kontaktirajte Odjel sistema zaključavanja (sistemi@titan-hrvatska.hr)

SLO

- enostavno programiranje uporabniških kartic z glavno kartico
- vgradnja možna skoraj v vsaka vrata
- enostavna in hitra montaža:
 - namesto klasičnega cilindra
 - brez kablov in žic
 - brez vrtanja
- najvišja stopnja varnosti, atestirano pri VdS-ju, razred BZ+ (★★★), vodoodporno IP 65, protipožarno T90
- do 5.000 uporabnikov naprave/vrat
- shrani zadnjih 2.000 dogodkov
- obdelava: krtačen nerjavečo jeklo (117), črni gumbi, beli gumbi
- pripravljen za on-line sistem

VRSTE CILINDROV

- cilindar DZ; enostranska kontrola, dimenzije 30x30 do 80x80 mm
- cilindar DZ; dvostranska kontrola, dimenzije 30x30 do 80x80 mm
- cilindar za staklena vrata GL; enostranska kontrola, dimenzije- notranje 10/12,5/15/17,5/20/22,5/25/27,5 x zunanje: 30/35/40 mm
- polcilindar HZ- enostranska kontrola, dimenzije 10x30 do 10x80 mm

DODATNA OPREMA

- glavna kartica 351973
- programska kartica 351975
- set baterija 359016
- klešče za gumb 515820
- vilčast ključ za os 515814
- izvijač torx TX 6

za podrobnosti kontaktirajte Oddelek zaklepnih sistemov (info@titan.si)

EN

- simple programming of user cards with master card
- cylinder for every door
- simple and fast installation;
 - instead mechanical cylinder
 - without cabling
 - without drilling of walls or doors
- the highest security level certified by VdS, class BZ+ (★★★), water resistant IP 65, fireproof T90
- up to 5.000 users per cylinder/door
- data of last 2.000 events
- finish: brushed stainless steel (117), knobs black, knobs white
- prepared for on-line system

CYLINDER TYPES

- cylinder DZ; readable from one side; dimensions from 30x30 up to 80x80 mm
- cylinder DZ; readable from both sides; dimensions from 30x30 up to 80x80 mm
- glass door cylinder GL; readable from one side; dimensions inside: 10/12,5/15/17,5/20/22,5/25/27,5 x outside: 30/35/40 mm
- half-cylinder HZ; readable from one side; dimensions from 10x30 up to 10x80 mm

ACCESSORIES

- master card 351973
- programming card 351975
- battery set 359016
- pliers for knob 515820
- open end spanner 515814
- screwdriver Torx TX 6

for more details contact Master locking systems department (info@titan.si)


DOM Guardian® Mifare



HR



SLO



EN

- jednostavno programiranje korisničkih kartica uz pomoć master kartice
- može se kombinirati s DOM ENiQom
- za vrata debljine 34 – 114 mm
- moguće izabrati i štit s rupom za cilindar
- atestiran na protupožarnost T30 s funkcijom DND (ne smeta), atestirano prema EN 179
- do 5.000 korisnika po uređaju / vratima
- pohranjuje zadnjih 2000 događaja
- štit od inoxa, obrada: češljani inox (117)
- garnitura DOM Guardian® Mifare vanjski štit s odgovarajućim unutarnjim štitom:
 - bez rupe za cilindar
 - brušeni inox
 - kvaka Gehrung („L” oblik)
 - rupa za trn kvake 9 mm
 - set vijaka za montažu kroz vrata
- kod narudžbe navesti:
 - debljinu vrata
 - rupu za trn kvake: 7/8/8,5/9/10 mm
- posebna opcija za vanjska vrata DOM Guardian® S Mifare; rupa za cilindar 72 ili 92 mm

DODATNA OPREMA

- start set DOM Guardian® Mifare – 352138; 1 master kartica, 1 programska kartica, imbus ključ, ključ za demontažu poklopca za baterije
- set za montažu DOM Guardian® - 512926; imbus ključ, ključ za demontažu poklopca za baterije, kliješta za demontažu kvake, šablona za montažu DOM Guardian®
- baterija za Guardian – 351942

za više detalja kontaktirajte Odjel sistema zaključavanja
(sistemi@titan-hrvatska.hr)

- enostavno programiranje uporabniških kartic z glavno kartico
- lahko se uporabi skupaj s SOM ENiQjem
- za vrata debeline od 34 do 114 mm
- možen ščit z luknjo za cilindar
- s funkcijo DND (ne moti) protipožarno testiran (T30), testirano po EN 179
- do 5.000 uporabnikov naprave/vrata
- shrani zadnjih 2.000 dogodkov
- obdelava: krtačen nerjavečo jeklo (117)
- garnitura DOM Guardian® Mifare zunanji ščit z ustreznim notranjim ščitom:
 - brez luknje za cilindar
 - brušeni inox
 - kljuka Gehrung (oblika „L”)
 - luknja za ročaj kljuka 9 mm
 - set vijakov za montažo skozi vrata
- pri naročilo navesti:
 - debelino vrat
 - luknja ročaja kljuka : 7/8/8,5/9/10 mm
- posebna možnost za zunanja vrata DOM Guardian® S Mifare; luknja za cilindar 72 ali 92 mm

DODATNA OPREMA

- osnovni paket- DOM Guardian® Mifare – 352138; 1 glavna kartica, 1 programska kartica, imbus ključ za demontažo pokrova
- set za montažo DOM Guardian® - 512926; imbus ključ, ključ za demontažo pokrova baterije, klešče za demontažo kljuka, šablona za montažo DOM Guardian®
- baterija za Guardian – 351942

za podrobnosti kontaktirajte Oddelek zaklepnih sistemov
(info@titan.si)

- simple programing of user cards with master card
- can be combined with DOM ENiQ
- for door thickness 34 – 114 mm
- blind housing or housing with cylinder cut-out
- approved for T30 fire doors with function DND (do not disturb), according to EN 179
- up to 5.000 users per device / door
- keeps data of last 2.000 events
- shield from stainless steel, finish: brushed stainless steel (117)
- DOM Guardian® exterior fitting set with corresponding internal plate:
 - without profile cylinder cut-out
 - stainless steel, brushed
 - mitre handle („L” shape)
 - square spanner 9 mm
 - set of screws for pierced doors
- when ordering state:
 - door thickness
 - square spanner size: 7/8/8,5/9/10 mm
- special option for outdoor doors DOM Guardian® S Mifare; Cylinder cut-out 72 or 92 mm

ACCESSORIES:

- starter set DOM Guardian® – 352138; 1 master card, 1 programming card, cover mounting spanner, battery compartment key
- assembly tool kit DOM Guardian® - 512926; cover mounting spanner, battery compartment key, handle disassembly pliers, DOM Guardian® drilling
- pre-assembled battery – 351942

for more details contact Master locking systems department (info@titan.si)

DOM Mifare transponderi | DOM Mifare transponderji | DOM Mifare Transponders



HR

SLO

EN

KORISNIČKE KARTICE ILI PRIVJESCI:

- StandardTac - STANTAC504599M (1)
(6 boja: crna, crvena, zelena, siva, bijela, žuta)
- PremiumPlusTac – 352122 (2)
- Clip Tac - CLIPTAC503513M (3)
(2 boje: crvena i antracit siva)
- ISO bijela kartica - ISOSCHE503523M (4)

PRIVJESCI VIŠEG RANGA

- StandardTac "stalno otvoreno" – 351981 (5)
- StandardTac "stalno zatvoreno" – 351983 (6)

! Svaki transponder Mifare naručen iz DOM-a ima dodatnu zaštitu od elektroničke manipulacije.

! Po želji može se naručiti software ENiQ Access Management za evidenciju kontrole pristupa 100 - 100.000 korisnika.

za više detalja kontaktirajte Odjel sistema zaključavanja
(sistemi@titan-hrvatska.hr)

UPORABNIŠKE KARTICE ALI OBESKI:

- StandardTac - STANTAC504599M (1)
(6 barv: črna, rdeča, zelena, siva, bela, rumena)
- PremiumPlusTac – 352122 (2)
- Clip Tac - CLIPTAC503513M (3)
(2 barvi: rdeča in antracitno siva)
- ISO bela kartica - ISOSCHE503523M (4)

OBESKI VIŠJEGA RANGA

- StandardTac "stalno odklenjeno" – 351981 (5)
- StandardTac "stalno zaklenjeno" – 351983 (6)

! Vsak transponder Mifare naročen v Dom-u ima dodatno zaščito proti elektronski manipulaciji.

! Po potrebi se lahko naroči ENiQ Access Management - program za evidenco kontrola dostopa 100 do 100.000 uporabnikov.

za podrobnosti kontaktirajte Oddelek zaklepnih sistemov
(info@titan.si)

USER CARDS OR TAGS:

- Standard Tag - STANTAC504599M (1)
(6 colours: black, red, green, grey, white, yellow)
- PremiumPlusTag – 352122 (2)
- Clip Tac - CLIPTAC503513M (3)
(2 colours: red and anthracite grey)
- ISO white card - ISOSCHE503523M (4)

HIGHER RANG TAGS:

- "Permanently open" tag – 351981 (5)
- "Permanently closed" tag – 351983 (6)

! Every transponder ordered from DOM has additional security protection against electronic manipulation.

! When needed it can be ordered Software ENiQ Access Management for Access Control for 100 up to 100.000 users.

for more details contact Master locking systems department (info@titan.si)



LOKOTI
OBEŠANKE
PADLOCKS

842/25




★★★★★★



842/25

842/25 DL 20

	A	B
842/25	19	53
842/25 DL 20	39	73



842/35




★★★★★★



842/35

842/35 DL 25

	A	B
842/35	26	67
842/35 DL 25	51	92

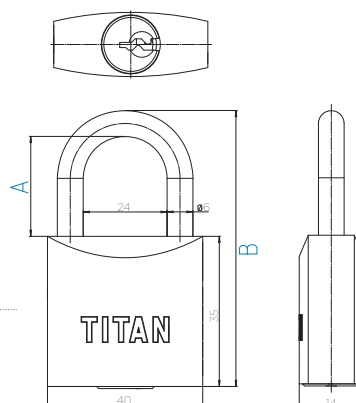

842/45



★★★★★☆☆





842/45 Ni

842/45 MS

842/45 DL 20

842/45 DL 40

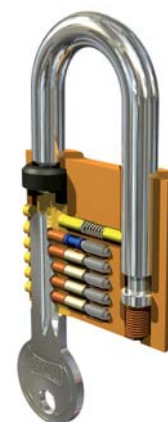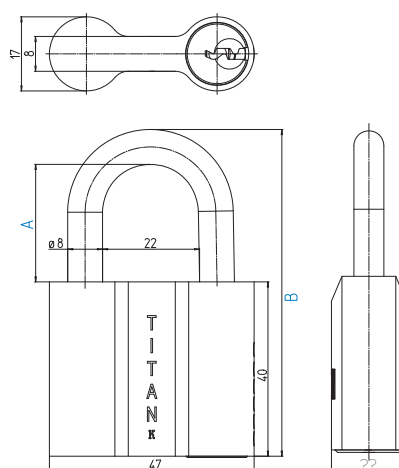

	A	B
842/45 MS (Ni)	27	75
842/45 DL 20	47	95
842/45 DL 40	67	115

HR

- TIJELO I JEZGRA: mesing
- LOCNA: kaljeni čelik Ni
- DVA KLJUČA: čelik Ni
- Mogućnost produžene locne 20 mm
- Automatsko zaključavanje potiskivanjem locne (bez ključa)
- Posebni sigurnosni klinovi protiv češljanja
- Ključ se izvlači u otključanom i zaključanom položaju
- Opcija sistema zaključavanja na isti ključ
- U sistemima zaključavanja moguće je kombinirati sljedeće bravice: PKR 101, PKR 102, PKR 103
- Šifra sirovog ključa: T12 P

SLO

- OHIŠJE IN JEDRO: medenina PA
- LOCEN: kaljeno jeklo Ni
- DVA KLJUČA: jeklo Ni
- Opcija podaljšanega locna 20 mm
- Deluje avtomatsko (zaklepanje brez ključa)
- Posebno oblikovani varovalni klini (varovanje proti tipanju)
- Izvlek ključa v odklenjenem in zaklenjenem položaju
- Možno izdelati v sistemu enotnega ključa
- V sistemu enotnega ključa moguće je kombinirati bravice: PKR 101, PKR 102, PKR 103
- Koda surovega ključa: T12 P

EN

- BODY AND PLUG: brass PA
- SHACKLE: hardened steel Ni
- 2 KEYS: steel Ni
- Option with shackle extended 20 mm
- It works automatically (locking without a key)
- Mushroom type pins protection
- Key can be pull out in locked and unlocked position
- Option keyed alike systems
- In keyed alike system is possible to combine with cam locks: PKR 101, PKR 102, PKR 103
- Blank key code: T12 P

- TIJELO I JEZGRA: mesing
- LOCNA: kaljeni čelik Ni
- DVA KLJUČA: čelik Ni
- Mogućnost produžene locne 25 mm
- Locna standardne dužine može se naručiti od inox-a
- Automatsko zaključavanje potiskivanjem locne (bez ključa)
- Posebni sigurnosni klinovi protiv češljanja
- Ključ se izvlači u otključanom i zaključanom položaju
- Moguća izrada svih sistema zaključavanja
- U sistemima zaključavanja moguće je kombinirati sljedeće bravice: KO-10 i 852/30
- Šifra sirovog ključa: T10 P

- OHIŠJE IN JEDRO: medenina
- LOCEN: kaljeno jeklo Ni
- DVA KLJUČA: jeklo Ni
- Opcija podaljšanega locna 25 mm
- Opcija inox locna za standardno dolžino
- Deluje avtomatsko (zaklepanje brez ključa)
- Posebno oblikovani varovalni klini (varovanje proti tipanju)
- Izvlek ključa v odklenjenem in zaklenjenem položaju
- Možno izdelati v sistemu zaklepanja
- V sistemu zaklepanja je mogoče uporabiti tudi ključavnici KO-10 in 852/30
- Koda surovega ključa: T10 P

- BODY AND PLUG: brass PA
- SHACKLE: hardened steel Ni
- 2 KEYS: steel Ni
- Option with shackle extended 25 mm
- Option stainless steel shackle standard dimension
- It works automatically (locking without a key)
- Mushroom type pins protection
- Key can be pull out in locked and unlocked position
- Option master locking system
- In master locking system possible to combine with cam locks: KO-10 i 852/30
- Blank key code: T10 P

- TIJELO I JEZGRA: mesing (obrada MS ili Ni)
- LOCNA: kaljeni čelik Ni
- DVA KLJUČA: čelik Ni
- Mogućnost produžene locne 20 i 40 mm
- Locna standardne dužine i produžene mogu se naručiti od inox-a
- Lokot se zaključava samo okretanjem ključa
- Posebni sigurnosni klinovi protiv češljanja
- Ključ se izvlači samo u zaključanom položaju
- Moguća izrada svih sistema zaključavanja
- Standardno se isporučuje u A profilu za pojedinačne lokote, a može se još birati između sljedećih profila za sisteme zaključavanja: B, W, TL, K5, K55, T100RX.
- U sistemima zaključavanja moguće je kombinirati:
 - cilindre svih oblika i izvedbi
 - bravice KO-11, KO-13 i EI-13
 - lokot 842/50, 777-03-SW, 777 P391
 - VDC cilindar za sigurnosnu dodatnu bravu 784
 - cilindar za sigurnosnu poprečnu bravu 793
- Šifra sirovog ključa: K58 NT A profil


- OHIŠJE IN JEDRO: medenina PA
- LOCEN: kaljeno jeklo Ni
- DVA KLJUČA: jeklo Ni
- Opcija podaljšanega locna 20 in 40 mm
- Opcija inox locna za vse standardne in podaljšane dolžine
- Obešanka se lahko zaklene samo s ključem
- Posebno oblikovani varovalni klini (varovanje proti tipanju)
- Izvlek ključa samo v zaklenjenem položaju
- Možno izdelati v vseh sistemih zaklepanja profilnih cilindrov
- Standardno dobavljiva v A profilu, po naročilu je dobavljiva (sistemi zaklepanja) v: B, W, TL, K5, K55, T100RX profilu.
- V sistemu zaklepanja je mogoče kombinirati:
 - vse profile cilindre
 - ključavnice KO-11, KO-13 in EI-13
 - obešanka 842/50, 777-03-SW, 777 P391
 - cilindar VDC z pribitno ključavnico 784
 - cilindar za prečno zaporo 793
- Koda surovega ključa: K58 NT A

- BODY AND PLUG: brass PA (finish MS or Ni)
- SHACKLE: hardened steel Ni
- 2 KEYS: steel Ni
- Option with shackle extended 20 and 40 mm
- Option stainless steel shackle in all dimension
- Padlock can be locked only with the key
- Mushroom type pins protection
- Key can be pull out only in locked position
- Supports all types of master locking system
- Great scale of key profiles: standard profile is A, but it can be deliver in profiles: B, W, TL, K5, K55, T100RX
- Possible to combine in all master locking systems:
 - profile cylinder of all shapes and options
 - cam locks KO-11, KO-13, EI-13
 - padlock 842/50, 777-03-SW, 777 P391
 - special cylinder VDC for rim lock 784
 - cylinder for cross bar door lock 793
- Blank key code: K58 NT A profil


842/50



★★★★★

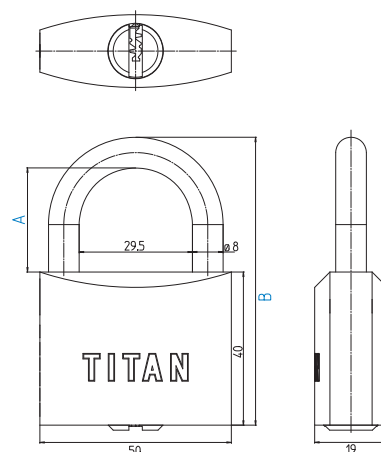


	A	B
842/50	27,5	75,5
842/50 DL 32,5	60	108

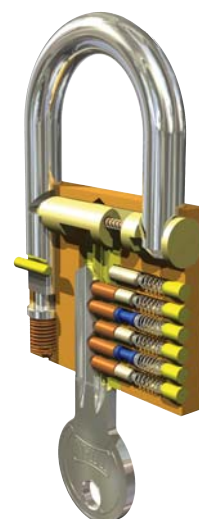

842/848



★★★★★★+

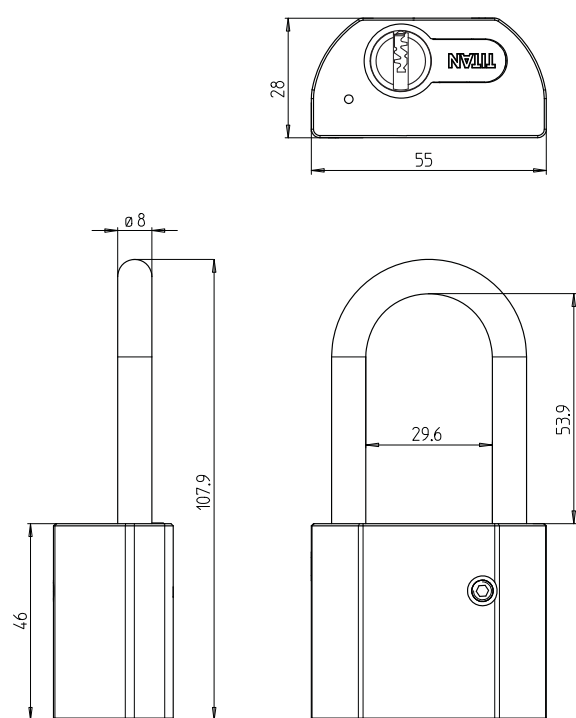

HR

- TIJELO I JEZGRA: mesing
- LOCNA: kaljeni čelik Ni
- DVA KLJUČA: čelik Ni
- Mogućnost produžene locne 32,5 mm
- Locna standardne dužine i produžena mogu se naručiti od inox-a
- Automatsko zaključavanje potiskivanjem locne (bez ključa)
- Posebno oblikovani sigurnosni klinovi protiv češljanja
- Ključ se izvlači u otključanom i zaključanom položaju
- Moguća izrada svih sistema zaključavanja
- Standardno se isporučuje u A profilu za pojedinačne lokote, a može se još birati između sljedećih profila za sisteme zaključavanja: B, W, TL, K5, K55, T100RX.
- U sistemima zaključavanja moguće je kombinirati:
 - cilindre svih oblika i izvedbi
 - bravice KO-11, KO-13, EI-13
 - lokot 842/45, 77-03-SW, 777 P391
 - VDC cilindar za sigurnosnu dodatnu bravu 784 te
 - cilindar za sigurnosnu poprečnu bravu 793
- Šifra sirovog ključa: K58 NT A profil

SLO

- OHIŠJE IN JEDRO: medenina PA
- LOCEN: kaljeno jeklo Ni
- DVA KLJUČA: jeklo Ni
- Opcija podaljšanega locna 32,5 mm
- Možnost izdelave locnja v inox varianti za vse dolžine
- Deluje avtomatsko (zaklepanje brez ključa)
- Posebno oblikovani varovalni klini (varovanje proti tipanju)
- Ključ se lahko izvleče v zaklenjenem in odklenjenem položaju
- Možno izdelati v vseh sistemih zaklepanja profilnih cilindrov (na isti ključ, centralnega cilindra, glavnega ključa, generalnega ključa, večstopenjski sistem)
- Standardno dobavljivo v A profilu, možna izdelava v sistemu naslednjih profilih: B, W, TL, K5, K55, T100RX.
- V sistem zaklepanja možnost kombiniranja:
 - cilindre vseh oblik in izvedb
 - ključavnice za pohošstvo KO-11, KO-13, EI-13
 - obešanka 842/45, 777-03-SW, 777 P391
 - cilindar VDC za pribitno ključavnico 784
 - cilindar za prečno zaporo 793
- Koda surovega ključa: K58 NT A profil

EN

- BODY AND PLUG: brass PA
- SHACKLE: hardened steel Ni
- 2 KEYS: steel Ni
- Option with shackle extended 32,5 mm
- Option stainless steel shackle in all dimension
- It works automatically (locking without a key)
- Mushroom type pins protection
- Key can be pull out in locked and unlocked position
- Supports all types of master locking system (Keyed alike, Central lock system, Central master key system, Master key system, General Master Key System)
- Great scale of key profiles: standard profile is A, but it can be deliver in profiles: B, W, TL, K5, K55, T100RX
- Possible to combine in master locking systems:
 - profile cylinder of all shapes and options
 - cam locks KO-11, KO-13, EI-13
 - padlock 842/45, 777-03-SW, 777 P391
 - special cylinder VDC for rim lock 784
 - cylinder for cross bar door lock 793
- Blank key code: K58 NT A profil

- TIJELO: mesing
- LOCNA: inox
- Ključ se izvlači u zaključanom položaju
- Zaključavanje preko euro polucilindra
- Opcija polucilindra T200 - patentirani ključ sprječava neovlašćeno kopiranje ključeva
- Posebni sigurnosni klinovi protiv češljanja
- Moguća izrada svih sistema zaključavanja
- Moguće izabrati između velikog broja patentiranih polucilindara TITAN i DOM: T100RX, DOM ix DAS, T200, ix 6 SR, T250, ix Saturn, diamant.
- Patentirani ključ se kopira samo u TITAN-u i DOM-u uz predložene servisne ili vlasničke kartice
- U sistemima zaključavanja moguće je kombinirati:
 - cilindre svih oblika i izvedbi
 - bravicu 382 ili KO-11, KO-13 i EI-13
 - lokot 777-02-M ili 842/45, 842/50, 777 P391
 - 555 P ili VDC cilindar za sigurnosnu dodatnu bravu 784 te
 - cilindar za sigurnosnu poprečnu bravu 793

- OHIŠJE: medenina PA
- LOCEN: inox
- Ključ se izvleče samo v zaklenjenem položaju
- Zaklepanje z evro polcilindrom
- Možnost uporabe polcilindra T200 - patentiran ključ preprečuje nepooblašćeno kopiranje ključev
- Posebni varovalni klini (varovanje proti tipanju)
- Možna izdelava v vseh sistemih zaklepanja
- Izbira med velikim številom patentiranih polcilindrov TITAN in DOM: T100RX, DOM ix DAS, T200, ix 6 SR, T250, ix Saturn, diamant.
- Patentiran ključ je možno izdelati samo v TITAN-u ali DOM-u ob preložitvi servisne ali lastniške kartice
- V sistema zaklepanja možnost kombiniranja:
 - cilindre vseh oblik in izvedb
 - ključavnice za pohošstvo 382 ali KO-11, KO-13 in EI-13
 - obešanka 777-02-M ali 842/45, 842/50, 777 P391
 - cilindar 555 P ali VDC za pribitno ključavnico 784
 - cilindar za prečno zaporo 793

- BODY: brass PA
- SHACKLE: stainless steel
- Key can be pull out in locked position
- Locking with euro profile half-cylinder
- Option half-cylinder T200 - patented key prevents unauthorized key copy
- Mushroom type pins protection
- Supports all types of master locking system
- Great scale of patented key profiles TITAN and DOM: standard profile is A, but it can be deliver in profiles: T100RX, DOM ix DAS, T200, ix 6 SR, T250, ix Saturn, diamant.
- Patented keys can be made only by TITAN or DOM with condition of presenting service or owner's card.
- Possible to combine in master locking systems:
 - profile cylinder of all shapes and options
 - cam locks 382 or KO-11, KO-13 and EI-13
 - padlock 777-02-M or 842/45, 842/50, 777 P391
 - special cylinder 555 P or VDC for rim lock 784
 - cylinder for cross bar door lock 793

777-02-M



★★★★★☆☆

Do isteka zaliha

Do isteka zaliha

Expiring model


	A	B
777-02-M	35	94
777-02-M DL 25	60	119



777 P391



★★★★★★★

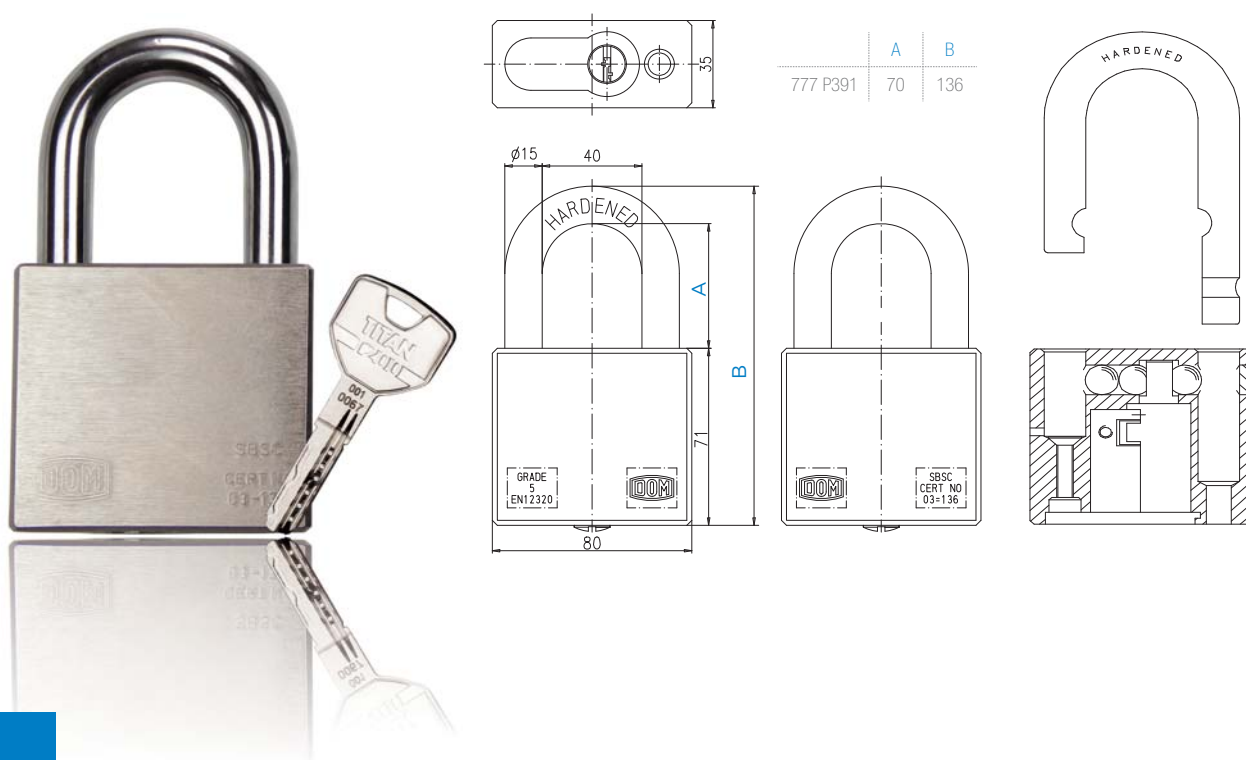

HR

- TIJELO I JEZGRA: mesing (jezgra Duracast za diamant)
- LOCNA: kaljeni čelik Ni
- Mogućnost produžene locne 25 mm
- Automatsko zaključavanje potiskivanjem locne (bez ključa)
- Posebni sigurnosni klinovi protiv češljanja
- Ključ se izvlači u otključanom i zaključanom položaju
- Moguća izrada svih sistema zaključavanja
- Moguće izabrati veliki broj profila ključeva: DOM ix DAS / ix 6 SR / ix Saturn / diamant
- Zaključavanja preko specijalnog DOM polucilindra
- Patentirani ključ se kopira samo u TITAN-u i DOM-u uz predodjenje servisne ili vlasničke kartice
- U svim sistemima moguće je kombinirati:
 - cilindre svih oblika i izvedbi
 - bravicu 382
 - lokot 777-03-SW, 777 P391
 - 555 P cilindar za sigurnosnu dodatnu bravu 784 te
 - cilindar za sigurnosnu poprečnu bravu 793.

SLO

- OHIŠJE IN JEDRO: medenina PA (jedro Duracast za diamant)
- LOCEN: kaljeno jeklo Ni
- Opcija podaljšanega locna 25 mm
- Deluje avtomatsko (zaklepanje brez ključa)
- Posebno oblikovani varovalni klini (varovanje proti tipanju)
- Ključ se lahko izvleče v zaklenjenem in odklenjenem položaju
- Možno izdelati v vseh sistemih zaklepanja
- Možna izbira velikega števila profilov ključev: DOM ix DAS / ix 6 SR / ix Saturn / diamant
- Zaklepanje s posebnim DOM polcilindrom
- Patentiran ključ je možno izdelati samo v TITAN-u ali DOM-u ob preložitvi servisne ali lastniške kartice
- V vseh sistemih je mogoče kombinirati:
 - cilindre vseh oblik in izvedb
 - ključavnice za pohištvo 382
 - obešanka 777-03-SW, 777 P391
 - cilindar 555 P za pribitno ključavnico 784
 - cilindar za prečno zaporo 793

EN

- BODY AND PLUG: brass PA (plug Duracast for diamant)
- SHACKLE: hardened steel Ni
- Option with shackle extended 25 mm
- It works automatically (locking without a key)
- Option half-cylinder T200 - patented key prevents unauthorized key copy
- Mushroom type pins protection
- Key can be pull out in locked and unlocked position
- Supports all types of master locking system
- Great scale of key profiles: standard profile is A, but it can be deliver in profiles: DOM ix DAS / ix 6 SR / ix Saturn / diamant
- Locking with special half-cylinder
- Patented keys can be made only by TITAN or DOM with condition of presenting service or systemcard.
- Possible to combine in all master locking systems:
 - profile cylinder of all shapes and options
 - cam locks 382
 - padlock 777-03-SW, 777 P391
 - special cylinder 555 P for rim lock 784
 - cylinder for cross bar door lock 793

- TIJELO: kaljeni inox čelik Ni
- LOCNA: kaljeni inox čelik Ni
- Opcija locne: vadi se (na upit - opcija da se ne vadi)
- Ključ se može izvući u otključanom i zaključanom položaju
- Zaključavanje preko euro polucilindra
- Zaštitni poklopac na dnu protiv nasilnih provalničkih tehnika na mehanizam
- Opcija polucilindra T200 - patentirani ključ sprječava neovlašćeno kopiranje ključeva
- Posebni sigurnosni klinovi protiv češljanja
- Moguća izrada sistema zaključavanja
- Moguće izabrati između velikog broja patentiranih polucilindara TITAN i DOM: T100RX, DOM ix DAS, T200, ix 6 SR, T250, ix Saturn, diamant
- Patentirani ključ se kopira samo u TITAN-u i DOM-u uz predodjenje servisne ili vlasničke kartice
- U sistemima zaključavanja moguće je kombinirati:
 - cilindre svih oblika i izvedbi
 - bravicu 382 ili KO-11, KO-13 i EI-13
 - lokot 777-02-M ili 842/45 i 842/50, 777-03-SW
 - 555 P ili VDC cilindar za sigurnosnu dodatnu bravu 784 te
 - cilindar za sigurnosnu poprečnu bravu 793.

- OHIŠJE: kaljeno jeklo Ni
- LOCEN: kaljeno jeklo Ni
- Možnost locna: lahko se izvleče (na zahtevo - možnost, da se ga ne da odstraniti)
- Ključ se izvleče v odklenjenem in zaklenjenem položaju
- Zaklepanje z evro polcilindrom
- Zaščitni pokrov na dnu proti vlomu
- Možnost uporabe polcilindra T200 - patentiran ključ preprečuje nepooblašćeno kopiranje ključev
- Posebni varovalni klini (varovanje proti tipanju)
- Možno izdelati v vseh sistemih zaklepanja
- Možna izbira velikega števila patentiranih polcilindrov TITAN in DOM: T100RX, DOM ix DAS, T200, ix 6 SR, T250, ix Saturn, diamant
- Patentiran ključ je možno izdelati samo v TITAN-u ali DOM-u ob preložitvi servisne ali lastniške kartice
- V sistemih zaklepanje je mogoče kombinirati:
 - cilindre vseh oblik in izvedb
 - ključavnice za pohištvo 382 ali KO-11, KO-13 in EI-13
 - obešanka 777-02-M ali 842/45, 842/50, 777-03-SW
 - cilindar 555 P ali VDC za pribitno ključavnico 784
 - cilindar za prečno zaporo 793

- BODY: hardened stainless steel Ni
- SHACKLE: hardened stainless steel Ni
- Option with shackle: it can be pull out (on special request option without pulling out shackle)
- Key can be pull out in locked and unlocked position
- Locking with euro profile half-cylinder
- On the bottom protection against violent burglar techniques on mechanism
- Option: T200 half-cylinder with patented key
- Mushroom type pins protection
- Supports all types of master locking system
- Great scale of patented key profiles TITAN and DOM: standard profile is A, but it can be deliver in profiles: T100RX, DOM ix DAS, T200, ix 6 SR, T250, ix Saturn, diamant
- Patented keys can be made only by TITAN or DOM with condition of presenting service or owner's card.
- Possible to combine in all master locking systems:
 - profile cylinder of all shapes and options
 - cam locks 382 or KO-11, KO-13 and EI-13
 - padlock 777-02-M or 842/45, 842/50, 777-03-SW
 - special cylinder 555 P or VDC for rim lock 784
 - cylinder for cross bar door lock 793



Savjeti za izbor lokota | Nasveti za izbiro obešanke | How to Choose Padlock

MODEL	VRIJEDNOST IMOVINE VRIJEDNOST IMOVINE BELONGINGS VALUE	NAPOMENE NAPOMENE NOTICE		
		HR	SLO	EN
842/25 ★★★★★		može ići u kombinaciji s bravicom RONIS 22500-01	lahko se kombinira s ključavnico RONIS 22500-01	can be combined with cam lock RONIS 22500-01
842/35 ★★★★★		može ići u kombinaciji s bravicom RONIS 22500-01	lahko se kombinira s ključavnico RONIS 22500-01	can be combined with cam lock RONIS 22500-01
842/45 ★★★★+★★		- najprodavaniji model - ključ se ne može izvući dok se ne zaključa - sprječava nehotično ostavljanje ključa u lokotu ili nezaključanog lokota - za vanjsku uporabu koristiti poniklano tijelo i inox locnu	- prodajan model - ključ se izvleče samo v zaklenjenem položaju - preprečuje nenamerno pušćanje ključa v obešanki ali odklenjeno obešanko - za zunanjo uporabo uporabljaj nikljano ohišje in inox locen	- the best-selling model - key cannot be pulled until padlock is locked – prevents from undesired situation like left key in padlock or unlocked padlock - for outside use recommended nickel finish and stainless steel shackle
842/50 ★★★★★		robustan lokot	robustna obešanka	robust padlock
777-02-M ★★★★+★★		- robustan lokot - isporučuje se samo sa sigurnosnim profilima ključeva DOM - nije moguće neovlašteno kopiranje ključeva	- robustna obešanka - na voljo samo z DOM profili ključev - ni mogoče nedovoljeno kopiranje ključev	- robust padlock - delivered only with DOM security profiles - impossible unauthorised key cutting
842/848 ★★★★★+		- masivan sigurnosni lokot - iznimno otporan na provalničke tehnike - za čuvanje imovine velike vrijednosti (skladišta, kontejneri i sl.) - za polucilindar 10x30	- masivna varnostna obešanka - izjemno odporna na različne vlomilske tehnike - za zavarovanje premoženja velikih vrednosti (skladišča, zabojniki, itd) - za polcilinder 10x30	- massive security padlock - extremely resistant od breaking techniques - for property of great value (stocks, containers etc.) - for half-cylinder 10x30
777 P391 ★★★★★		- atestirani sigurnosni lokot razreda 5 prema EN 12320 - kompletno od kaljenog inox materijala, iznimno otporan na provalničke tehnike - isporučuje se samo s patentiranim polucilindrima TITAN i DOM - za čuvanje imovine velike vrijednosti (skladišta, kontejneri i sl.)	- atestirana varnostna obešanka razreda 5 po EN12320 - obešanka izdelana iz kaljenega nerjavečega materiala, izjemno odporna na različne vlomilske tehnike - na voljo le s patentiranimi polcilindri TITAN in DOM - za zavarovanje premoženja velikih vrednosti (skladišča, zabojniki, itd)	- certified security padlock acc. to EN 12320, class 5 - completely made from hardened stainless steel, extremely resistant on breaking techniques - delivered only with patented TITAN or DOM half-cylinders - for property of great value (stocks, containers etc.)



BRAVICE ZA NAMJEŠTAJ I ORMARIĆE
KLJUČAVNICE ZA POHIŠTVO
FURNITURE LOCKS AND CAM LOCKS

852/30

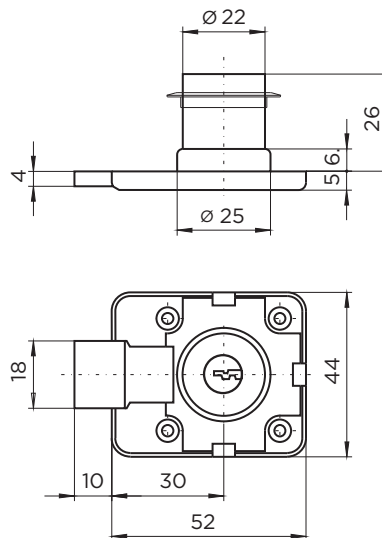

HR

- bravica za drvene ormariće
- cilindrični mehanizam
- cilindar Ø 22 mm
- 2 ključa i rozeta
- šifra sirovog ključa: T10 P FeNi



SLO

- ključavnica za pohištvo
- cilindrični mehanizem
- cilindar Ø 22 mm
- 2 ključa in rozeta
- koda surovca: T10 P FeNi

EN

- furniture locks
- cylinder rim lock - pin tumbler mechanism
- cylinder Ø 22 mm
- 2 keys and rosette
- blank key code: T10 P FeNi

845/35

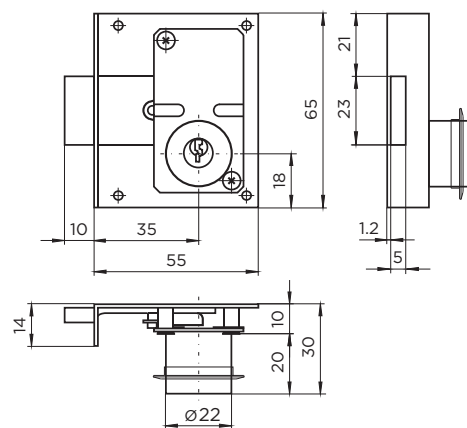

HR

- bravica za drvene ormariće
- cilindrični mehanizam
- cilindar Ø 22 mm
- 2 ključa i rozeta
- šifra sirovog ključa: T10 P FeNi

SLO

- ključavnica za pohištvo
- cilindrični mehanizem
- cilindar Ø 22 mm
- 2 ključa in rozeta
- koda surovca: T10 P FeNi


EN

- furniture locks
- cylinder rim lock - pin tumbler mechanism
- cylinder Ø 22 mm
- 2 keys and rosette
- blank key code: T10 P FeNi


853/A (853 01*)

853/B (853 02*)


853/C (853 03*)

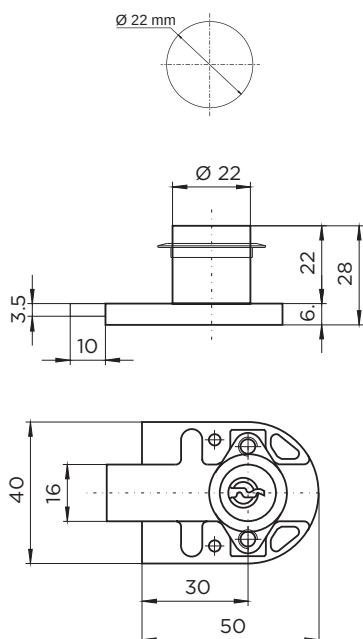

853/A

853/B
853/C

	A
853/B	321
853/C	455

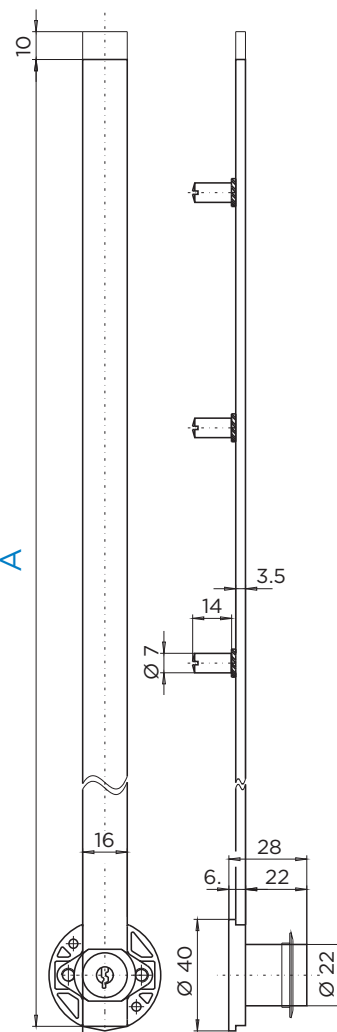

HR

- bravica za drvene ormariće
- centralno zaključavanje ladica**
- lamelarni mehanizam
- cilindar Ø 22 mm
- 2 ključa, rozeta
- 3 klina**
- šifra sirovog ključa: T12 L FeNi

** odnosi se na 853/B i 853/C

* stara šifra **stara koda** previous code

SLO

- ključavnica za pohištvo
- za centralno zaklepanje pisarniškega pohištva**
- lamelni mehanizem
- cilindar Ø 22 mm
- 2 ključa, rozeta
- 3 klini**
- koda surovca: T12 L FeNi



** velja za 853/B i 853/C

EN

- furniture locks
- for central locking of the cabinet furniture drawer**
- wafer cylinder - wafer tumbler mechanism
- cylinder Ø 22 mm
- 2 keys, rosette
- 3 pins**
- blank key code: T12 L FeNi

** 853/B i 853/C only

4500-01

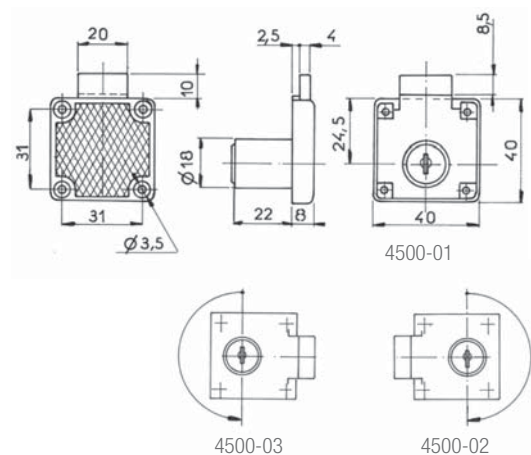HR

SLO


EN

- bravica za drvene ormariće (do 22 mm)
- lamelarni mehanizam
- cilindar Ø 18 mm
- ključ je moguće izvući u položaju otključano i zaključano
- 2 ključa i rozeta
- šifra sirovog ključa: SH-SM FeNi
- mogućnost sistema zaključavanja u profilu SM

- ključavnica za majhna vrata iz lesa (do 22 mm)
- lamelni mehanizem
- cilindar Ø 18 mm
- ključ je mogoče izvelči v položaju zaklenjeno in odklenjeno
- 2 ključa in rozeta
- koda surovca: SH-SM FeNi
- možnost sistema zaklepanja v profilu SM

- furniture locks for wooden doors (max 22 mm)
- wafer cylinder - wafer tumbler mechanism
- cylinder Ø 18 mm
- key can be pulled out in positions locked and unlocked
- 2 keys and rosette
- blank key code: SH-SM FeNi
- possible master locking system in SM profile

18600-01

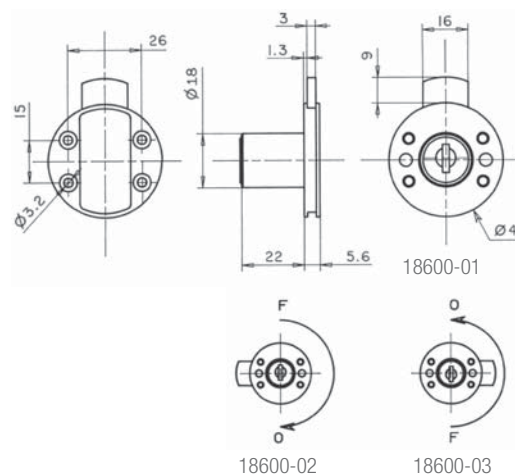HR

SLO

EN

- bravica za drvene ormariće (do 22 mm)
- lamelarni mehanizam
- cilindar Ø 18 mm
- ključ je moguće izvući u položaju otključano i zaključano
- 2 ključa i rozeta
- šifra sirovog ključa: SH-SM/KT-TK FeNi
- mogućnost sistema zaključavanja u profilu SM, KT i TK

- ključavnica za majhna vrata iz lesa (do 22 mm)
- lamelni mehanizem
- cilindar Ø 18 mm
- ključ je mogoče izvelči v položaju zaklenjeno in odklenjeno
- 2 ključa in rozeta
- koda surovca: SH-SM FeNi
- možnost sistema zaklepanja v profilu SM, KT in TK

- furniture locks for wooden doors (max 22 mm)
- wafer cylinder - wafer tumbler mechanism
- cylinder Ø 18 mm
- key can be pulled out in positions locked and unlocked
- 2 keys and rosette
- blank key code: SH-SM FeNi
- possible master locking system in SM, KT, TK profile


PL-01 (853/PL-01 V*)



HR

SLO

- bravica za vitrine
- lamelarni mehanizam
- cilindar Ø 22 mm
- 2 ključa i rozeta
- šifra sirovog ključa: T12 L FeNi

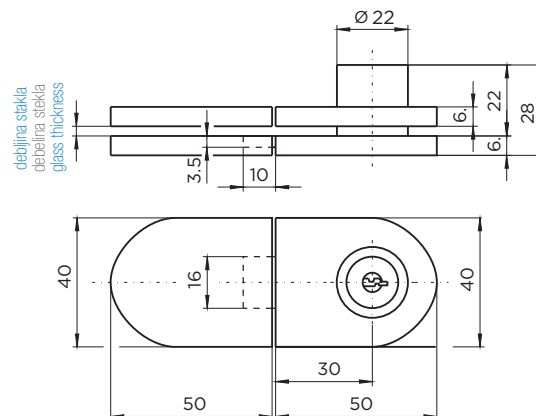

EN

- furniture locks for glass door
- wafer cylinder - wafer tumbler mechanism
- cylinder Ø 22 mm
- 2 keys and rosette
- blank key code: T12 L FeNi


31150-01



HR

SLO

- bravica za vitrine (do 8 mm)
- lamelarni mehanizam
- ključ se vadi samo u poziciji zaključano
- 2 ključa i zasun
- šifra sirovog ključa: SH FeNi
- mogući sistemi zaključavanja na isti ključ - profil SH

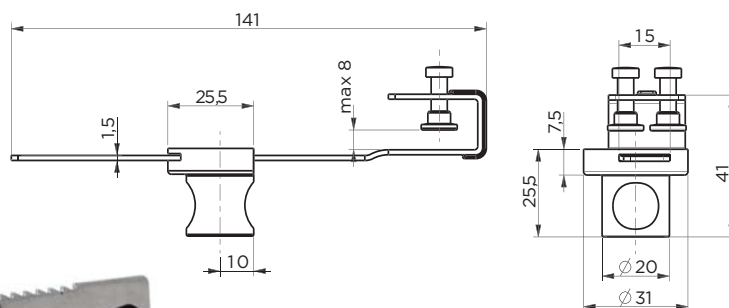

EN

- ključavnica za vitrine (do 8 mm)
- lamelarni mehanizam
- ključ je mogoče izvleči samo v položaju zaklenjeno
- 2 ključa in zapah
- koda surovca: SH FeNi
- možnost sistema zaklepanja na isti ključ - profil SH
- furniture locks for glass door (up to 8 mm)
- wafer cam lock - wafer tumbler mechanism
- key can be extracted only in position locked
- 2 keys and cam
- blank key code: SH FeNi
- possible keyed alike in SH profile

* stara šifra **stara koda** previous code

PKR 101

PKR 102

PKR 103







PKR 101



PKR 102





PKR 103



PKR 101

PKR 102

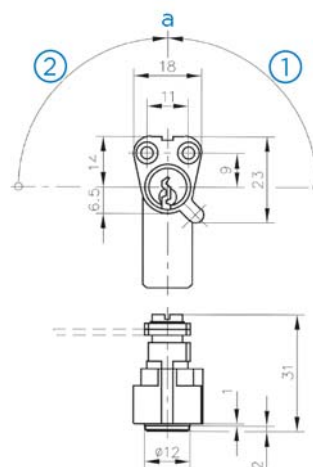

PKR 103

HR

- bravica za poštanske i slične metalne ormariće
- cilindričan mehanizam
- rotacija ključa i zasuna 90°
- ključ je moguće izvući samo u položaju "a"
- zasun je moguće staviti u 4 različita početna položaja (str. 72)
- 2 ključa, rozeta, zasun i 2 vijka M3x8
- šifra sirovog ključa: T12 P FeNi


SLO

- ključavnica za zaklepanje pisemskih nabiralnikov in podobne kovinske opreme
- cilindrični mehanizem
- hod ključa in zapaha 90°
- ključ je mogoče izvléči samo v položaju "a"
- zapah je mogoče postaviti v 4 različne začetne pozicije (str. 72)
- 2 ključa, rozeta, zapah in 2 vijaka M3x8
- koda surovca: T12 P FeNi

EN

- cam lock for locking postboxes and other similar metallic devices
- cylinder cam lock - pin tumbler mechanism
- rotation of the key and locking cam for 90°
- key pull out in a position "a"
- cam can be in 4 different position (p. 72)
- 2 keys, rosette, cam and 2 screws M3x8
- blank key code: T12 P FeNi

KO-12

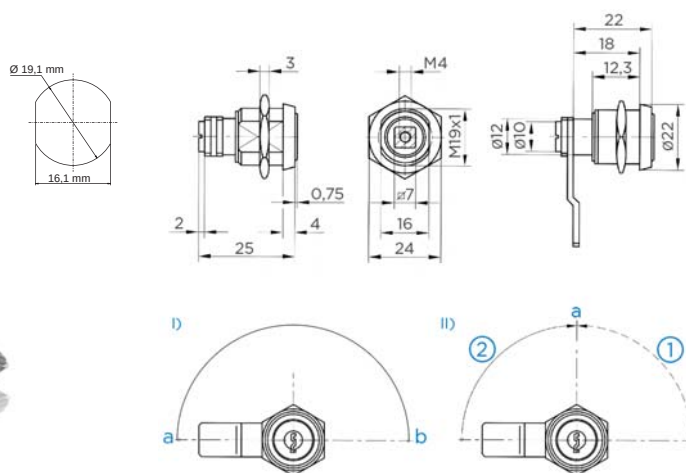

HR

SLO

EN

- bravica za manja metalna, plastična ili staklena vrata
- lamelarni mehanizam
- I) rotacija ključa i zasuna za 180°
ključ se vadi u poziciji "a" i "b"
- II) rotacija ključa i zasuna za 90°*
ključ se vadi samo u poziciji "a"
- 2 ključa, zasun** i matica
- šifra sirovog ključa: T12 L FeNi
- moguć sistem zaključavanja na isti ključ

* kod narudžbe navesti izvedbu lijevo (1) ili desno (2)
** po narudžbi drugi zasuni (str. 70. - 72.)


- ključavnica za majhna vrata iz pločevine, stekla in plastike
- lamelni mehanizem
- I) hod ključa in zapaha je 180°
ključ je mogoče izvleči v položaju "a" in "b"
- II) hod ključa in zapaha je 90°*
ključ je mogoče izvleči samo v položaju "a"
- 2 ključa, zapah** in matica
- koda surovca: T12 L FeNi
- možnost sistema zaklepanja na isti ključ

* pri naročilu je treba navesti levo (1) ali desno (2) izvedbo
** po želji se lahko dobavijo različni zapahi (str. 70. - 72.)

- cam lock for small doors made of metal, glass and plastic
- wafer cam lock - wafer tumbler mechanism
- I) rotation of the key and the cam for 180°
key can be pulled out in positions "a" and "b"
- II) turning angle of the key and cam is 90°*
key can be extracted only in position "a"
- 2 keys, cam** and nut
- blank key code: T12 L FeNi
- possible locking system Keyed alike

* by ordering of 90° please specify left (1) or right (2) version
** also other cams available (p. 70. - 72.)

KO-10

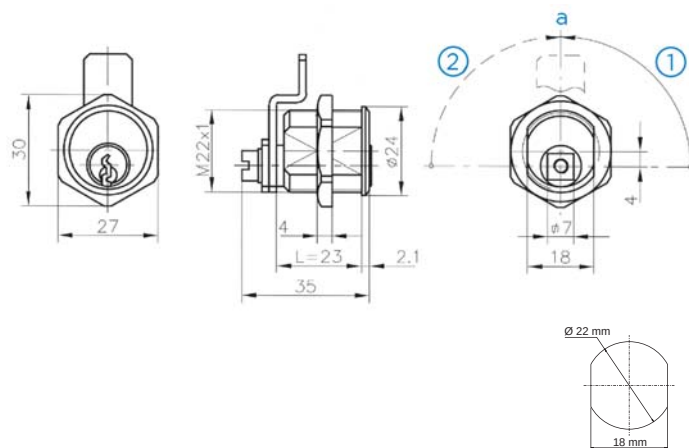

HR

SLO




EN

- bravica za metalna, plastična i staklena vrata (do 15 mm)
- cilindrični mehanizam
- rotacija ključa i zasuna za 90°
- ključ se vadi samo u poziciji "a"
- 2 ključa, zasun i matica
- moguća izrada sistema zaključavanja (na isti ključ, glavni ključ itd.)

- ključavnica za vrata iz pločevine, stekla ali plastike (do 15 mm)
- cilindrični mehanizem
- hod ključa in zapaha je 90°
- ključ je mogoče izvleči samo v položaju "a"
- 2 ključa, zapah in matica
- možnost sistema zaklepanja (na isti ključ, glavni ključ itd.)

- cam lock for doors made of metal, glass and plastic (up to 15 mm)
- cylinder cam lock - pin tumbler mechanism
- rotation of the key and cam for 90°
- key can be pulled out only in position "a"
- 2 keys, cam and nut
- possible master locking system (Keyed alike, Master key system etc.)

KO-10X



HR

- bravica za metalna, plastična i staklena vrata (do 15 mm)
- cilindrični mehanizam
- rotacija ključa i zasuna za 90°
- ključ se vadi u poziciji "a" i "b"
- 2 ključa, zasun i matica
- moguća izrada sistema zaključavanja (na isti ključ, glavni ključ itd.)





SLO

- ključavnica za vrata iz pločevine, stekla, lesa ali plastike (do 15 mm)
- cilindrični mehanizem
- hod ključa in zapaha je 90°
- ključ je mogoče izvleči samo v položaju "a" in "b"
- 2 ključa, zapah in matica
- možnost sistema zaklepanja (na isti ključ, glavni ključ itd.)

EN

- cam lock for doors made of metal, glass and plastic (up to 15 mm)
- cylinder cam lock - pin tumbler mechanism
- rotation of the key and cam for 90°
- key can be pulled out only in position "a" and "b"
- 2 keys, cam and nut
- possible master locking system (Keyed alike, Master key system etc.)

KO-11



HR

- bravica za metalna, staklena, drvena ili plastična vrata
- cilindrični mehanizam
- rotacija ključa i zasuna za 90°
- ključ se vadi samo u poziciji "a"
- 3 ključa, zasun, rozeta i matica
- moguća izrada sistema zaključavanja (na isti ključ, glavni ključ itd.)
- šifra sirovog ključa: K58 A profil


SLO

- ključavnica za vrata iz pločevine, stekla, lesa ali plastike
- cilindrični mehanizem
- hod ključa in zapaha je 90°
- ključ je mogoče izvleči samo v položaju "a"
- 3 ključa, zapah, rozeta in matica
- možnost sistema zaklepanja (na isti ključ, glavni ključ itd.)
- koda surovca: K58 A profil

EN

- cam lock for metallic, glass, wooden and plastic doors
- cylinder cam lock - pin tumbler mechanism
- rotation of the key and cam for 90°
- key can be pulled out only in position "a"
- 3 keys, cam, rosette and nut
- possible master locking system (Keyed alike, Master key system etc.)
- blank key code: K58 A profile

KO-13

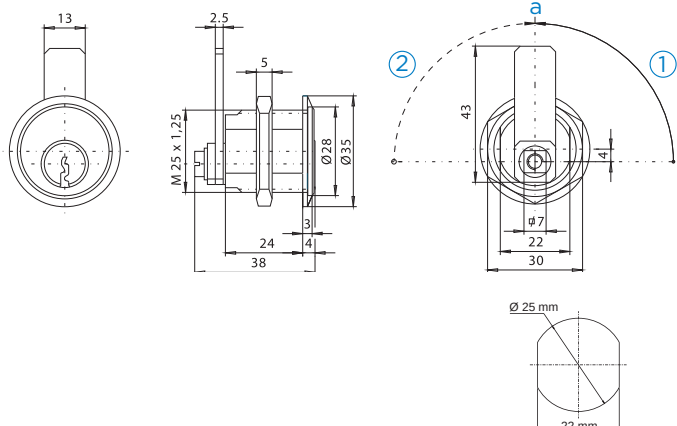

HR

- bravica za metalna, staklena, drvena ili plastična vrata
- cilindrični mehanizam
- rotacija ključa i zasuna za 90°
- ključ se vadi samo u poziciji "a"
- 3 ključa, zasun, rozeta i matica
- moguća izrada sistema zaključavanja (na isti ključ, glavni ključ itd.)
- šifra sirovog ključa: K58 A profil


SLO

- ključavnica za vrata iz pločevine, stekla, lesa ali plastike
- cilindrični mehanizem
- hod ključa in zapaha je 90°
- ključ je mogoče izvleči samo v položaju "a"
- 3 ključa, zapah, rozeta in matica
- možnost sistema zaklepanja (na isti ključ, glavni ključ itd.)
- koda surovca: K58 A profil

EN

- cam lock for metallic, glass, wooden and plastic doors
- cylinder cam lock - pin tumbler mechanism
- rotation of the key and cam for 90°
- key can be pulled out only in position "a"
- 3 keys, cam, rosette and nut
- possible master locking system (Keyed alike, Master key system etc.)
- blank key code: K58 A profile

EI-13

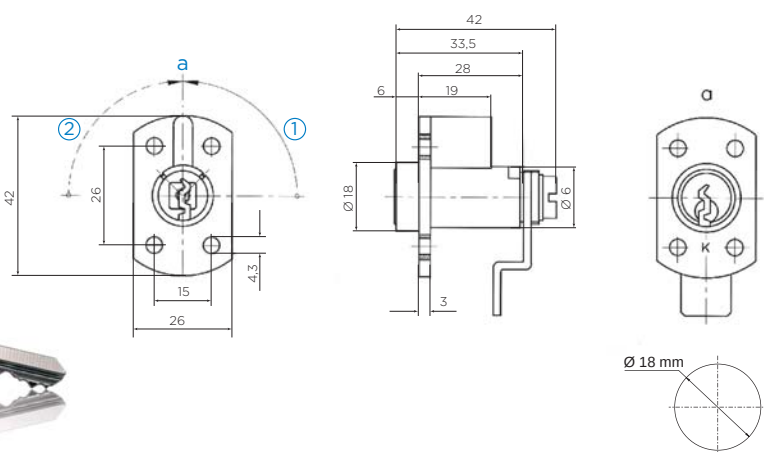

HR

- bravica za metalna, staklena ili plastična vrata do 6 mm
- cilindrični mehanizam
- rotacija ključa i zasuna za 90°
- ključ se vadi samo u poziciji "a"
- 2 ključa, zasun, štit i 4 vijci M4x10
- moguća izrada sistema zaključavanja (na isti ključ, glavni ključ itd.)
- šifra sirovog ključa: K58 A profil




SLO

- ključavnica za vrata iz pločevine, stekla ali plastike do 6 mm
- cilindrični mehanizem
- hod ključa in zapaha je 90°
- ključ je mogoče izvleči samo v položaju "a"
- 2 ključa, zapah, ščit in 4 vijaki M4x10
- možnost sistema zaklepanja (na isti ključ, glavni ključ itd.)
- koda surovca: K58 A profil

EN

- cam lock for metallic, glass and plastic doors up to 6 mm
- cylinder cam lock - pin tumbler mechanism
- rotation of the key and cam for 90°
- key can be pulled out only in position "a"
- 2 keys, cam, shield and 4 screw M4x10
- possible master locking system (Keyed alike, Master key system etc.)
- blank key code: K58 A profile

4900-03

L	E
9,5	X

X = molimo, nazovite nas za savjet
 X = prosimo, pokličite nas za nasvet
 X = please call us for advice

HR

SLO




EN

- za manja metalna, plastična ili staklena vrata
- lamelarni mehanizam
- I. rotacija ključa i zasuna za 90°
ključ se vadi samo u poziciji "a"
kod narudžbe navesti izvedbu 4900-05 za lijevo (1) ili 4900-03 za desno (2)
- II. rotacija ključa i zasuna za 180°
ključ se vadi u poziciji "a1" i "b1"
kod narudžbe navesti šifru 4900-01
- 2 ključa, zasun* i osigurač
- šifra sirovog ključa: SH-SM FeNi
- mogući sistemi zaključavanja - profil SM

- za majhna vrata iz pločevine, stekla ali plastike
- lamelni mehanizem
- I. hod ključa in zapaha je 90°
ključ je mogoče izvleči samo v položaju "a"
pri naročilu je treba navesti 4900-05 za levo (1) ali 4900-03 za desno (2) izvedbo
- II. hod ključa in zapaha je 180°
ključ je mogoče izvleči v položaju "a1" in "b1"
pri naročilu je treba navesti 4900-01
- 2 ključa, zapah* in matica
- koda surovca: SH-SM FeNi
- možnost sistema zaklepanja - profil SM

- for small doors made of metal, glass and plastic
- wafer cam lock - wafer tumbler mechanism
- I. turning angle of the key and cam is 90°
key can be extracted only in position "a"
by ordering of 90° please specify 4900-05 for left (1) or 4900-03 for right (2) version
- II. rotation of the key and the cam for 180°
key can be pulled out in positions "a1" and "b1"
by ordering specify 4900-01
- 2 keys, cam* and nut
- blank key code: SH-SM FeNi
- possible locking system in SM profile

16100-01

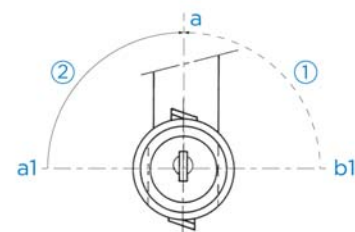HR

SLO






EN

- za metalne ormariće - **brza montaža**
- E = 0,6-1,2 / 1,4-2 / 3,2-3,8
- lamelarni mehanizam
- I. rotacija ključa i zasuna za 180°
ključ se vadi u poziciji "a1" i "b1"
kod narudžbe navesti šifru 16100-01
- II. rotacija ključa i zasuna za 90°
ključ se vadi samo u poziciji "a"
kod narudžbe navesti izvedbu 16100-05 za lijevo (1) ili 16100-02 za desno (2)
- 2 ključa i zasun*
- šifra sirovog ključa: SH-SM, TK-KT, CC FeNi
- mogući sistemi zaključavanja - profil SM, TK, KT, CC

- za majhna vrata iz pločevine - **hitra montaža**
- E = 0,6-1,2 / 1,4-2 / 3,2-3,8
- lamelni mehanizem
- I. hod ključa in zapaha je 180°
ključ je mogoče izvleči v položaju "a1" in "b1"
pri naročilu je treba navesti 16100-01
- II. hod ključa in zapaha je 90°
ključ je mogoče izvleči samo v položaju "a"
pri naročilu je treba navesti 16100-05 za levo (1) ali 16100-03 za desno (2) izvedbo
- 2 ključa, zapah* in matica
- koda surovca: SH-SM, TK-KT, CC FeNi
- možnost sistema zaklepanja na isti ključ - profil SM, TK, KT, CC

- for small doors made of metal - **fast mounting**
- E = 0,6-1,2 / 1,4-2 / 3,2-3,8
- wafer cam lock - wafer tumbler mechanism
- I. rotation of the key and the cam for 180°
key can be extracted only in position "a"
by ordering specify 16100-01
- II. turning angle of the key and cam is 90°
key can be extracted only in position "a"
by ordering of 90° please specify 16100-05 for left (1) or 16100-03 for right (2) version
- 2 keys and cam*
- blank key code: SH-SM, TK-KT, CC FeNi
- possible locking system in SM, TK, KT, CC profile

16400-04

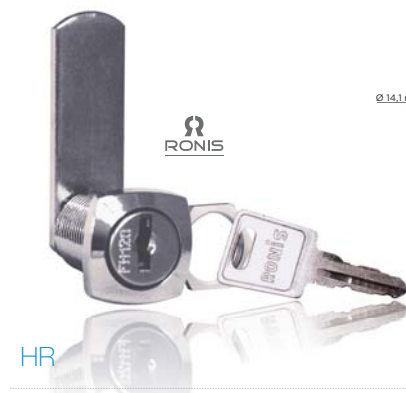

HR

- za metalna, plastična, drvena ili staklena vrata
- E = 3,5 - 14,5 mm
- lamelarni mehanizam
- I. rotacija ključa i zasuna za 180°
ključ se vadi u poziciji "a1" i "b1"
kod narudžbe navesti šifru 16400-04, L=18 mm
- II. rotacija ključa i zasuna za 90°
ključ se vadi samo u poziciji "a"
kod narudžbe navesti izvedbu 16400-05 za desno (2), L=15,5
- 2 ključa, zasun* i matica
- šifra sirovog ključa: SH-SM FeNi
- mogući sistemi zaključavanja - profil SM





SLO

- za vrata iz pločevine, stekla, lesa ali plastike
- E = 3,5 - 14,5 mm
- lamelni mehanizem
- I. hod ključa in zapaha je 180°
ključ je mogoče izvleči v položaju "a1" in "b1"
pri naročilu je treba navesti 16400-04, L=18 mm
- II. hod ključa in zapaha je 90°
ključ je mogoče izvleči samo v položaju "a"
pri naročilu je treba navesti 16400-05 za desno (2) izvedbo, L=15,5
- 2 ključa, zapah* in matica
- koda surovca: SH-SM FeNi
- možnost sistema zaklepanja na isti ključ - profil SM

EN

- for doors made of metal, glass, wood and plastic
- E = 3,5 - 14,5 mm
- wafer cam lock - wafer tumbler mechanism
- I. rotation of the key and the cam for 180°
key can be pulled out in positions "a1" and "b1"
by ordering specify 16400-04, L=18 mm
- II. turning angle of the key and cam is 90°
key can be extracted only in position "a"
by ordering of 90° please specify 16400-05 for right (2) version, L=15,5 mm
- 2 keys, cam* and nut
- blank key code: SH-SM FeNi
- possible locking system in SM profile

2800-01

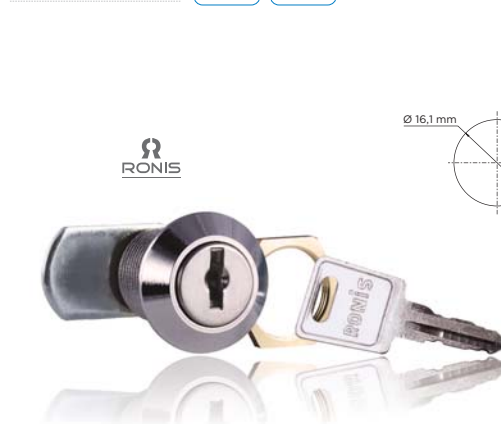

HR

- za metalna, plastična, drvena ili staklena vrata
- E = 3,5 - 10 mm
- lamelarni mehanizam
- rotacija ključa i zasuna za 180°
- ključ se vadi u poziciji "a1" i "b1"
- kod narudžbe navesti 2800-01, L=18 mm
- 2 ključa, zasun* i matica
- šifra sirovog ključa: SH-SM FeNi
- mogući sistemi zaključavanja - profil SM


SLO

- za vrata iz pločevine, stekla, lesa ali plastike
- E = 3,5 - 10 mm
- lamelni mehanizem
- hod ključa in zapaha je 180°
- ključ je mogoče izvleči v položaju "a1" in "b1"
- pri naročilu je treba navesti 28000-01, L=18 mm
- 2 ključa, zapah* in matica
- koda surovca: SH-SM FeNi
- možnost sistema zaklepanja na isti ključ - profil SM

EN

- for doors made of metal, glass, wood and plastic
- E = 3,5 - 10 mm
- wafer cam lock - wafer tumbler mechanism
- rotation of the key and the cam for 180°
- key can be pulled out in positions "a" and "b"
- by ordering specify 28000-01, L=18 mm
- 2 keys, cam* and nut
- blank key code: SH-SM FeNi
- possible locking system in SM profile

25300-03



HR

SLO

EN

- bravica za manja metalna, plastična, drvena ili staklena vrata (do 10 mm)
- lamelarni mehanizam
- I. rotacija ključa i zasuna za 90°
ključ se vadi u poziciji otključano i zaključano kod narudžbe navesti izvedbu 25300-03 za desno (2) ili 25300-02 za lijevo (1)
- II. rotacija ključa i zasuna za 180°
ključ se vadi u poziciji "a1" i "b1" kod narudžbe navesti šifru 25300-10
- 2 ključa, zasun* i matica
- šifra sirovog ključa: SH-SM, TK-KT, CC FeNi
- sistemi zaključavanja - profil SM, TK, KT, CC

- ključavnica za majhna vrata iz pločevine, stekla, lesa ali plastike (do 10 mm)
- lamelni mehanizem
- I. hod ključa in zapaha je 90°
ključ je mogoče izvleči v položaju odklenjeno in zaklenjeno pri naročilu je treba navesti 25300-03 za desno (2) izvedbo ali 25300-02 za levo (1) izvedbo
- II. hod ključa in zapaha je 180°
ključ je mogoče izvleči v položaju "a1" in "b1" pri naročilu je treba navesti 25300-10
- 2 ključa, zapah* in matica
- koda surovca: SH-SM, TK-KT, CC FeNi
- sistema zaklepanja - profil SM, TK-KT, CC

- cam lock for small doors made of metal, glass, wood and plastic (up to 10 mm)
- wafer cam lock - wafer tumbler mechanism
- I. turning angle of the key and cam is 90°
key can be extracted only in position locked and unlocked by ordering of 90° please specify 25300-03 for right (2) version or 25300-02 for left (1)
- II. rotation of the key and the cam for 180°
key can be pulled out in positions "a1" and "b1" by ordering specify 25300-10
- 2 keys, cam* and nut
- blank key code: SH-SM, TK-KT, CC FeNi
- locking system in SM, TK, KT, CC profiles

26200-01



HR

SLO


EN

- bravica za manja metalna, plastična, drvena ili staklena vrata (do 21 mm)
- lamelarni mehanizam
- rotacija ključa i zasuna za 90°
- ključ se vadi samo u poziciji zaključano
- kod narudžbe navesti izvedbu 26200-01 za desno (2)
- 2 ključa, zasun* i matica
- šifra sirovog ključa: TK-KT FeNi,
- mogući sistemi zaključavanja - profil TK, KT

- ključavnica za majhna vrata iz pločevine, stekla, lesa ali plastike (do 21 mm)
- lamelni mehanizem
- hod ključa in zapaha je 90°
- ključ je mogoče izvleči v položaju zaklenjeno
- pri naročilu je treba navesti 26200-01 za desno (2) izvedbo
- 2 ključa, zapah* in matica
- koda surovca: TK-KT FeNi
- možnost sistema zaklepanja - profil TK-KT

- cam lock for small doors made of metal, glass, wood and plastic (up to 21 mm)
- wafer cam lock - wafer tumbler mechanism
- turning angle of the key and cam is 90°
- key can be extracted in position locked
- by ordering of 90° please specify 26200-01 for right (2) version
- 2 keys, cam* and nut
- blank key code: TK-KT FeNi
- possible locking system in TK, KT profiles

22500-01

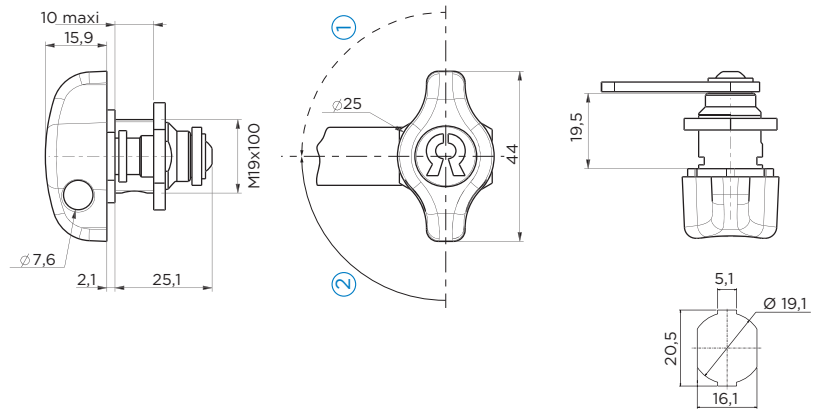

HR

- bravica za manja metalna, plastična, drvena ili staklena vrata (do 10 mm)
- za lokot 842/25 i 842/35
- rotacija ručice i zasuna za 90°
- kod narudžbe navesti izvedbu 22500-02 za desno (2) ili 22500-01 za lijevo (1)
- zasun* i matica
- mogući sistemi zaključavanja na temelju lokota 842/25 i 842/35


SLO

- ključavnica za majhna vrata iz pločevine, stekla, lesa ali plastike (do 10 mm)
- za obešanko 842/25 in 842/35
- hod ročice in zapaha je 90°
- pri naročilu je treba navesti 22500-02 za desno (2) izvedbo ali 22500-01 za levo (1) izvedbo
- zapah* in matica
- možnost sistema zaklepanja na obešanko 842/25 i 842/35

EN

- cam lock for small doors made of metal, glass, wood and plastic (up to 10 mm)
- for padlock 842/25 and 842/35
- turning angle of the handle and cam is 90°
- by ordering of 90° please specify 22500-02 for right (2) version or 22500-01 for left (1)
- cam* and nut
- possible locking system with padlocks 842/25 and 842/35

382

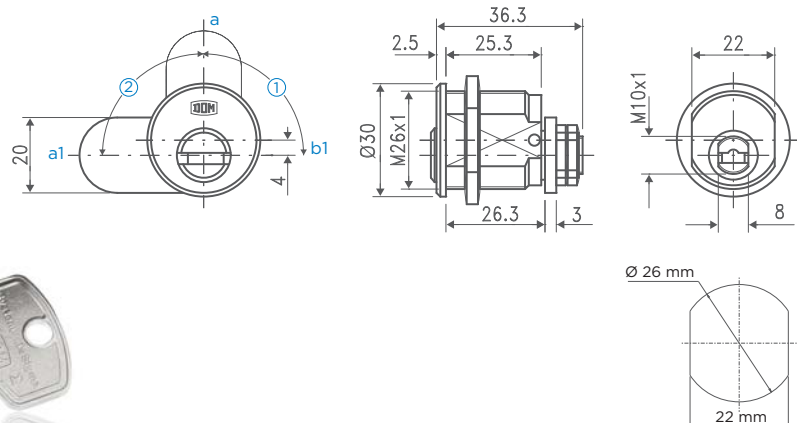

HR

- bravica za metalna, staklena, drvena ili plastična vrata
- cilindrični mehanizam (Sigma Plus, ix DAS, ix Gamma, ix 6 SR, ix Saturn, diamant)
- rotacija ključa i zasuna za 90°
- ključ se vadi samo u poziciji "a"; na zahtjev se isporučuje opcija da se ključ vadi u poziciji otključano i zaključano
- kod narudžbe navesti izvedbu lijevu (1) ili desnu (2)
- 3 ključa, zasun (20.00.13 F013), rozeta i matica
- moguća izrada sistema zaključavanja




SLO

- ključavnica za vrata iz pločevine, stekla, lesa ali plastike
- cilindrični mehanizem (Sigma Plus, ix DAS, ix Gamma, ix 6 SR, ix Saturn, diamant)
- hod ključa in zapaha je 90°
- ključ je mogoče izvleči samo v položaju "a", na zahtevo je možna opcija za izvek ključa v zaklenjenem in odklenjenem položaju
- pri naročilu navesti levo (1) ali desno (2) izvedbo
- 3 ključa, zapah (200013F013), rozeta in matica
- možnost zaklepnega sistema

EN

- for metallic, glass, wooden and plastic doors
- cylinder cam lock - pin tumbler mechanism (Sigma Plus, ix DAS, ix Gamma, ix 6 SR, ix Saturn, diamant)
- key and cam rotation - 90°
- key can be pulled out only in position "a"; special type: key can be withdrawn in two positions
- by ordering specify left (1) or right (2) option
- 3 keys, cam (200013F013), rosette and nut
- possible master locking system

18800-03/1



HR

SLO





EN

- bravica za namještaj (do 22 mm)
- lamelarni pumpa mehanizam
- ključ se vadi u poziciji zaključano
- 2 ključa i rozeta
- šifra sirovog ključa: SH-SM FeNi
- mogući sistemi zaključavanja - profil SM

- ključavnica za pohištvo (do 22 mm)
- lamelni potisni mehanizem
- ključ je mogoče izvleči samo v položaju zaklenjeno
- 2 ključa in rozeta
- koda surovca: SH-SM FeNi
- možnost sistema zaklepanja - profil SM

- furniture lock (up to 22 mm)
- wafer push lock - wafer push tumbler mechanism
- key can be extracted only in position locked
- 2 keys, cam and nut
- blank key code: SH-SM FeNi
- possible locking system in SM profile

4600-01



HR

SLO


EN

- bravica za garažna vrata (1,5 - 2 mm)
- lamelarni mehanizam
- ključ se vadi samo u poziciji zaključano
- 2 ključa, zasun i matica
- šifra sirovog ključa: SH-SM, TK-KT FeNi,
- mogući sistemi zaključavanja - profil SM, TK, KT

- ključavnica za garažna vrata (1,5 - 2 mm)
- lamelni mehanizem
- ključ se izvleče samo v položaju zaklenjeno
- 2 ključa, zapah in matica
- koda surovca: SH-SM, TK-KT FeNi
- možnost sistema zaklepanja - profil SM, TK, KT

- garage lock (1,5 - 2 mm)
- wafer cam lock - wafer tumbler mechanism
- key can be extracted only in position locked
- 2 keys, cam and nut
- blank key code: SH-SM, TK-KT FeNi
- possible locking system in SM, TK, KT profiles

23500-01



HR


- za metalne ormariće (0,8 - 1 mm)
- **brza montaža** (bez osigurača ili matice)
- lamelarni mehanizam
- rotacija ključa i zasuna za 90°
- ključ se vadi samo u poziciji zaključano
- kod narudžbe navesti izvedbu 23500-02 za desno (2) ili 23500-01 za lijevo (1)
- 2 ključa i zasun*
- šifra sirovog ključa: SH-SM, TK-KT FeNi
- mogući sistemi zaključavanja - profil SM, TK, KT

SLO


- za majhna vrata iz pločevine (0,8 - 1 mm)
- **hitra pritrditev**
- lamelni mehanizem
- hod ključa in zapaha je 90°
- ključ je mogoče izvleči samo v položaju zaklenjeno
- pri naročilu je treba navesti 23500-02 za desno (2) izvedbo ali 23500-01 za levo (1) izvedbo
- 2 ključa in zapah*
- koda surovca: SH-SM, TK-KT FeNi
- možnost sistema zaklepanja - profil SM, TK-KT

EN

- for metal doors (0,8 - 1 mm)
- **fast mounting** (without safety clip or nut)
- wafer locker lock - wafer tumbler mechanism
- turning angle of the key and cam is 90°
- key can be extracted only in position locked
- by ordering of 90° please specify 23500-02 for right (2) version or 23500-01 for left (1)
- 2 keys and cam*
- blank key code: SH-SM, TK-KT FeNi
- possible locking system in SM, TK, KT profiles

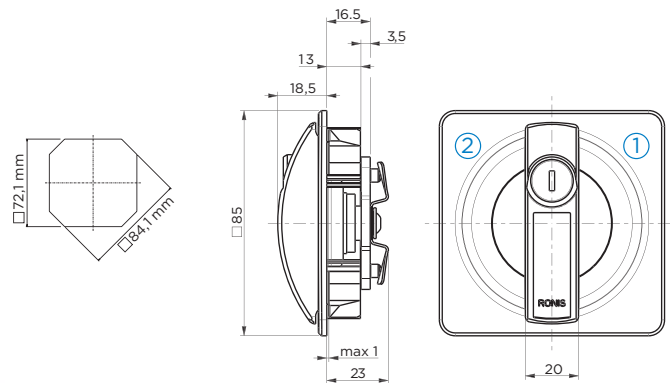

SKK1

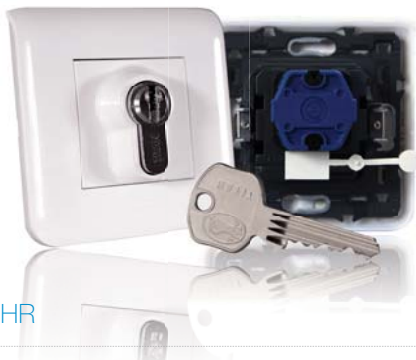

HR


- štedna kontrolna sklopka – prekidač
- preko polucilindra 10x30 se uključuje i isključuje strujni krug
- ključ se okreće za 90°
- ključ se vadi samo u poziciji kad je isključen strujni krug (ugašeno)
- dva položaja (2 pola), 6 A, 2M, 250 V, 50/60 Hz
- maksimalni kapacitet 750 W, 250 V – 48 V DC 3 A
- montaža preko nosača 2M s pandžama za Ø 60 mm; modularni mehanizam preko adaptera omogućuje nadgradbenu i ugradbenu montažu
- u setu polucilindar TITAN TL, ostali na upit

SLO


- varčevalo energije – kontrolno stikalo
- odpiranje in zapiranje tokokroga z obračanjem ključa polcilindra 10x30
- kot obračanja je 90°
- ključ je mogoče izvleči samo v zaklenjenem položaju (napetost izključena)
- 2-poziciji (2 pola), 6A, 2M, 250V, 50/60 Hz
- Max. moč 750W, 250 V – 48 VDC 3A
- Pritrditev: s pomočjo pritdil v dozo 60 ali s pomočjo adapterja
- V setu je polcilinder TITAN TL, ostali na zahtevo

EN

- energy saver – control switch
- opening and closing circuits with turning key on euro profile half-cylinder 10x30
- turning angle of the key is 90°
- key can be extracted only in position closed circuits (power turn off)
- 2-position (2 pole), 6 A, 2M, 250 V, 50/60 Hz
- max. power capacity kapacitet 750 W, 250 V – 48 V DC 3 A
- fixing method: with clips for Ø 60 mm; surface-mounted or flush-mounted using adapters of modular mechanism
- comes with half-cylinder TITAN TL, other on request

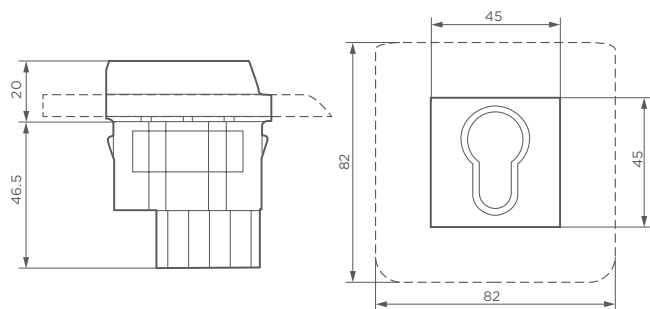

Zasuni | Zapahi | Cams



HR	SLO	EN	ŠIFRA KODA CODE	d	b	a	L
1. zasun ravni A20	zapah raven A20	leveled cam A20	T042509113	2,5			20
2. zasun ravni A38	zapah raven A38	leveled cam A38	T042509084	2,5			38
3. zasun ravni B43	zapah raven B43	leveled cam B43	T042509082	2,5			43
4. zasun ravni C50	zapah raven C50	leveled cam C50	T042509083	2,5			50
5. zasun ravni D56	zapah raven D56	leveled cam D56	T042509086	2,5			56
6. zasun ravni, konus E42	zapah raven, konus E42	leveled cam, taper E42	T042509089	3			42
7. zasun ravni, radijus F69,5	zapah raven, radij F69,5	leveled cam, radius F69,5	T042509090	2,5			69,5
8. zasun ravni, radijus F56,5	zapah raven, radij F56,5	leveled cam, radius F56,5	T042509260	2,5			56,5
9. zasun zakrivljeni G36,5	zapah zakrivljen G36,5	curved cam G36,5	T042509145	2,5	2,5	16	36,5
10. zasun zakrivljeni G70,5	zapah zakrivljen G70,5	curved cam G70,5	T042509155	2,5	3,5	16	70,5
11. zasun zakrivljeni H48,5	zapah zakrivljen H48,5	curved cam H48,5	T042509066	2,5	2,5	16	48,5
12. zasun zakrivljeni I38	zapah zakrivljen I38	curved cam I38	T042509067	2,5	7,5	16	38
13. zasun zakrivljeni J48,5	zapah zakrivljen J48,5	curved cam J48,5	T042509068	2,5	7,5	16	48,5
14. zasun zakrivljeni K36	zapah zakrivljen K36	curved cam K36	T042509075	2,5	9,5	16	36
15. zasun zakrivljeni L38,5	zapah zakrivljen L38,5	curved cam L38,5	T042509070	2,5	12,5	9	38,5
16. zasun zakrivljeni, radijus M49,5	zapah zakrivljen, radij M49,5	curved cam, radius M49,5	T042509261	2,5	9,5	7,5	49,5
17. zasun zakrivljeni, radijus N49,5	zapah zakrivljen radij, N49,5	curved cam, radius N49,5	T042509262	2,5	9,5	7,5	49,5
18. zasun zakrivljeni, kuka R46	zapah zakrivljen, kljuka R46	curved cam, hook R46	T042509263	2,5	9,5	7,5	46

HR

SLO


EN

! Kod RONIS bravica standardni zasuni su kao na slici artikla. Druge opcije na upit.


! Pri ključavnicah RONIS so standardni zapahi isti kot na sliki artikla. Drugačni zapahi so možni po posebnem naročilu.

! RONIS cam locks have cam as shown on picture. Other options on request.


1.-5.




6.




7.,8.




9.-15.




16.



17.




18.

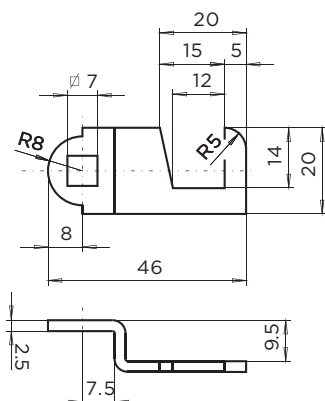

Pozicije zasuna debljine 2,5 mm

Lega zapahov debljine 2,5 mm


Position of the cams, thickness 2,5

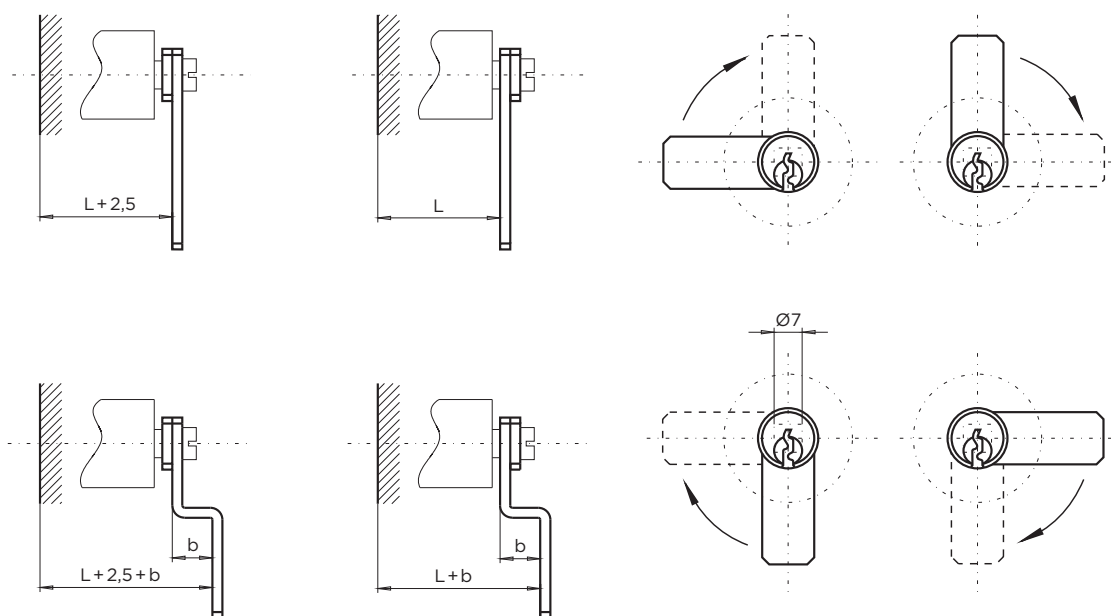

Pozicije zasuna KV-7

Varianta zapaha KV-7


Options of the cam positions KV-7

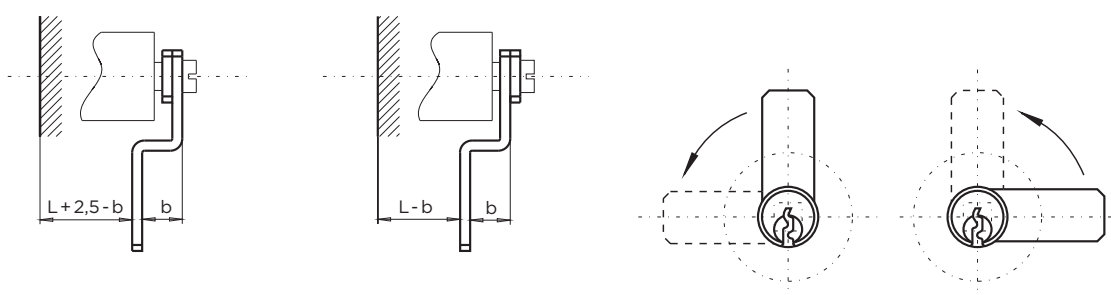

Zasun u odnosu na poziciju cilindra KO-10

Varianta zapaha glede na lego cilindra KO-10

Bold option respectively the position of the cylinder KO-10

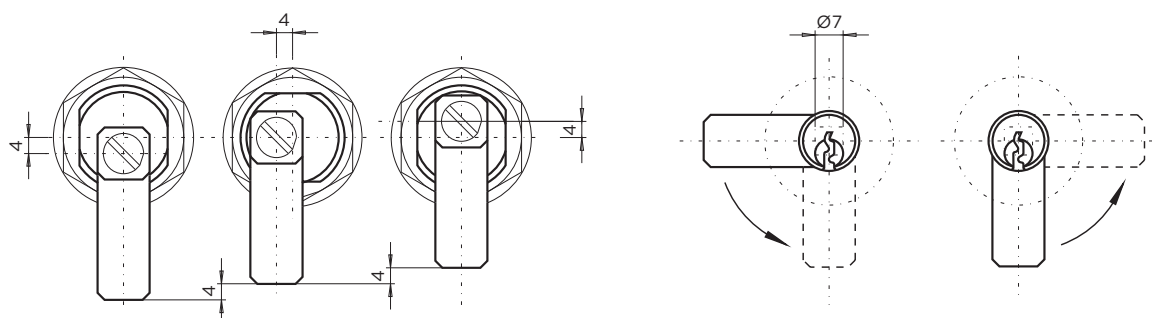




BRAVE ZA DRVENA VRATA
VDOLBNE KLJUČAVNICE
MORTISE LOCKS

801/40-90 (801/6,5*)



na ključ
operated by key

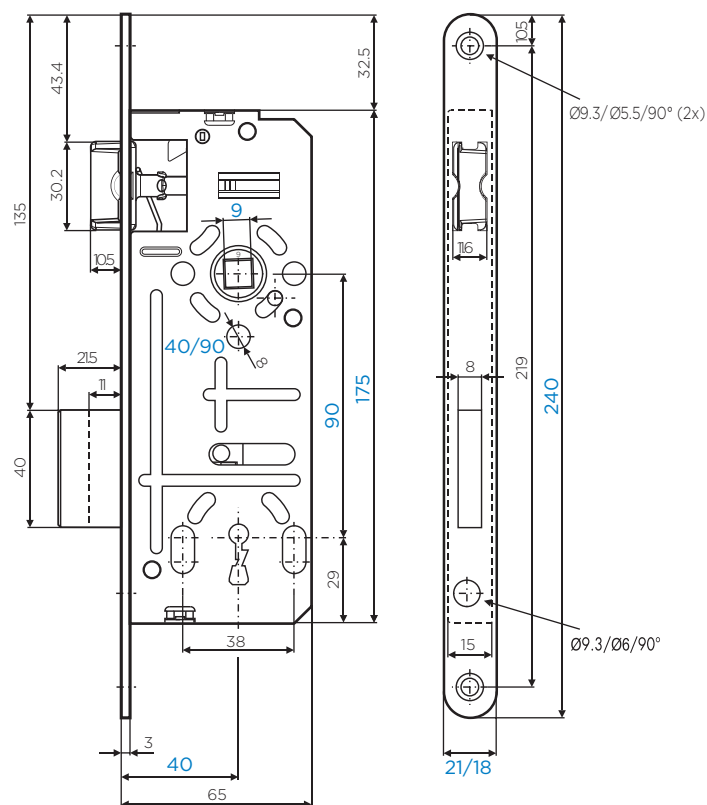

HR

- FUNKCIJA:
 - univerzalna lijevo/desno
 - za unutarnja vrata do 60 kg
 - dva okretaja ključa
- ČEONA PLOČA:
 - čelik, obrada bojano ili galvanizirano
 - standardno 18 mm
- TIJELO: čelik, zaštićeno od korozije
- JEZIČAK I ZASUN: metalni - cinkova legura
- TEHNIČKE INFORMACIJE:
 - standard 90 mm
 - dubina do centra ključa 40 mm
- PAKIRANJE:
 - industrijsko - brava s ključem (bez prihvata i vijaka)
 - trgovačko - brava s ključem, prihvatnikom i vijcima u skinu

SLO

- FUNKCIJA:
 - univerzalna, levo - desna
 - za notranja vrata do 60 kg
 - dvojni zaklep
- ČELNICA:
 - jeklo, barvano ali cinkano
 - standard 18 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- VPAD IN ZAPAH: iz kovine (cinkova zlitina)
- TEHNIČNE INFORMACIJE:
 - standard 90 mm
 - razdalja do ključa 40 mm
- PAKIRANJE:
 - industrijsko - ključavnica s ključem (bez prijemnika in vijakov)
 - trgovsko - ključavnica s ključem, prijemnikom in vijaki v skinu

EN


- FUNCTION:
 - universal, left - right
 - for inner door of up to 60 kg
 - deadbolt double throw
- FOREND:
 - steel, finish protection with colour or galvanisation
 - standard 18 mm
- CASING: steel - protected against corrosion
- LATCH AND DEADBOLT: made of metal - zinc alloy
- TECHNICAL INFORMATION:
 - standard 90 mm
 - distance to key 40 mm
- PACKAGING:
 - industrial - lock with key (without forend and screws)
 - commercial - lock with forend and screws in skin pack

* stara šifra stara koda previous code

801/50-90 (801/8*)



na ključ
operated by key

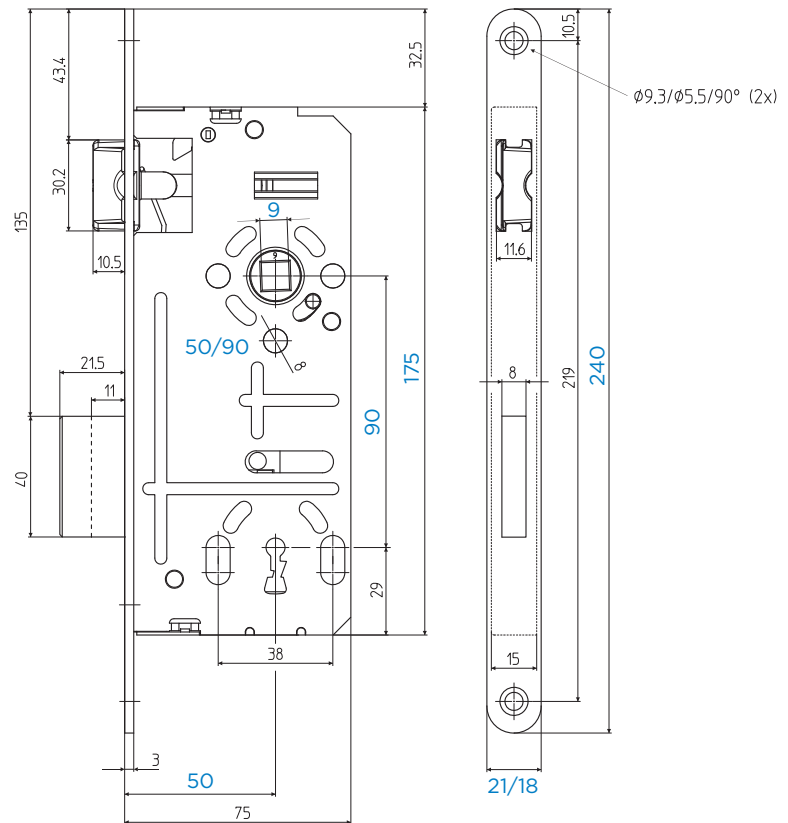

HR

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - za unutarnja vrata do 60 kg
 - dva okretaja ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 21 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - standard 90 mm
 - dubina do centra ključa 50 mm
- **PAKIRANJE:**
 - industrijsko - brava s ključem (bez prihvataka i vijaka)
 - trgovačko - brava s ključem, prihvatnikom i vijcima u skinu

SLO

- **FUNKCIJA:**
 - univerzalna, levo - desna
 - za notranja vrata do 60 kg
 - dvojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 21 mm
- **OHIŠJE:** jeklo - zaštićeno proti koroziji
- **VPAD IN ZAPAH:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - standard 90 mm
 - razdalja do ključa 50 mm
- **PAKIRANJE:**
 - industrijsko - ključavnica s ključem (brez prijemnika in vijakov)
 - trgovsko - ključavnica s ključem, prijemnikom in vijaki v skinu

EN

- **FUNCTION:**
 - universal, left - right
 - for inner door of up to 60 kg
 - deadbolt double throw
- **FOREND:**
 - steel, finish protection with colour or galvanisation
 - standard 21 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - standard 90 mm
 - distance to key 50 mm
- **PACKAGING:**
 - industrial - lock with key (without forend and screws)
 - commercial - lock with forend and screws in skin pack


* stara šifra **stara koda** previous code

802/40-90 (802/6,5*)

bešumna brava
tiha ključavnica
silent door lock



na ključ
operated by key

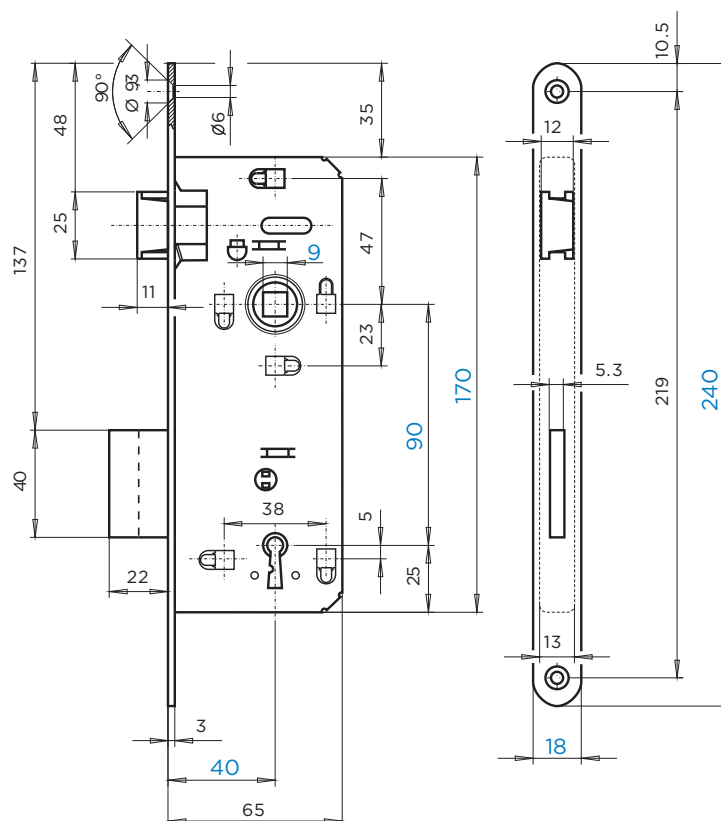

HR

SLO

EN


- **FUNKCIJA:**
 - lijevo ili desno
 - za unutarnja vrata do 40 kg
 - dva okretaja ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 18 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:** tvrda plastika (tiše zatvaranje)
- **TEHNIČKE INFORMACIJE:**
 - standard 90 mm
 - dubina do centra ključa 40 mm
- **PAKIRANJE:**
 - industrijsko - brava s ključem (bez prihvata i vijaka)
 - trgovačko - brava s ključem, prihvatom i vijcima u skinu

- **FUNKCIJA:**
 - leva ali desna
 - za notranja vrata do 40 kg
 - dvojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 18 mm
- **OHIŠJE:** jeklo - zaštićeno proti koroziji
- **VPAD IN ZAPAH:** iz plastike - POM (tišje zapiranje)
- **TEHNIČNE INFORMACIJE:**
 - standard 90 mm
 - razdalja do ključa 40 mm
- **PAKIRANJE:**
 - industrijsko - ključavnica s ključem (brez prijemnika in vijakov)
 - trgovsko - ključavnica s ključem, prijemnikom in vijaki v skinu


- **FUNCTION:**
 - left or right
 - for inner door of up to 40 kg
 - deadbolt double throw
- **FOREND:**
 - steel, finish protection with colour or galvanisation
 - standard 18 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:** Plastics - pom (less noise)
- **TECHICAL INFORMATION:**
 - standard 90 mm
 - distance to key 40 mm
- **PACKAGING:**
 - industrial - lock with key (without forend and screws)
 - commercial - lock with forend and screws in skin pack

* stara šifra **stara koda** previous code

401/55-72

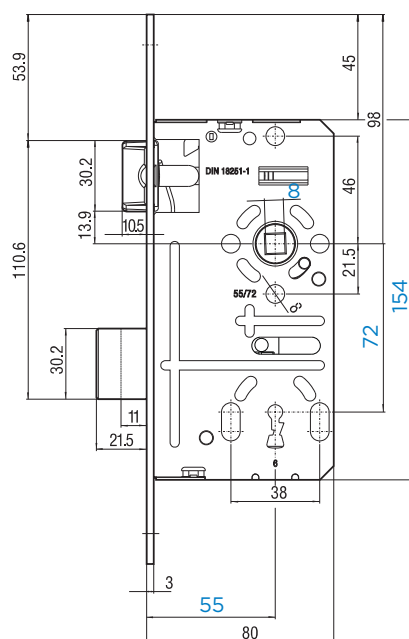

na ključ
operated by key

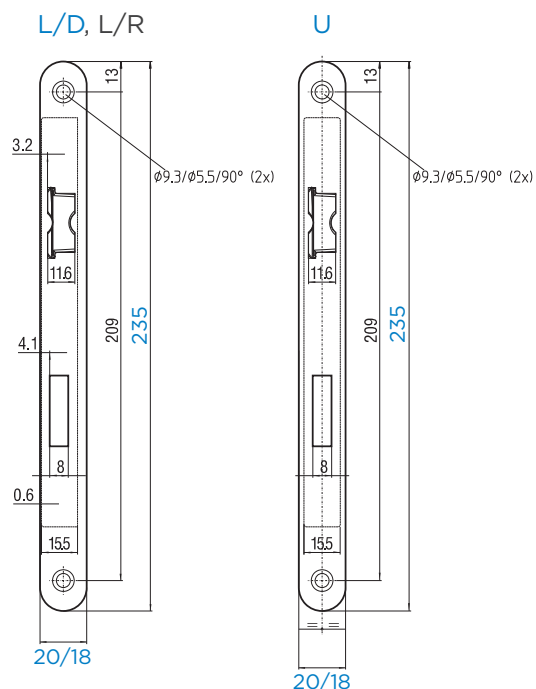

HR

- **FUNKCIJA:**
 - univerzalna ili posebno lijevo/desno po DIN 18251-1
 - za unutarnja vrata do 60 kg
 - dva okretaja ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 20 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - standard 72 mm
 - dubina do centra ključa 55 mm
- **PAKIRANJE:** trgovačko - brava s ključem, prihvatom i vijcima u skinu

SLO

- **FUNKCIJA:**
 - univerzalna ali levo - desna ustreza: DIN 18251-1
 - za notranja vrata do 60 kg
 - dvojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 20 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VPAD IN ZAPAH:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - standard 72 mm
 - razdalja do ključa 55 mm
- **PAKIRANJE:** trgovsko - ključavnica s ključem, prijemnikom in vijaki v skrinu

EN


- **FUNCTION:**
 - universal or left - right corresponds to DIN 18251-1
 - for inner door of up to 60 kg
 - deadbolt double throw
- **FOREND:**
 - steel, finish protection with colour or galvanisation
 - standard 20 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - standard 72 mm
 - distance to key 55 mm
- **PACKAGING:** commercial - lock with forend and screws in skin pack

402/55-72


bešumna brava
tiha ključavnica
silent door lock




na ključ
operated by key

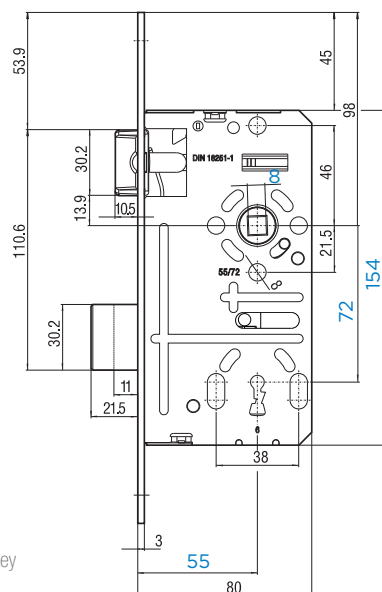

L/D, L/R

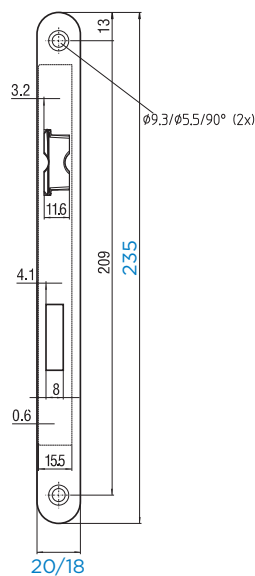

U

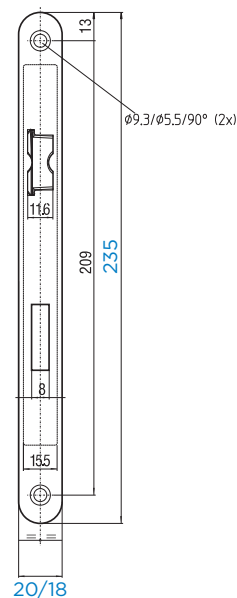

HR

- **FUNKCIJA:**
 - univerzalna ili posebno lijevo/desno po DIN 18251-1
 - za unutarnja vrata do 40 kg
 - dva okretaja ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 20 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:** tvrda plastika (tiše zatvaranje)
- **TEHNIČKE INFORMACIJE:**
 - standard 72 mm
 - dubina do centra ključa 55 mm
- **PAKIRANJE:** trgovačko - brava s ključem, prihvatom i vijcima u skinu

SLO


- **FUNKCIJA:**
 - univerzalna ali levo - desna ustreza: DIN 18251-1
 - za notranja vrata do 40 kg
 - dvojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 20 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VPAD IN ZAPAH:** iz plastike - POM (tišje zapiranje)
- **TEHNIČNE INFORMACIJE:**
 - standard 72 mm
 - razdalja do ključa 55 mm
- **PAKIRANJE:** trgovsko - ključavnica s ključem, prijemnikom in vijaki v skinu

EN


- **FUNCTION:**
 - universal or left - right corresponds to DIN 18251-1
 - for inner door of up to 40 kg
 - deadbolt double throw
- **FOREND:**
 - steel, finish protection with colour or galvanisation
 - standard 20 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:** Plastics - pom
- **TECHICAL INFORMATION:**
 - standard 72 mm
 - distance to key 55 mm
- **PACKAGING:** commercial - lock with forend and screws in skin pack

KOLIBER-M BB 72/55 SP

magnetna bešumna brava
magnetna tiha ključavnica
magnetic silent door lock

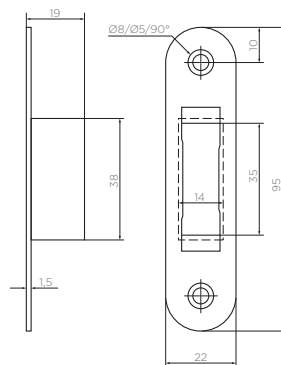

na ključ
operated by key

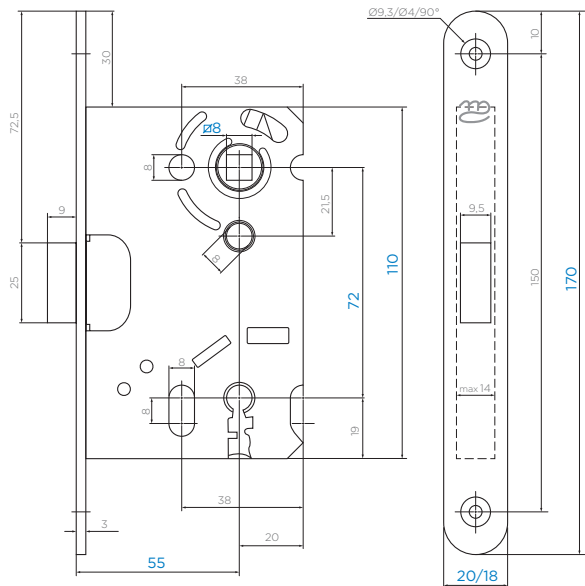

OBRADA OBDELAVA FINISH



HR

- FUNKCIJA:
 - univerzalna
 - za unutarnja vrata do 40 kg
 - dva okretaja ključa
 - razmak između vrata i okvira 2 - 5 mm
 - prihvatnik s magnetom nema regulaciju
 - za vrata bez utora ili s utorom
 - koristiti kvake s oprugom
- ČEONA PLOČA:
 - čelik, obrada inox
 - standardno 20 mm
- TIJELO: čelik, zaštićeno od korozije
- ZASUN: tvrda plastika (tiše zatvaranje)
- TEHNIČKE INFORMACIJE:
 - standard 72 mm
 - dubina do ključa 55 mm
- PAKIRANJE: trgovačko - brava s ključem, prihvatnikom i vijcima u kutiji


SLO

- FUNKCIJA:
 - univerzalna
 - za notranja vrata do 40 kg
 - dvojni zaklep
 - razmak med vrati in okvirom 2 - 5 mm
 - prijemnik z magnetom brez regulacije globine
 - za vrata z ravnim in profilnim čelnim robom
 - uporabiti kljuko z vzmetjo
- ČELNICA:
 - jeklo, inox
 - standard 20 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- ZAPAH: iz plastike - POM (tiše zapiranje)
- TEHNIČNE INFORMACIJE:
 - standard 72 mm
 - razdalja do ključa 55 mm
- PAKIRANJE: trgovsko - ključavnica s ključem, prijemnikom in vijaki v kartonski embalaži

EN

- FUNCTION:
 - universal
 - for inner door up to 40 kg
 - deadbolt double throw
 - distance between door and frame 2 - 5 mm
 - striker plate with magnet without depth regulation
 - for flush (non-rebated) and rebated doors
 - use door handle with springs
- FOREND:
 - stainless steel
 - standard 20 mm
- CASING: steel - protected against corrosion
- DEADBOLT: Plastics - pom
- TECHNICAL INFORMATION:
 - standard 72 mm
 - distance to key 55 mm
- PACKAGING: commercial - lock with key forend and screws in cardboard

Ključevi | Ključići | Keys

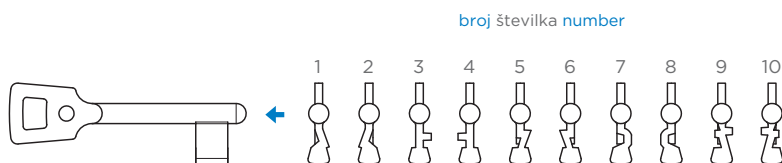

HR


- MATERIJAL: cinkova legura
- UPORABA: za brave 801/40-90, 801/50-90, 802/40-90, 401/55-72, 402/55-72
- POVRŠINSKA ZAŠTITA: Ni

SLO

- MATERIAL: cinkova zlitina
- UPORABA: za ključavnico 801/40-90, 801/50-90, 802/40-90, 401/55-72, 402/55-72
- POVRŠINSKA ZAŠČITA: Ni

EN

- MATERIAL: Zinc alloy
- APPLICATION: for locks 801/40-90, 801/50-90, 802/40-90, 401/55-72, 402/55-72
- SURFACE PROTECTION: Ni

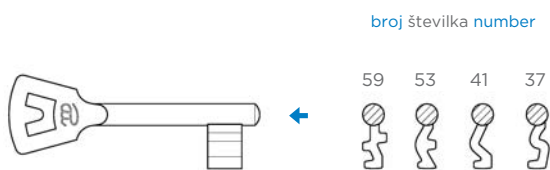

HR

- MATERIJAL: cinkova legura
- UPORABA: za bravu KOLIBER-M BB 72/55 SP
- POVRŠINSKA ZAŠTITA: Ni

SLO

- MATERIAL: cinkova zlitina
- UPORABA: za ključavnico KOLIBER-M BB 72/55 SP
- POVRŠINSKA ZAŠČITA: Ni


EN

- MATERIAL: Zinc alloy
- APPLICATION: for lock KOLIBER-M BB 72/55 SP
- SURFACE PROTECTION: Ni

529/40 (529/6,5*)



samo na kvaku
on door handle only

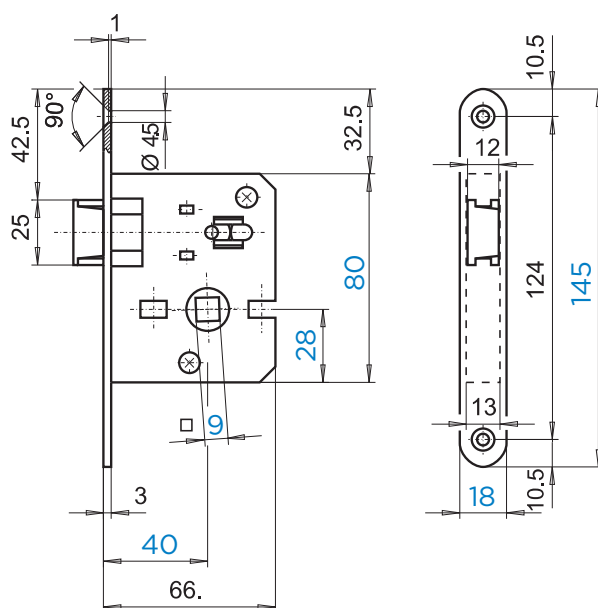

HR

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - za unutarnja vrata do 60 kg
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - 18 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - samo na kvaku
 - dubina do centra trna kvake 40 mm
- **PAKIRANJE:** trgovačko - brava s prihvatom i vijcima u skinu

SLO


- **FUNKCIJA:**
 - univerzalna levo - desna
 - za notranja vrata do 60 kg
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - 18 mm
- **OHIŠJE:** jeklo - zaštićeno proti koroziji
- **VPAD:** iz kovine (cinkova zlitina)
- **TEHNIČKE INFORMACIJE:**
 - samo za kljuko
 - razdalja do kljuke 40 mm
- **PAKIRANJE:** trgovsko - ključavnica s prijemnikom in vijaki v skinu

EN

- **FUNCTION:**
 - universal left - right
 - for inner door of up to 60 kg
- **FOREND:**
 - steel, finish protection with colour or galvanisation
 - 18 mm
- **CASING:** steel - protected against corrosion
- **LATCH:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - only for door handle
 - distance to square spanner 40 mm
- **PACKAGING:** commercial - lock with forend and screws in skin pack

* stara šifra [stara koda](#) previous code

811/40-90 bez podizača | brez vzvoda | without lever (809/6,5*)

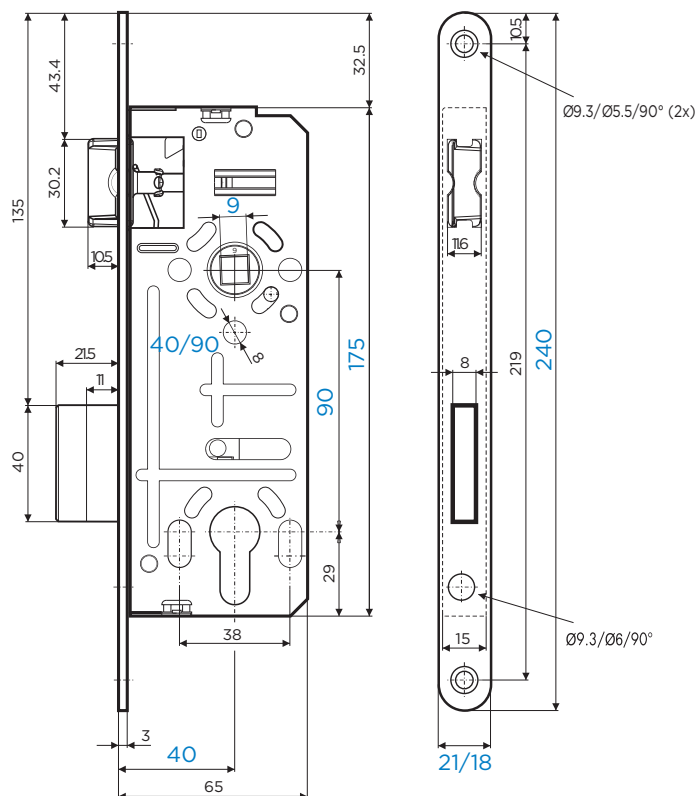za cilindar
for profile cylinder

HR

- FUNKCIJA:
 - univerzalna lijevo/desno
 - bez podizača - jezičak se ne uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - dva okretaja ključa
- ČEONA PLOČA:
 - čelik, obrada bojano ili galvanizirano
 - standardno 18 mm
- TIJELO: čelik, zaštićeno od korozije
- JEZIČAK I ZASUN: metalni - cinkova legura
- TEHNIČKE INFORMACIJE:
 - standard 90 mm
 - dubina do centra ključa 40 mm
- PAKIRANJE:
 - industrijsko - brava (bez prihvataka i vijaka)
 - trgovačko - brava s prihvatnikom i vijcima u skinu
- Koristiti samo cilindar s prstenom 7,5 x 5 mm TITAN (JUS)

SLO

- FUNKCIJA:
 - univerzalna, levo - desna
 - brez vzvoda
 - za vhodna in notranja vrata do 60 kg
 - dvojni zaklep
- ČELNICA:
 - jeklo, barvano ili cinčano
 - standard 18 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- VPAD IN ZAPAH: iz kovine (cinkova zlitina)
- TEHNIČNE INFORMACIJE:
 - standard 90 mm
 - razdalja do cilindra 40 mm
- PAKIRANJE:
 - industrijsko - ključavnica (brez prijemnika in vijakov)
 - trgovsko - ključavnica, prijemnik in vijaki v skinu
- Uporabiti le cilindar s prstanom 7,5 x 5 mm TITAN (JUS)

EN



- FUNCTION:
 - universal, left - right
 - without lever - the latch can not be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt double throw
- FOREND:
 - steel, finish protection with colour or galvanisation
 - standard 18 mm
- CASING: steel - protected against corrosion
- LATCH AND DEADBOLT: made of metal - zinc alloy
- TECHICAL INFORMATION:
 - standard 90 mm
 - distance to cylinder 40 mm
- PACKAGING:
 - industrial - lock (without forend and screws)
 - commercial - lock with forend and screws in skin pack
- Use only the cylinder with a cam 7,5 x 5mm TITAN

* stara šifra stara koda previous code

811/40-90 s podizačem | z vzvodom | with lever (811/6,5*)



za cilindar
for profile cylinder

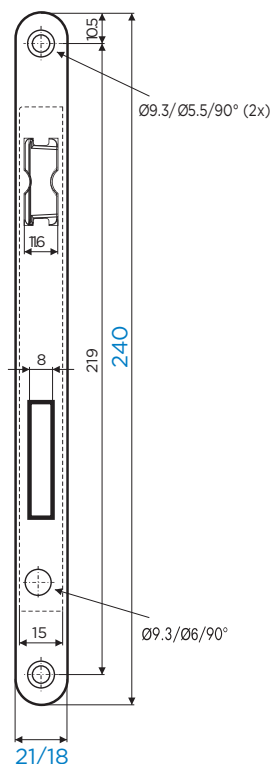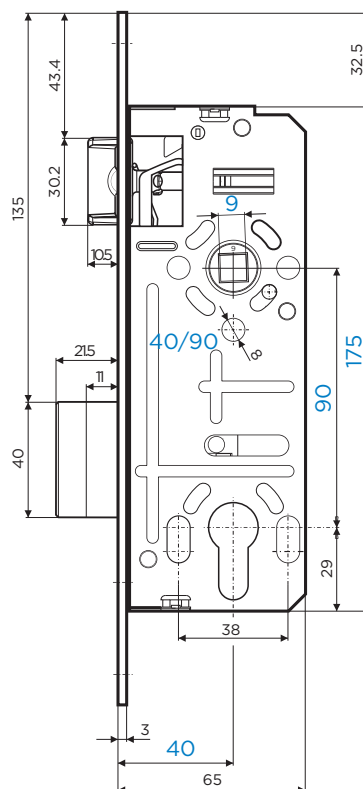

HR

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - s podizačem - jezičak se uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - dva okretaja ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 18 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - standard 90 mm
 - dubina do sredine cilindra 40 mm
- **PAKIRANJE:** trgovačko - brava s prihvatnikom i vijcima u skinu
- Koristiti samo cilindar s prstenom 7,5 x 5 mm TITAN (JUS)

SLO

- **FUNKCIJA:**
 - univerzalna, levo - desna
 - z vzvodom
 - za vhodna in notranja vrata do 60 kg
 - dvojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 18 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VPAD IN ZAPAH:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - standard 90 mm
 - razdalja do cilindra 40 mm
- **PAKIRANJE:** trgovsko - ključavnica, prijemnik in vijaki v skinu
- Uporabiti le cilindar s prstanom 7,5 x 5 mm TITAN (JUS)

EN



- **FUNCTION:**
 - universal, left - right
 - with lever - the latch can be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt double throw
- **FOREND:**
 - steel, finish protection with colour or galvanisation
 - standard 18 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - standard 90 mm
 - distance to cylinder 40 mm
- **PACKAGING:** commercial - lock with forend and screws in skin pack
- Use only the cylinder with a cam 7,5 x 5 mm TITAN

* stara šifra [stara koda](#) previous code

811/50-90 bez podizača | brez vzvoda | without lever (805/8*)



za cilindar
for profile cylinder

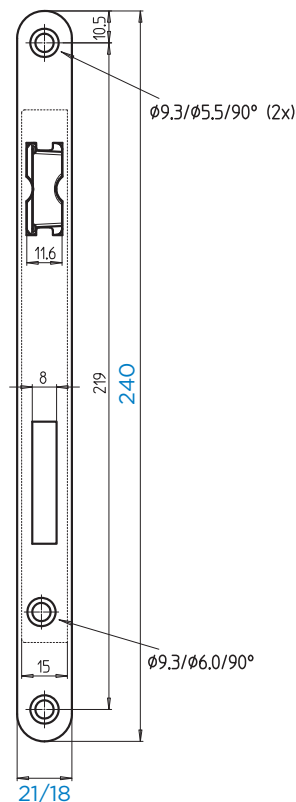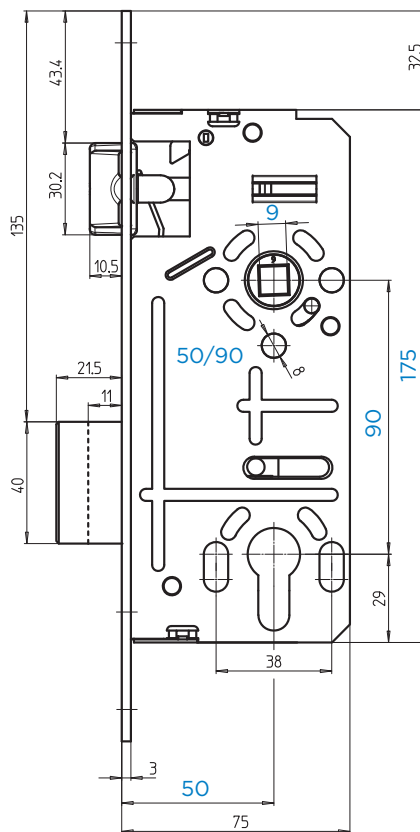

HR

SLO

EN

- **FUNKCIJA:**
 - univerzalna posebno lijevo/desno
 - bez podizača - jezičak se ne uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - dva okretaja ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 21 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - standard 90 mm
 - dubina do sredine cilindra 50 mm
- **PAKIRANJE:**
 - industrijsko - brava (bez prihvatnika i vijaka)
 - trgovačko - brava s prihvatnikom i vijcima u skinu
- Koristiti samo cilindar s prstenom 7,5 x 5 mm TITAN (JUS)

- **FUNKCIJA:**
 - univerzalna, levo - desna
 - brez vzvoda
 - za vhodna in notranja vrata do 60 kg
 - dvojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 21 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VPAD IN ZAPAH:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - standard 90 mm
 - razdalja do cilindra 50 mm
- **PAKIRANJE:**
 - industrijsko - ključavnica (brez prijemnika in vijakov)
 - trgovaško - ključavnica, prijemnik in vijaki v skinu
- Uporabiti le cilindar s prstanom 7,5 x 5 mm TITAN (JUS)



- **FUNCTION:**
 - universal, left - right
 - without lever - the latch can not be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt double throw
- **FOREND:**
 - steel, finish protection with colour or galvanisation
 - standard 21 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - standard 90 mm
 - distance to cylinder 50 mm
- **PACKAGING:**
 - industrial - lock (without forend and screws)
 - commercial - lock with forend and screws in skin pack
- Use only the cylinder with a cam 7,5 x 5 mm TITAN

* stara šifra **stara koda** previous code

811/50-90 s podizačem | z vzvodom | with lever (807/8*)



za cilindar
for profile cylinder

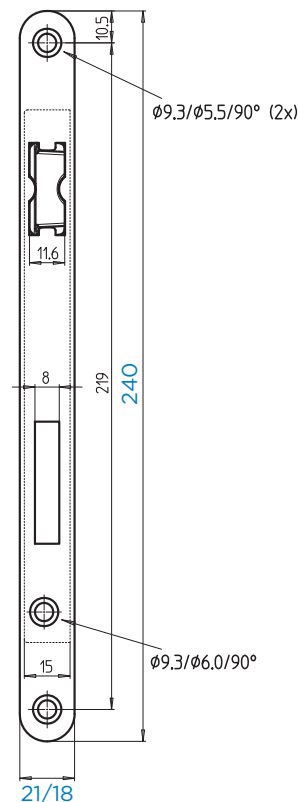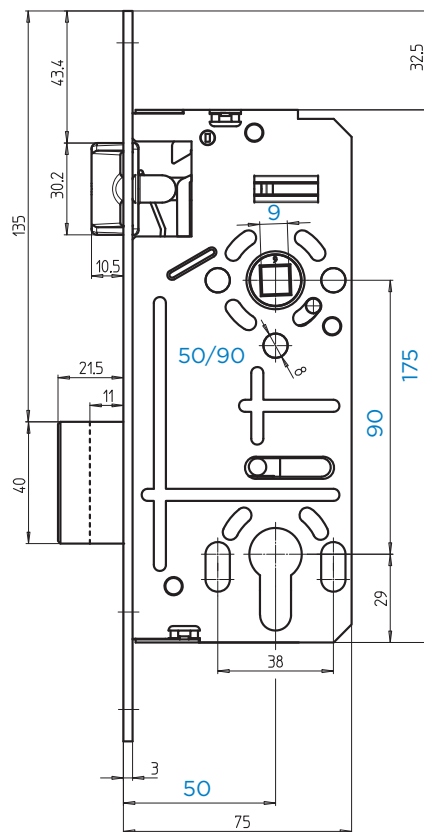

HR

SLO

EN


- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - s podizačem - jezičak se uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - dva okretaja ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 21 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - standard 90 mm
 - dubina do sredine cilindra 50 mm
- **PAKIRANJE:** trgovačko - brava s prihvatom i vijcima u skinu
- Koristiti samo cilindar s prstenom 7,5 x 5 mm TITAN (JUS)

- **FUNKCIJA:**
 - univerzalna, levo - desna
 - z vzvodom
 - za vhodna in notranja vrata do 60 kg
 - dvojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 21 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VPAD IN ZAPAH:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - standard 90 mm
 - razdalja do cilindra 50 mm
- **PAKIRANJE:** trgovsko - ključavnica, prijemnik in vijaki v skinu
- Uporabiti le cilindar s prstanom 7,5 x 5 mm TITAN (JUS)

- **FUNCTION:**
 - universal, left - right
 - with lever - the latch can be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt double throw
- **FOREND:**
 - steel, finish protection with colour or galvanisation
 - standard 21 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - standard 90 mm
 - distance to cylinder 50 mm
- **PACKAGING:** commercial - lock with forend and screws in skin pack
- Use only the cylinder with a cam 7,5 x 5 mm TITAN

* stara šifra **stara koda** previous code

709/50-90

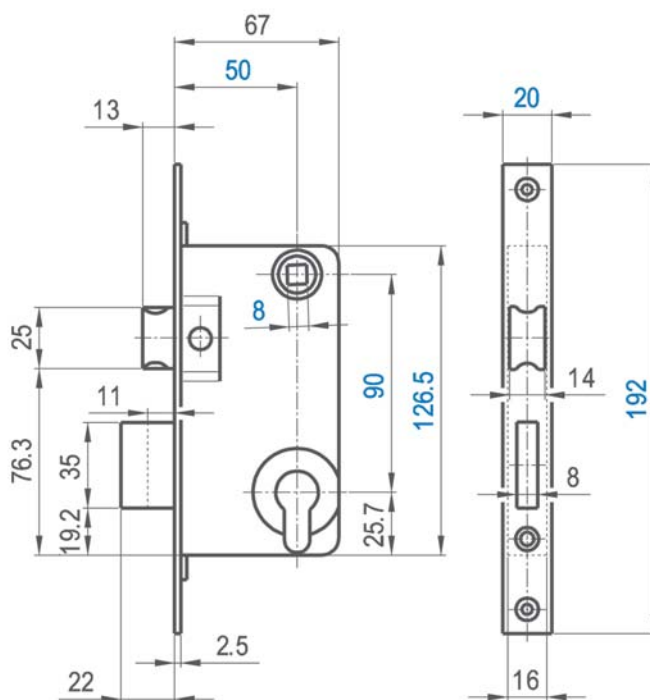

HR

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - s podizačem - jezičak se uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - dva okretaja ključa
- **ČEONA PLOČA:**
 - čelik, obrada galvanizirano
 - 20 mm
- **TIJELO:** čelik, obrada bojano
- **JEZIČAK I ZASUN:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - standard 90 mm
 - dubina do sredine cilindra 50 mm
- **PAKIRANJE:** trgovačko - brava s prihvatnikom u kutiji
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)

SLO


- **FUNKCIJA:**
 - univerzalna, levo - desna
 - z vzvodom
 - za vhodna in notranja vrata do 60 kg
 - dvojni zaklep
- **ČELNICA:**
 - jeklo - cinkano
 - 20 mm
- **OHIŠJE:** jeklo - barvano
- **VPAD IN ZAPAH:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - standard 90 mm
 - razdalja do cilindra 50 mm
- **PAKIRANJE:** trgovsko - ključavnica s prijemnikom in vijaki v kartonski embalaži
- Uporabiti le cilindar s prstanom 9,5 EN (DIN)

EN

- **FUNCTION:**
 - universal, left - right
 - with lever - the latch can be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt double throw
- **FOREND:**
 - steel, finish protection zinc-plated
 - standard 21 mm
- **CASING:** steel - painted
- **LATCH AND DEADBOLT:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - standard 90 mm
 - distance to cylinder 50 mm
- **PACKAGING:** commercial - lock with forend in cardboard
- Use only the cylinder with a cam 9,5 EN (DIN)

KOLIBER-M PZ 72/55 SP

magnetna bešumna brava
magnetna bešumna ključavnica
magnetic silent door lock

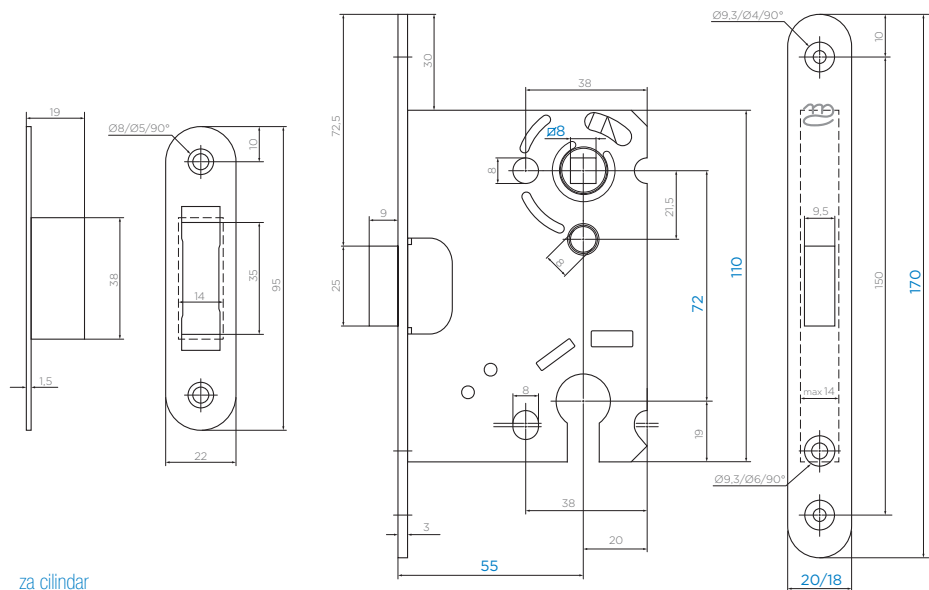

za cilindar
for profile cylinder

OBRADA OBDELAVA FINISH



HR

- FUNKCIJA:
 - univerzalna lijevo/desno
 - za ulazna i unutarnja vrata do 40 kg
 - dva okretaja ključa
 - razmak između vrata i okvira 2 - 5 mm
 - magnetni prihvatač bez regulacije dubine
 - za vrata bez utora ili s utorom
 - koristiti kvake s oprugom
- ČEONA PLOČA:
 - čelik, obrada inox
 - standardno 20 mm
- TIJELO: čelik, zaštićeno od korozije
- ZASUN: tvrda plastika (tiše zatvaranje)
- TEHNIČKE INFORMACIJE:
 - standard 72 mm
 - dubina do sredine cilindra 55 mm
- PAKIRANJE: trgovačko - brava s prihvatnikom i vijcima u kutiji
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)

SLO

- FUNKCIJA:
 - univerzalna, levo - desna
 - za vhodna in notranja vrata do 40 kg
 - dvojni zaklep
 - razmak med vrati in okvirjem 2 - 5 mm
 - magnetni prijemnik brez regulacije globine
 - za vrata bez utora ali z utorom
 - uporabiti kljuko z vzmetjo
- ČELNICA:
 - jeklo, inox
 - standard 20 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- ZAPAH: plastika - pom (tišje zapiranje)
- TEHNIČNE INFORMACIJE:
 - standard 72 mm
 - razdalja do cilindra 55 mm
- PAKIRANJE: trgovsko - ključavnica s prijemnikom in vijaki v kartonski embalaži
- Uporabiti le cilindar s prstanom 9,5 mm EN (DIN)



EN

- FUNCTION:
 - universal, left - right
 - for entrance and inner door of up to 40 kg
 - deadbolt double throw
 - distance between door and frame 2 - 5 mm
 - striker plate with magnet without depth regulation
 - for non-rebated and rebated doors
 - use door handle with springs
- FOREND:
 - stainless steel
 - standard 20 mm
- CASING: steel - protected against corrosion
- DEADBOLT: Plastics - pom
- TECHNICAL INFORMATION:
 - standard 72 mm
 - distance to cylinder 55 mm
- PACKAGING: commercial - lock with forend and screws in cardboard
- Use only the cylinder with a cam 9,5mm EN (DIN)

811/40 (809/V 6,5*)



za cilindar
for profile cylinder

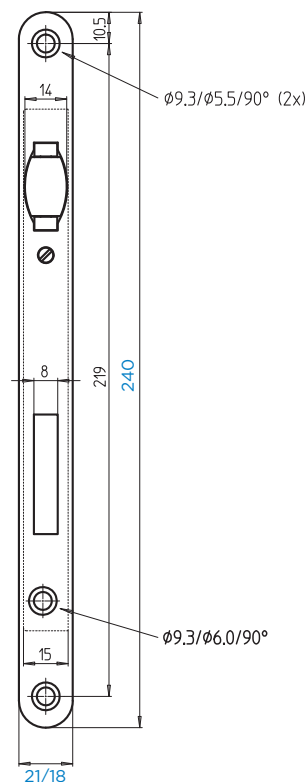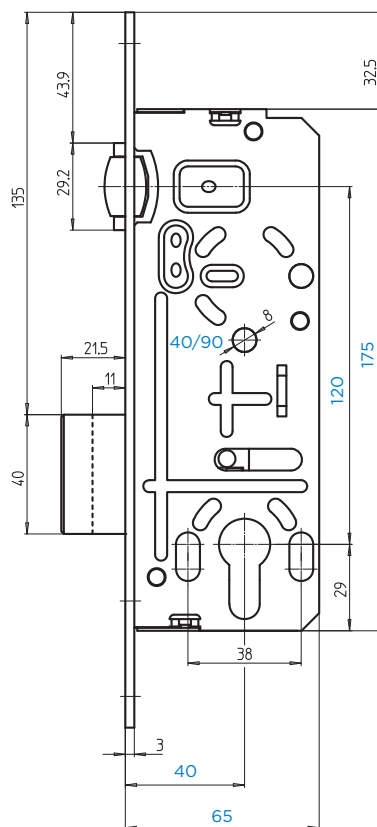

HR

- FUNKCIJA:
 - univerzalna lijevo/desno
 - bez podizača - valjak se ne uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - dva okretaja ključa
- ČEONA PLOČA:
 - čelik, obrada bojano ili galvanizirano
 - standardno 18 mm
- TIJELO: čelik, zaštićeno od korozije
- VALJAK: mesingani, regulacija dubine
- ZASUN: metalni - cinkova legura
- TEHNIČKE INFORMACIJE: dubina do sredine cilindra 40 mm
- PAKIRANJE: trgovačko - brava u skinu (bez prihvatnika i vijaka)
- Koristiti samo cilindar s prstenom 7,5 x 5 mm TITAN (JUS)

SLO

- FUNKCIJA:
 - univerzalna, levo - desno
 - brez vzvoda
 - za vhodna in notranja vrata do 60 kg
 - dvojni zaklep
- ČELNICA:
 - jeklo, barvano ali cinkano
 - standard 18 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- VALJČEK: medenina
- ZAPAH: iz kovine (cinkova zlitina)
- TEHNIČNE INFORMACIJE: razdalja do cilindra 40 mm
- PAKIRANJE: trgovsko – ključavnica v skinu
- Uporabiti le cilindar s prstanom 7,5 x 5 mm TITAN (JUS)

EN



- FUNCTION:
 - universal, left - right
 - without lever - the roller can not be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt double throw
- FOREND:
 - steel, finish protection with colour or galvanisation
 - standard 18 mm
- CASING: steel - protected against corrosion
- ROLLER: brass, depth regulation
- DEADBOLT: made of metal - zinc alloy
- TECHICAL INFORMATION: distance to cylinder 40 mm
- PACKAGING: commercial - lock in skin pack (without forend and screws)
- Use only the cylinder with a cam 7,5 x 5 mm TITAN

* stara šifra **stara koda** previous code

811/50 (805/V*)



za cilindar
for profile cylinder

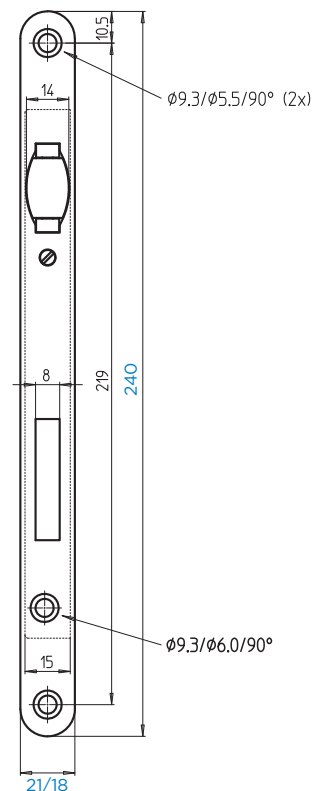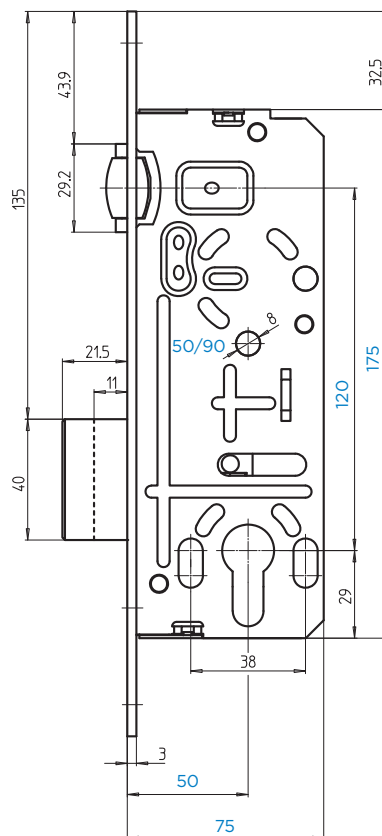

HR

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - bez podizača - valjak se ne uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - dva okretaja ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 21 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **VALJAK:** mesingani, regulacija dubine
- **ZASUN:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:** dubina do sredine cilindra 50 mm
- **PAKIRANJE:** trgovačko - brava u skinu (bez prihvatnika i vijaka)
- Koristiti samo cilindar s prstenom 7,5 x 5 mm TITAN (JUS)

* stara šifra **stara koda** previous code

SLO

- **FUNKCIJA:**
 - univerzalna, levo - desna
 - z vzvodom
 - za vhodna in notranja vrata do 60 kg
 - dvojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 21 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VALJČEK:** medenina
- **ZAPAH:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:** razdalja do cilindra 50 mm
- **PAKIRANJE:** trgovsko – ključavnica v skinu
- Uporabiti le cilindar s prstanom 7,5 x 5 mm TITAN (JUS)


EN

- **FUNCTION:**
 - universal, left - right
 - without lever - the roller can not be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt double throw
- **FOREND:**
 - steel, finish protection with colour or galvanisation
 - standard 21 mm
- **CASING:** steel - protected against corrosion
- **ROLLER:** brass, depth regulation
- **DEADBOLT:** made of metal - zinc alloy
- **TECHICAL INFORMATION:** distance to cylinder 50 mm
- **PACKAGING:** commercial - lock in skin pack (without forend and screws)
- Use only the cylinder with a cam 7,5 x 5mm TITAN


411/55-72




za cilindar
for profile cylinder

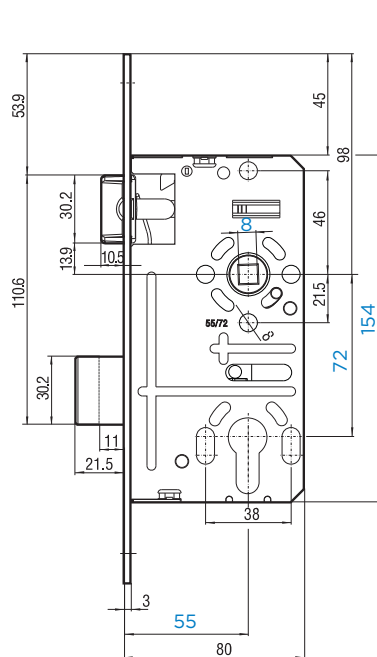

L/D, L/R

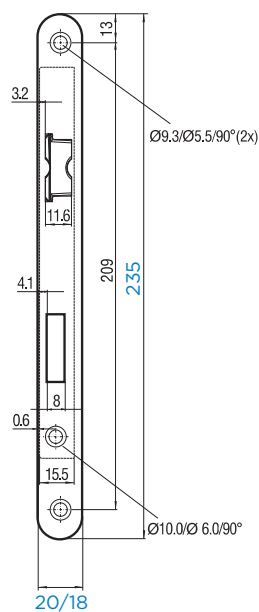

U

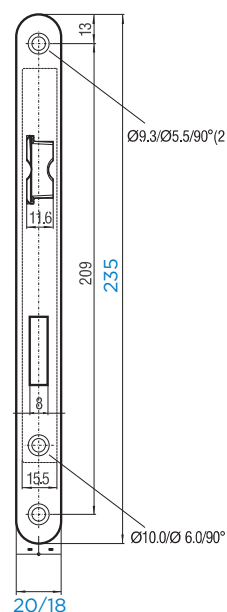

HR

- **FUNKCIJA:**
 - univerzalna / posebno lijevo/desno
 - s podizačem - jezičak se uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - dva okretaja ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 20 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - standard 72 mm
 - dubina do sredine cilindra 55 mm
- **PAKIRANJE:** trgovačko - brava s prihvatnikom i vijcima u skinu
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)

SLO

- **FUNKCIJA:**
 - univerzalna / levo - desna
 - z vzvodom
 - za vhodna in notranja vrata do 60 kg
 - dvojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 20 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VPAD IN ZAPAH:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - standard 72 mm
 - razdalja do cilindra 55 mm
- **PAKIRANJE:** trgovsko - ključavnica s prijemnikom in vijaki v skinu
- Uporabiti le cilindar s prstanom 9,5 mm EN (DIN)


EN

- **FUNCTION:**
 - universal, left - right
 - with lever - the latch can be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt double throw
- **FOREND:**
 - steel, finish protection with colour or galvanisation
 - standard 20 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - standard 72 mm
 - distance to cylinder 55 mm
- **PACKAGING:** commercial - lock with forend and screws in skin pack
- Use only the cylinder with a cam 9,5 mm EN (DIN)

421/65-92 (421 PZ-65W*)



za cilindar
for profile cylinder

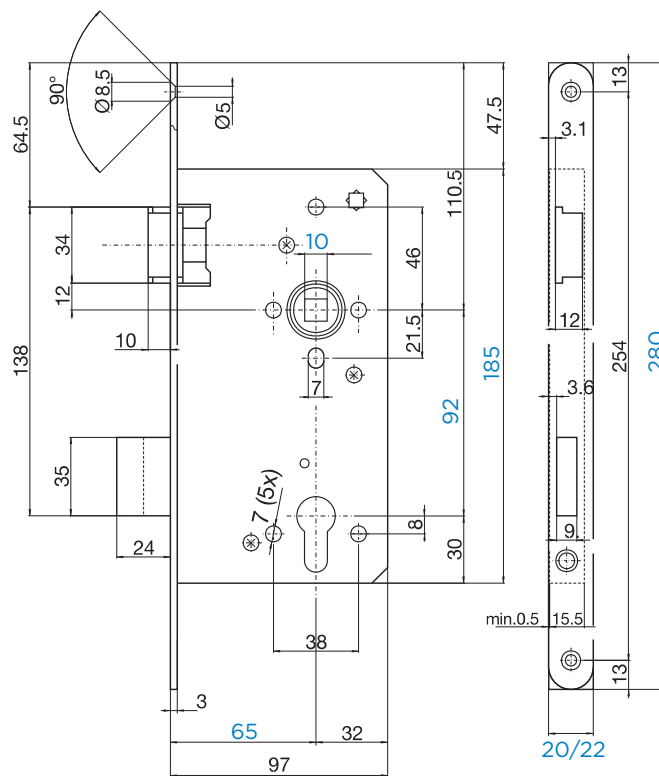

HR

- **FUNKCIJA:**
 - posebno lijevo/desno
 - s podizačem - jezičak se uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - dva okretaja ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 20 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - standard 92 mm
 - dubina do sredine cilindra 65 mm
- **PAKIRANJE:** trgovačko - brava u kutiji (bez prihvatnika i vijaka)
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)

SLO

- **FUNKCIJA:**
 - levo - desna
 - z vzvodom - vpad se odpira preko kljuge in ključa
 - za vhodna in notranja vrata do 60 kg
 - dvojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 20 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VPAD IN ZAPAH:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - standard 92 mm
 - razdalja do cilindra 65 mm
- **PAKIRANJE:** trgovsko - ključavnica v kartonski embalaži
- Uporabiti le cilindar s prstanom 9,5 mm EN (DIN)

EN

- **FUNCTION:**
 - left or right
 - with lever - the latch can be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt double throw
- **FOREND:**
 - steel, finish protection with colour or galvanisation
 - standard 20 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - standard 92 mm
 - distance to cylinder 65 mm
- **PACKAGING:** commercial - lock in cardboard (without forend and screws)
- Use only the cylinder with a cam 9,5 mm EN (DIN)


* stara šifra **stara koda** previous code

D31



**EURO
ELZETT**

za cilindar
for profile cylinder

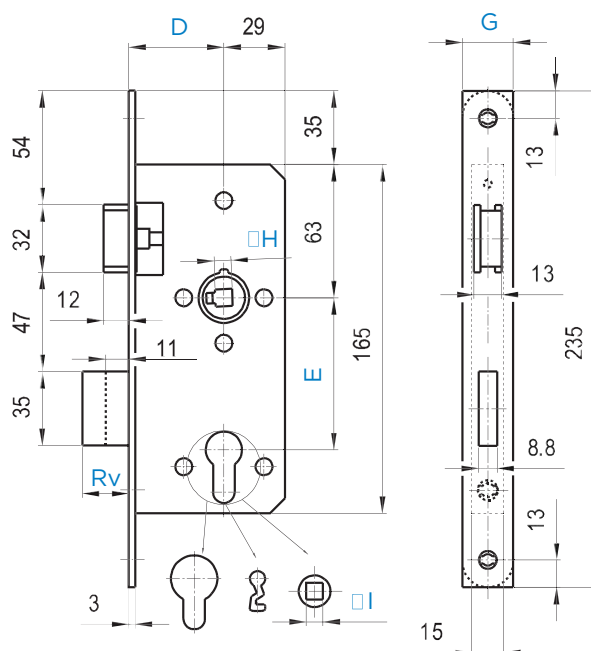

	D	E	G	H	I	Rv
🔑		72			—	(1x) 15 / (2x) 22
🔑	45/50/55	74	20/24	7/8/9	—	(2x) 22
🔑	60/65/70/80	72			—	
🔑		72/78			6/8/9	(1x) 11 / 15 / 20,5

HR

SLO

EN

- **FUNKCIJA:**
 - univerzalno lijevo/desno
 - s podizačem - jezičak se uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 100 kg
 - dva okretaja ključa, za sanitarije jedan okretaj
 - certificirano prema EN 12209-2003 / AC 2005
 - protupožarno prema EN 1634-2 1359 CPD 0219
- **ČEONA PLOČA:**
 - čelik - galvanizirano, opcija inox; okrugla ili pravokutna
 - standardno 20 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:**
 - metalni - cinkova legura
 - zasun otporan na rezanje
 - opcija protupožarno - jezičak i zasun čelik
- **TEHNIČKE INFORMACIJE:**
 - standard 72 mm
 - dubina do sredine cilindra 45/50/55/60/65/70/80 mm
- **PAKIRANJE:**
 - trgovačko - brava s vijkom za cilindar u kutiji
 - prihvatnik se naručuje posebno!
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)
- OSTALE IZVEDBE: na ključ i za wc!


- **FUNKCIJA:**
 - univerzalna, levo - desna
 - z vzvodom - vpad se odpira preko kljuke in ključa
 - za vhodna in notranja vrata do 100 kg
 - dvojni zaklep, za sanitarije enojni zaklep
 - certificirano po EN 12209-2003 / AC 2005
 - možnost - ognjeodporno po EN 1634-2 1359 CPD 0219
- **ČELNICA:**
 - Fe - modra pasivacija INOX; pravokotna ali okrogla
 - standard 20 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VPAD IN ZAPAH:**
 - iz kovine (cinkova zlitina)
 - zapah odporen na rezanje
 - možnost ognjeodpornosti - vpad in zapah jeklo
- **TEHNIČNE INFORMACIJE:**
 - standard 72 mm
 - razdalja do cilindra 45/50/55/60/65/70/80 mm
- **PAKIRANJE:** trgovsko - ključavnica v kartonski embalaži; prijemnik posebno
- Uporabiti le cilindar s prstanom 9,5 mm EN (DIN)
- **RAZLIČICA:** na ključ ali za sanitarije!

- **FUNCTION:**
 - universal, left - right
 - with lever - the latch can be operated by cylinder key
 - for entrance and inner door of up to 100 kg
 - deadbolt double throw
 - certificated according to EN 12209-2003 / AC 2005
 - option fireproof acc. to EN 1634-2 1359 CPD 0219
- **FOREND:**
 - steel, finish protection zinc-plated or stainless steel
 - standard 20 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:**
 - made of metal - zinc alloy
 - deadbolt protected against sawing
 - option fireproof - steel
- **TECHICAL INFORMATION:**
 - standard 72 mm
 - distance to cylinder 45/50/55/60/65/70/80 mm
- **PACKAGING:** commercial - lock with screws in cardboard; forend to be ordered separately
- Use only the cylinder with a cam 9,5 mm EN (DIN)
- **OTHER TYPES:** on key or for bathrooms!

777/50 (777/8*)



za cilindar
for profile cylinder

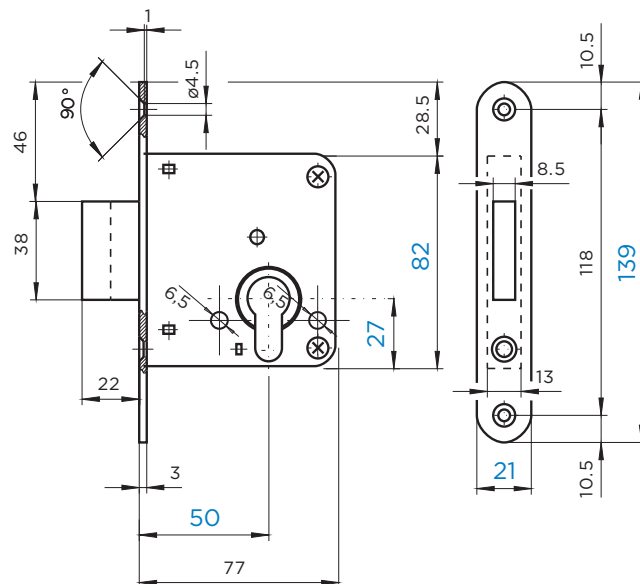

HR

- FUNKCIJA:
 - univerzalna lijevo/desno
 - samo na cilindar
 - za vrata do 60 kg
 - dva okretaja ključa
- ČEONA PLOČA:
 - čelik, obrada bojano ili galvanizirano
 - standardno 21 mm
- TIJELO: čelik, zaštićeno od korozije
- ZASUN: metalni - cinkova legura
- TEHNIČKE INFORMACIJE: dubina do sredine cilindra 50 mm
- PAKIRANJE:
 - trgovačko - brava s prihvatnikom, rozetama i vijcima u skinu
 - trgovačko - brava s cilindrom 30x35 mm, prihvatnikom, rozetom i vijcima u skinu
- Koristiti samo cilindar s prstenom 7,5 x 5 mm TITAN (JUS)

SLO

- FUNKCIJA:
 - univerzalna, levo - desna
 - za vrata do 60 kg
 - dvojni zaklep
- ČELNICA:
 - jeklo, barvano ali cinkano
 - standard 21 mm
- OHIŠJE: jeklo - zaštićeno proti koroziji
- ZAPAH: iz kovine (cinkova zlitina)
- TEHNIČNE INFORMACIJE: razdalja do cilindra 50 mm
- PAKIRANJE:
 - trgovsko - ključavnica s prijemnikom, rozeto in vijaki v skinu
 - trgovsko - ključavnica s cilindrom 30x35 mm, prijemnikom, rozeto in vijaki v skinu
- Uporabiti le cilindar s prstanom 7,5 x 5 mm TITAN (JUS)

EN

- FUNCTION:
 - universal, left or right
 - for door of up to 60 kg
 - deadbolt double throw
- FOREND:
 - steel, finish protection with colour or zinc-plated
 - standard 21 mm
- CASING: steel – protected against corrosion
- DEADBOLT: made of metal - zinc alloy
- TECHNICAL INFORMATION: distance to cylinder 50 mm
- PACKAGING:
 - commercial-lock with forend, rosette and screws in skin pack
 - commercial-lock with cylinder 30x35 mm, forend, rosette and screws in skin pack
- Use only the cylinder with a cam 7,5 x 5mm TITAN

* stara šifra **stara koda** previous code

777/45 (777/7*)




za cilindar
for profile cylinder

* za staklena vrata

* za staklena vrata

* for glass doors

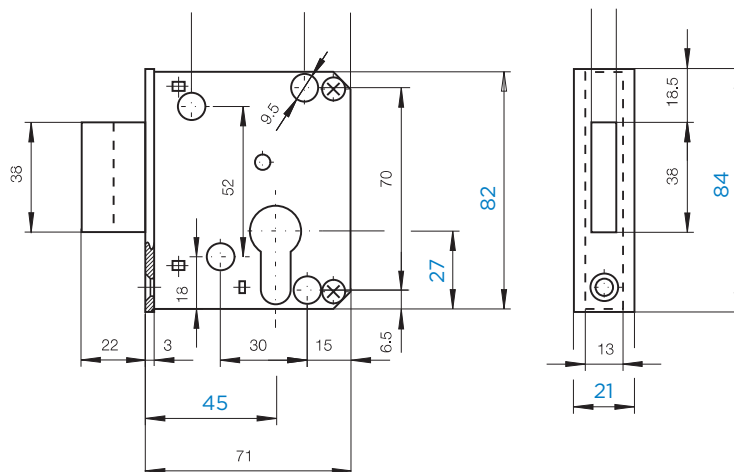

HR

- FUNKCIJA:
 - univerzalna lijevo/desno
 - samo na cilindar
 - za staklena vrata do 60 kg
 - dva okretaja ključa
- TIJELO: čelik, zaštićeno od korozije
- ZASUN: metalni - cinkova legura
- TEHNIČKE INFORMACIJE: dubina do sredine cilindra 45 mm
- PAKIRANJE:
 - trgovačko - brava u skinu
 - trgovačko - brava s cilindrom 30x30 mm, prihvatnikom, rozetama i vijcima u skinu
- Koristiti samo cilindar s prstenom 7,5 x 5 mm TITAN (JUS)

SLO

- FUNKCIJA:
 - univerzalna, levo - desna
 - za vrata do 60 kg
 - dvojni zaklep
- ČELNICA: jeklo, barvano ali cinkano
- OHIŠJE: jeklo - zaštićeno proti koroziji
- ZAPAH: iz kovine (cinkova zlitina)
- TEHNIČNE INFORMACIJE: razdalja do cilindra 45 mm
- PAKIRANJE:
 - trgovačko - ključavnica v skinu
 - trgovačko - ključavnica s cilindrom 30x30 mm, prijemnikom, rozeto in vijaki v skinu
- Uporabiti le cilindar s prstanom 7,5 x 5 mm TITAN (JUS)

EN


- FUNCTION:
 - universal, left or right
 - for glass door of up to 60 kg
 - deadbolt double throw
- CASING: steel - protected against corrosion
- DEADBOLT: made of metal - zinc alloy
- TECHICAL INFORMATION: distance to cylinder 45 mm
- PACKAGING:
 - commercial - lock in skin pack
 - commercial - lock with cylinder 30x30, forend, rosette and screws in skin pack
- Use only the cylinder with a cam 7,5 x 5 mm TITAN

* stara šifra stara koda previous code

806/40-90 (600/WC*)



za sanitarije
for bathrooms

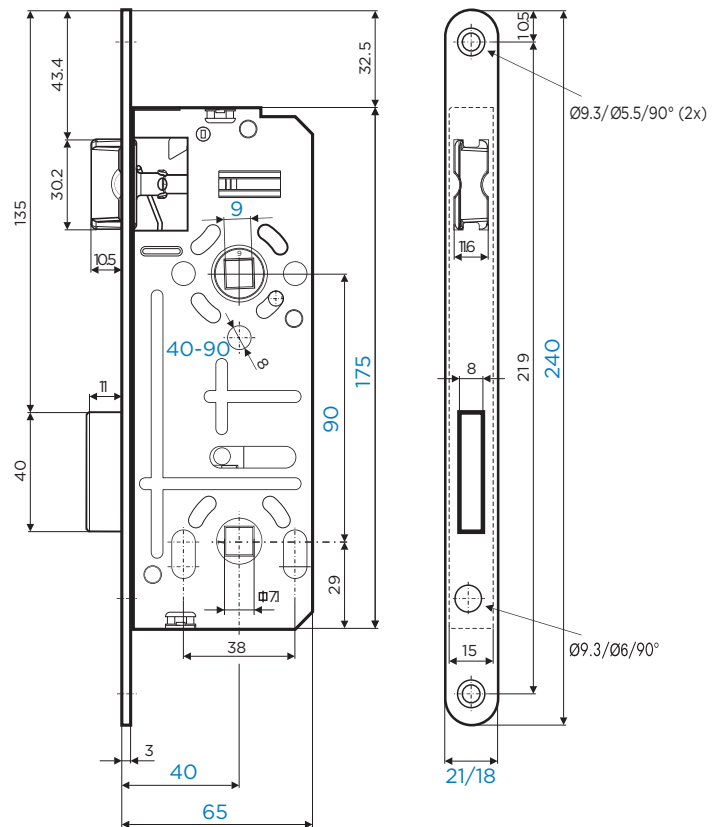

HR

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - za unutarnja vrata do 60 kg
 - jedan okretaj ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 18 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - standard 90 mm
 - dubina do sredine rupe za wc mehanizam 40 mm
- **PAKIRANJE:** trgovačko - brava u skinu

SLO

- **FUNKCIJA:**
 - univerzalna, levo - desna
 - za notranja vrata do 60 kg
 - enojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 18 mm
- **OHIŠJE:** jeklo - zaštićeno proti koroziji
- **VPAD IN ZAPAH:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - standard 90 mm
 - razdalja do cilindra wc 40 mm
- **PAKIRANJE:** trgovsko - ključavnica v skinu

EN


- **FUNCTION:**
 - universal, left - right
 - for inner door of up to 60 kg
 - deadbolt single throw
- **FOREND:**
 - steel, finish protection with colour or zinc-plated
 - standard 18 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - standard 90 mm
 - distance to toilet mechanism 40 mm
- **PACKAGING:** commercial - lock in skin pack

* stara šifra [stara koda](#) previous code

806/50-90 (600/8*)



za sanitarije
for bathrooms

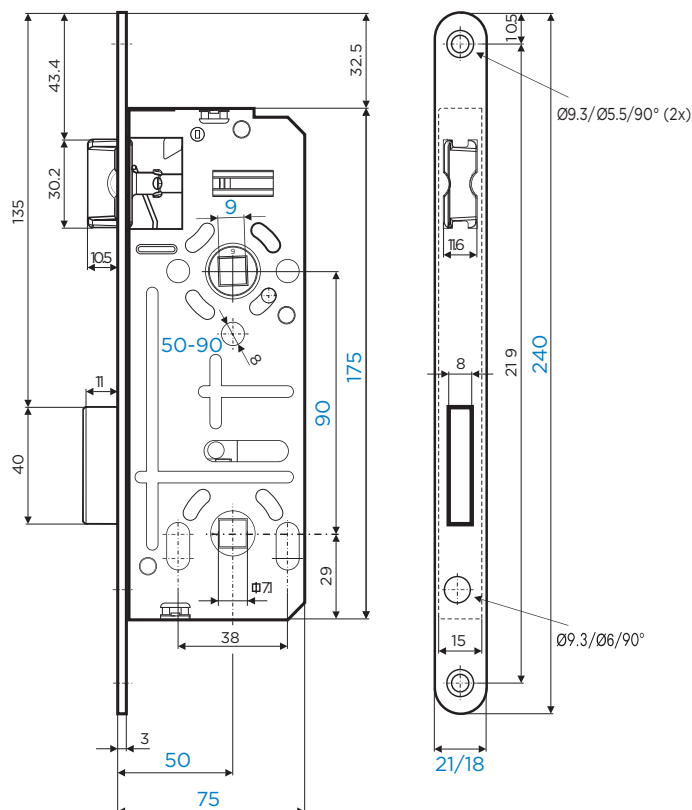

HR

- FUNKCIJA:
 - univerzalna lijevo/desno
 - za unutarnja vrata do 60 kg
 - jedan okretaj ključa
- ČEONA PLOČA:
 - čelik, obrada bojano ili galvanizirano
 - standardno 21 mm
- TIJELO: čelik, zaštićeno od korozije
- JEZIČAK I ZASUN: metalni - cinkova legura
- TEHNIČKE INFORMACIJE:
 - standard 90 mm
 - dubina do sredine rupe za wc mehanizam 50 mm
- PAKIRANJE: trgovačko - brava u skinu

SLO

- FUNKCIJA:
 - univerzalna, levo - desna
 - za notranja vrata do 60 kg
 - enojni zaklep
- ČELNICA:
 - jeklo, barvano ali cinkano
 - standard 21 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- VPAD IN ZAPAH: iz kovine (cinkova zlitina)
- TEHNIČNE INFORMACIJE:
 - standard 90 mm
 - razdalja do cilindra wc 50 mm
- PAKIRANJE: trgovsko - ključavnica v skinu

EN


- FUNCTION:
 - universal, left - right
 - for inner door of up to 60 kg
 - deadbolt single throw
- FOREND:
 - steel, finish protection with colour or zinc-plated
 - standard 21 mm
- CASING: steel - protected against corrosion
- LATCH AND DEADBOLT: made of metal - zinc alloy
- TECHNICAL INFORMATION:
 - standard 90 mm
 - distance to toilet mechanism 50 mm
- PACKAGING: commercial - lock in skin pack

* stara šifra **stara koda** previous code

406/55-72



za sanitarije
for bathrooms

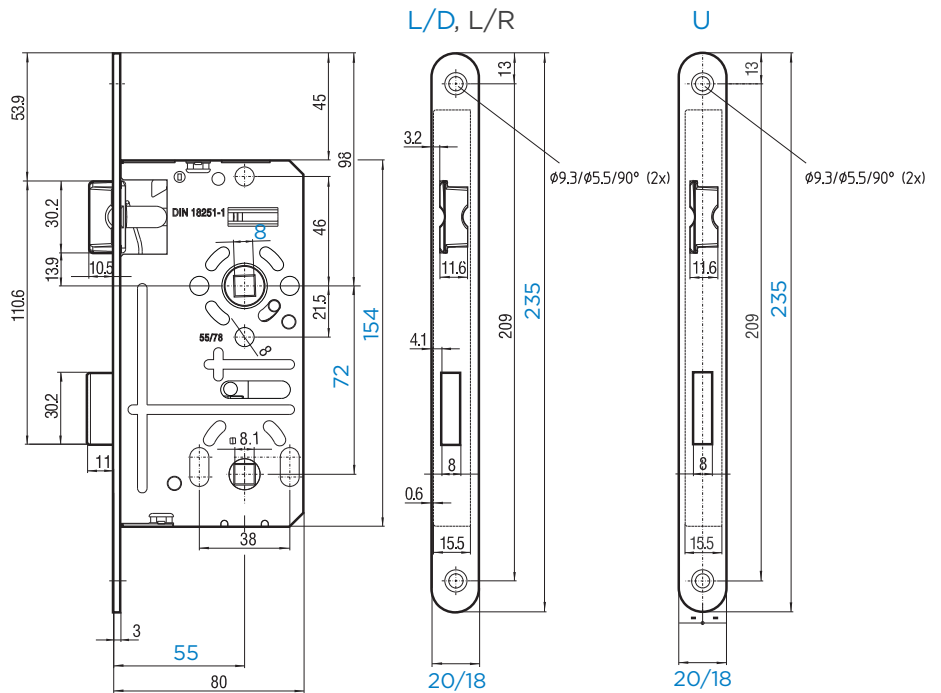

HR

- **FUNKCIJA:**
 - univerzalna / posebno lijevo/desno
 - za unutarnja vrata do 60 kg
 - jedan okretaj ključa
- **ČEONA PLOČA:**
 - čelik, obrada bojano ili galvanizirano
 - standardno 20 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:** metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - standard 72 mm
 - dubina do sredine rupe za wc mehanizam 55 mm
- **PAKIRANJE:** trgovačko - brava u kutiji

SLO


- **FUNKCIJA:**
 - univerzalna ali levo - desna
 - za notranja vrata do 60 kg
 - enojni zaklep
- **ČELNICA:**
 - jeklo, barvano ali cinkano
 - standard 20 mm
- **OHIŠJE:** jeklo - zaštićeno proti koroziji
- **VPAD IN ZAPAH:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - standard 72 mm
 - razdalja do cilindra wc 55 mm
- **PAKIRANJE:** trgovsko - ključavnica v kartonski embalaži

EN


- **FUNCTION:**
 - universal or only left - right
 - for inner door of up to 60 kg
 - deadbolt single throw
- **FOREND:**
 - steel, finish protection with colour or zinc-plated
 - standard 20 mm
- **CASING:** steel – protected against corrosion
- **LATCH AND DEADBOLT:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - standard 72 mm
 - distance to toilet mechanism 55 mm
- **PACKAGING:** commercial - lock in cardboard

KOLIBER-M BAD 72/55 SP

magnetna bešumna brava
magnetna bešumna ključavnica
magnetic silent door lock

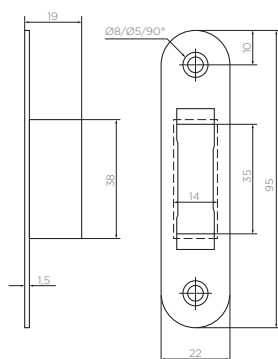

za sanitarije
for bathrooms

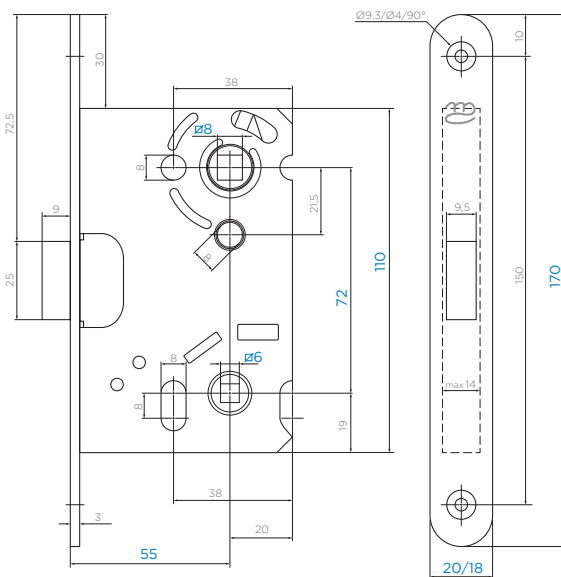

OBRADA OBDELAVA FINISH



HR

- FUNKCIJA:
 - univerzalna
 - za unutarnja vrata do 40 kg
 - dva okretaja ključa
 - razmak između vrata i okvira 2 - 5 mm
 - prihvatač s magnetom nema regulaciju
 - za vrata bez utora ili s utorom
 - koristiti kvake s oprugom
- ČEONA PLOČA:
 - čelik, obrada inox
 - standardno 20 mm
- TIJELO: čelik, zaštićeno od korozije
- ZASUN: tvrda plastika (tiše zatvaranje)
- TEHNIČKE INFORMACIJE:
 - standard 72 mm
 - dubina do sredine mehanizma za wc 55 mm
- PAKIRANJE: trgovačko - brava s prihvatom i vijcima u kutiji


SLO

- FUNKCIJA:
 - univerzalna
 - za notranja vrata do 40 kg
 - dvojni zaklep
 - razmak med vrati in okvirjem 2 - 5 mm
 - prijemnik s magnetom nima regulacije
 - za vrata z ravnim in profilnim čelnim robom
 - uporabiti kljuko z vzmetjo
- ČELNICA:
 - jeklo, inox
 - standard 20 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- ZAPAH: plastika - pom (tiše zapiranje)
- TEHNIČNE INFORMACIJE:
 - standard 72 mm
 - razdalja do cilindra 55 mm
- PAKIRANJE: trgovsko - ključavnica s prijemnikom in vijaki v kartonski embalaži

EN

- FUNCTION:
 - universal
 - for inner door of up to 40 kg
 - deadbolt double throw
 - distance between door and frame 2 - 5 mm
 - striker plate with magnet without depth regulation
 - for flush (non-rebated) and rebated doors
 - use door handle with springs
- FOREND:
 - stainless steel
 - standard 20 mm
- CASING: steel - protected against corrosion
- DEADBOLT: Plastics - pom
- TECHNICAL INFORMATION:
 - standard 72 mm
 - distance to toilet mechanism 55 mm
- PACKAGING: commercial - lock with key forend and screws in cardbox

Kako odabrati bravu? | Kako izbrati ključavnicu? | How to Choose Lock?

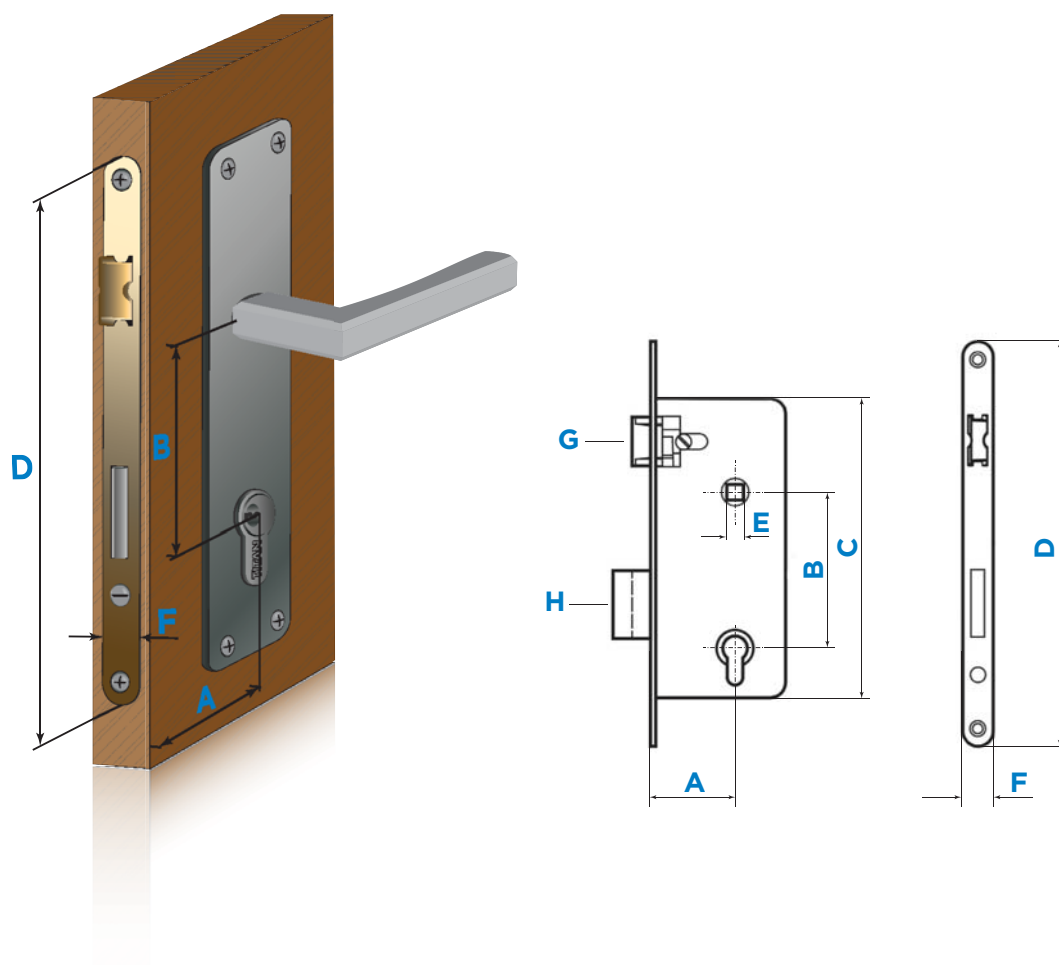

HR

Pri kupnji nove brave potrebno je znati sljedeće mjere:

- A) Dubina brave
- B) Razmak između sredine rupe za kvaku i sredine rupe za cilindar, ključ ili trn
- C) Dužina tijela brave
- D) Dužina čelone ploče
- E) Širina trna kvake
- F) Širina čelone ploče
- G) Jezičak (valjčak)
- H) Zasun

SLO

Pri nakupu ključavnice je potrebno vedeti naslednje dimenzije:

- A) Ključna razdalja
- B) Medosna razdalja
- C) Višina ohišja
- D) Dolžina čelnice
- E) Vretenka
- F) Širina čelnice
- G) Vpad (valjček)
- H) Zapah


EN

When purchasing a door lock following measures should be known:


- A) Backset
- B) Centre distance
- C) Height of the lock case
- D) Forend length
- E) Hub
- F) Forend width
- G) Latch (roller)
- H) Bolt

Vrste vrata | Vrste vrat | Door Types

1.



2.



HR

- 1) Vrata s utorom (falcom)
- 2) Vrata bez utora (falca)

SLO

- 1) Profil vrat s profilnim čelnim robom
- 2) Profil vrat s ravnim čelnim robom

EN

- 1) Profile of a rebated door
- 2) Profile of a flush door (non-rebated)

Strana brave (lijeva / desna) | Stran ključavnice (leva / desna) | Door Lock Side (left / right)

1.



2.



3.



4.



HR

- 1) DIN lijeva (otvaranje vrata naprijed udesno)
- 2) DIN lijeva (otvaranje nazad ulijevo)
- 3) DIN desna (otvaranje naprijed ulijevo)
- 4) DIN desna (otvaranje vrata nazad udesno)

SLO

- 1) DIN leva (odpiranje desno naprej)
- 2) DIN leva (odpiranje levo nazaj)
- 3) DIN desna (odpiranje levo naprej)
- 4) DIN desna (odpiranje desno nazaj)


EN

- 1) DIN left (right inwards)
- 2) DIN left (left outwards)
- 3) DIN right (left inwards)
- 4) DIN right (right outwards)



BRAVE ZA METALNA I PVC VRATA
KLJUČAVNICE ZA KOVINSKA IN PVC VRATA
LOCKS FOR METAL AND PVC DOORS

821/17 (821/25*)

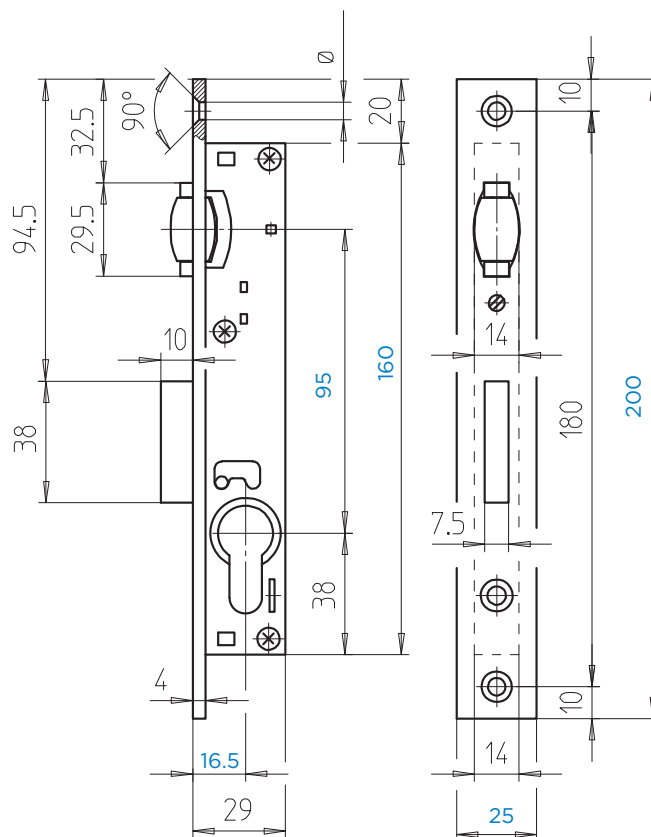

HR

- FUNKCIJA:
 - univerzalna lijevo/desno
 - bez podizača - valjak se ne uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 40 kg
 - jedan okretaj ključa
- ČEONA PLOČA: aluminij, 25 mm
- TIJELO: čelik, zaštićeno od korozije
- VALJAK: mesingani, regulacija dubine
- ZASUN: metalni - cinkova legura
- TEHNIČKE INFORMACIJE: dubina do sredine cilindra 16,5 mm
- PAKIRANJE:
 - trgovačko - brava u skinu, bez cilindra
 - trgovačko - brava s vijkom i cilindrom 27x27 7,5 mm u skinu
- Koristiti samo cilindar s prstenom 7,5 x 5 mm TITAN (JUS)

SLO


- FUNKCIJA:
 - univerzalna, levo - desna
 - brez vzvoda
 - za vhodna in notranja vrata do 40 kg
 - enojni zaklep
- ČELNICA: Al, 25 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- VALJČEK: medenina, regulacija globine
- ZAPAH: iz kovine (cinkova zlitina)
- TEHNIČNE INFORMACIJE: razdalja do cilindra 16,5 mm
- PAKIRANJE:
 - trgovsko - ključavnica v skinu, brez cilindra
 - trgovsko - ključavnica z vijakom in cilindrom 27x27 7,5 mm v skinu
- Uporabiti le cilindar s prstanom 7,5 x 5 mm TITAN (JUS)

EN

- FUNCTION:
 - universal, left - right
 - without lever - the roller can not be operated by cylinder key
 - for entrance and inner door of up to 40 kg
 - deadbolt single throw
- FOREND: Al, 25 mm
- CASING: steel – protected against corrosion
- ROLLER: brass, regulation of deepness
- DEADBOLT: made of metal - zinc alloy
- TECHICAL INFORMATION: distance to cylinder 16.5 mm
- PACKAGING:
 - commercial - lock in skin pack
 - commercial - lock with screw and cylinder 27x27 7,5 mm in skin pack
- Use only the cylinder with a cam 7,5 x 5 mm TITAN

* stara šifra **stara koda** previous code

821/25 (821/40*)

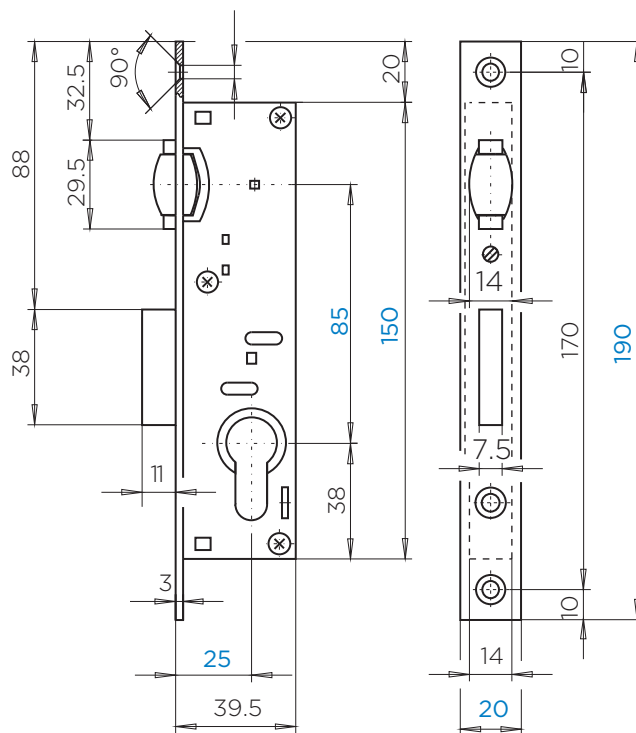

HR

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - bez podizača - valjak se ne uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 40 kg
 - jedan okretaj ključa
- ČEONA PLOČA: čelik, 20 mm
- TIJELO: čelik, zaštićeno od korozije
- VALJAK: mesingani, regulacija dubine
- ZASUN: metalni - cinkova legura
- TEHNIČKE INFORMACIJE: dubina do sredine cilindra 25 mm
- PAKIRANJE:
 - trgovačko - brava u skinu, bez cilindra
 - trgovačko - brava s vijkom i cilindrom 27x27 7,5 mm u skinu
- Koristiti samo cilindar s prstenom 7,5 x 5 mm TITAN (JUS)

SLO


- **FUNKCIJA:**
 - univerzalna, levo - desna
 - brez vzvoda
 - za vhodna in notranja vrata do 40 kg
 - enojni zaklep
- ČELNICA: jeklo, 20 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- VALJČEK: medenina, regulacija globine
- ZAPAH: iz kovine (cinkova zlitina)
- TEHNIČNE INFORMACIJE: razdalja do cilindra 25 mm
- PAKIRANJE:
 - trgovsko - ključavnica v skinu, brez cilindra
 - trgovsko - ključavnica z vijakom in cilindrom 27x27 7,5 mm v skinu
- Uporabiti le cilindar s prstanom 7,5 x 5 mm TITAN (JUS)

EN

- **FUNCTION:**
 - universal, left - right
 - without lever - the roller can not be operated by cylinder key
 - for entrance and inner door of up to 40 kg
 - deadbolt single throw
- FOREND: steel, 20 mm
- CASING: steel – protected against corrosion
- ROLLER: brass, regulation of deepness
- DEADBOLT: made of metal - zinc alloy
- TECHICAL INFORMATION: distance to cylinder 25 mm
- PACKAGING:
 - commercial - lock in skin pack
 - commercial - lock with screw and cylinder 27x27 7,5 mm in skin pack
- Use only the cylinder with a cam 7,5 x 5mm TITAN

* stara šifra [stara koda](#) previous code

822/25-60 (822/40*)

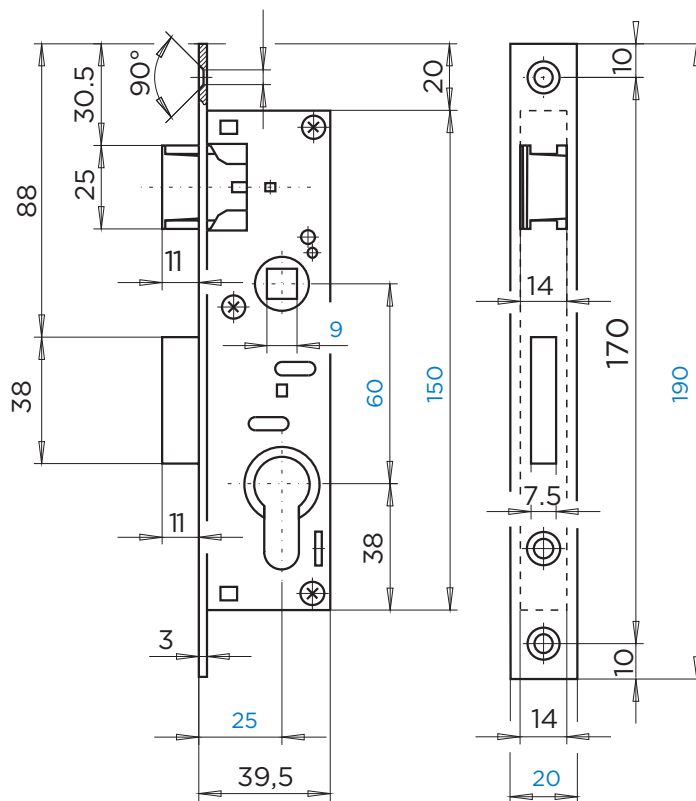

HR

- FUNKCIJA:
 - posebno lijevo/desno
 - bez podizača - jezičak se ne uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 40 kg
 - jedan okretaj ključa
- ČEONA PLOČA: čelik, 20 mm
- TIJELO: čelik, zaštićeno od korozije
- JEZIČAK I ZASUN: metalni - cinkova legura
- TEHNIČKE INFORMACIJE:
 - standard 68 mm
 - dubina do sredine cilindra 25 mm
- PAKIRANJE:
 - trgovačko - brava u skinu, bez cilindra
 - trgovačko - brava s vijkom i cilindrom 27x27 7,5 mm u skinu
- Koristiti samo cilindar s prstenom 7,5 x 5 mm TITAN (JUS)

SLO

- FUNKCIJA:
 - levo - desna
 - brez vzvoda
 - za vhodna in notranja vrata do 40 kg
 - enojni zaklep
- ČELNICA: jeklo, 20 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- VPAD IN ZAPAH: iz kovine (cinkova zlitina)
- TEHNIČNE INFORMACIJE:
 - standard 68 mm
 - razdalja do cilindra 25 mm
- PAKIRANJE:
 - trgovsko - ključavnica v skinu, brez cilindra
 - trgovsko - ključavnica z vijakom in cilindrom 27x27 7,5 mm v skinu
- Uporabiti le cilindar s prstanom 7,5 x 5 mm TITAN (JUS)

EN


- FUNCTION:
 - left or right
 - without lever - the latch can not be operated by cylinder key
 - for entrance and inner door of up to 40 kg
 - deadbolt single throw
- FOREND: steel, 20 mm
- CASING: steel – protected against corrosion
- LATCH AND DEADBOLT: made of metal - zinc alloy
- TECHNICAL INFORMATION:
 - standard 68 mm
 - distance to cylinder 16,5 mm
- PACKAGING:
 - commercial - lock in skin pack
 - commercial - lock with screw and cylinder 27x27 7,5 mm in skin pack
- Use only the cylinder with a cam 7,5 x 5mm TITAN

* stara šifra [stara koda](#) previous code

830/20, 25, 30, 35, 40



A	G
20	10
25	15
30	15
35	15
40	15

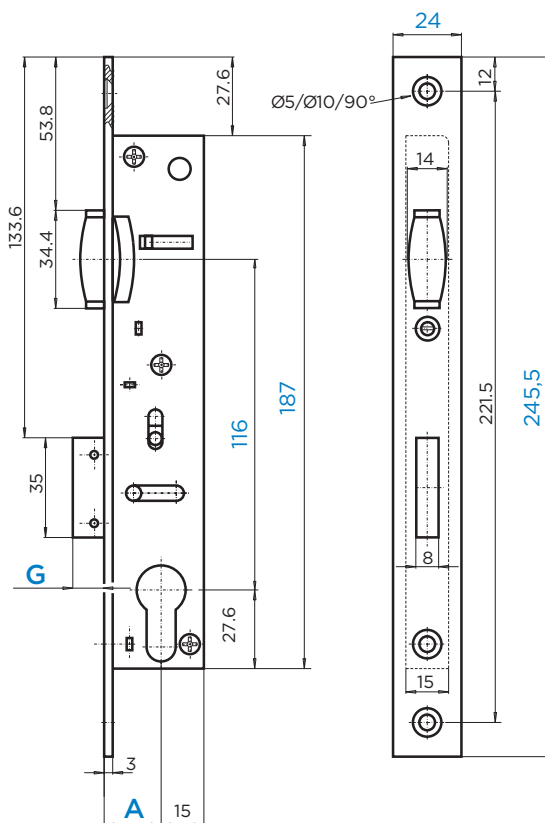

HR

SLO


EN

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - bez podizača - valjak se ne uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - jedan okretaj ključa
- ČEONA PLOČA: čelik, 24 mm
- TIJELO: čelik, zaštićeno od korozije
- VALJAK: mesingani, regulacija dubine
- ZASUN: metalni - cinkova legura
- TEHNIČKE INFORMACIJE: dubina do sredine cilindra 20/25/30/35/40 mm
- PAKIRANJE:
 - trgovačko - brava s vijkom u kutiji, bez cilindra
 - trgovačko - brava s vijkom i cilindrom 30x30 9,5 mm u skinu
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)

- **FUNKCIJA:**
 - univerzalna, levo - desna
 - brez vzvoda
 - za vhodna in notranja vrata do 60 kg
 - enojni zaklep
- ČELNICA: jeklo, 24 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- VALJČEK: medenina, regulacija globine
- ZAPAH: iz kovine (cinkova zlitina)
- TEHNIČNE INFORMACIJE: razdalja do cilindra 20/25/30/35/40 mm
- PAKIRANJE:
 - trgovsko - ključavnica z vijakom v kartonski embalaži
 - trgovsko - ključavnica z vijakom in cilindrom 30x30 9,5 mm v skinu
- Uporabiti le cilindar s prstanom 9,5 mm EN (DIN)

- **FUNCTION:**
 - universal, left - right
 - without lever - the roller can not be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt single throw
- FOREND: steel, 24 mm
- CASING: steel – protected against corrosion
- ROLLER: brass, regulation of deepness
- DEADBOLT: made of metal - zinc alloy
- TECHICAL INFORMATION: distance to cylinder 20/25/30/35/40 mm
- PACKAGING:
 - commercial - lock with screw in cardbox
 - commercial - lock with screw and cylinder 30x30 9,5 mm in skin pack
- Use only the cylinder with a cam 9,5 mm EN (DIN)

831/20, 25, 30, 35, 40

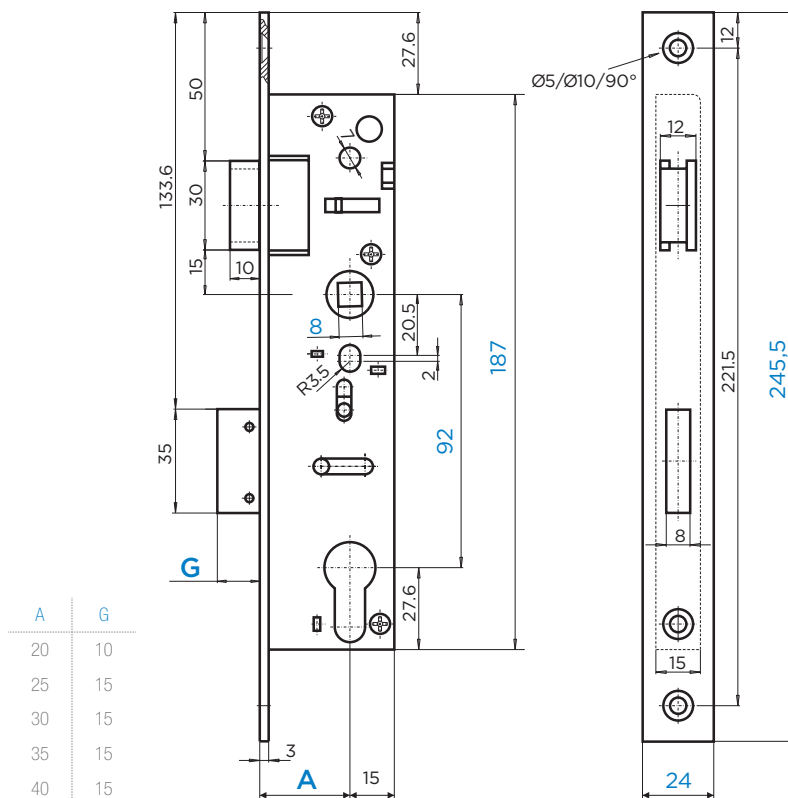

HR

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - s podizačem - jezičak se uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - jedan okretaj ključa
- ČEONA PLOČA: čelik, 24 mm
- TIJELO: čelik, zaštićeno od korozije
- JEZIČAK I ZASUN: metalni - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - standard 92 mm
 - dubina do sredine cilindra 20/25/30/35/40 mm
- **PAKIRANJE:**
 - trgovačko - brava s vijkom u kutiji, bez cilindra
 - trgovačko - brava s vijkom i cilindrom 30x30 9,5 mm u skinu
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)


SLO

- **FUNKCIJA:**
 - univerzalna, levo - desna
 - z vzvoda
 - za vhodna in notranja vrata do 60 kg
 - enojni zaklep
- ČELNICA: jeklo, 24 mm
- OHIŠJE: jeklo - zaščiteno proti koroziji
- VPAD IN ZAPAH: iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - standard 92 mm
 - razdalja do cilindra 20/25/30/35/40 mm
- **PAKIRANJE:**
 - trgovsko - ključavnica z vijkom v kartonski embalaži
 - trgovsko - ključavnica z vijkom in cilindrom 30x30 9,5 mm v skinu
- Uporabiti le cilindar s prstanom 9,5 mm EN (DIN)

EN

- **FUNCTION:**
 - universal, left - right
 - with lever - the latch can be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt single throw
- FOREND: steel, 20 mm
- CASING: steel – protected against corrosion
- LATCH AND DEADBOLT: made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - standard 92 mm
 - distance to cylinder 20/25/30/35/40 mm
- **PACKAGING:**
 - commercial - lock with screw in cardboard
 - commercial - lock with screw and cylinder 30x30 9,5 mm in skin pack
- Use only the cylinder with a cam 9,5 mm EN (DIN)

820/50 (820*)

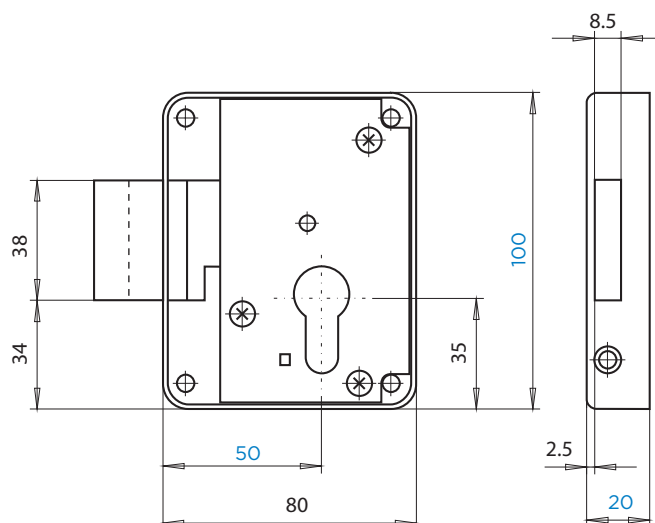

HR

- FUNKCIJA:
 - posebno lijevo/desno
 - za ulazna i unutarnja vrata do 60 kg
 - dva okretaja ključa
- TIJELO: čelik, zaštićeno od korozije-lakirano
- ZASUN: metalni - cinkova legura
- TEHNIČKE INFORMACIJE: dubina do sredine cilindra 50 mm
- PAKIRANJE:
 - trgovačko - brava u skinu, bez polucilindra
 - trgovačko - brava s vijkom i polucilindrom 10x30 mm u skinu
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)

SLO




- FUNKCIJA:
 - levo - desna
 - za vhodna in notranja vrata do 60 kg
 - dvojni zaklep
- OHIŠJE: jeklo - zaščiteno proti koroziji
- ZAPAH: iz kovine (cinkova zlitina)
- TEHNIČNE INFORMACIJE: razdalja do cilindra 50 mm
- PAKIRANJE:
 - trgovsko - ključavnica v skinu, brez polcilindra
 - trgovsko - ključavnica z vijkom in polcilindrom 10x30 mm v skinu
- Uporabiti le cilindar s prstanom 9,5 mm EN (DIN)

EN

- FUNCTION:
 - left or right
 - for entrance and inner door of up to 60 kg
 - deadbolt double throw
- FOREND: steel, 20 mm
- CASING: steel – protected against corrosion
- LATCH AND DEADBOLT: made of metal - zinc alloy
- TECHICAL INFORMATION: distance to cylinder 50 mm
- PACKAGING:
 - commercial - lock in skin pack, without half-cylinder
 - commercial - lock with screw and half-cylinder 10x30 mm in skin pack
- Use only the cylinder with a cam 9,5 mm EN (DIN)

* stara šifra stara koda previous code

EUROPORTAL-EP-SL (823*)

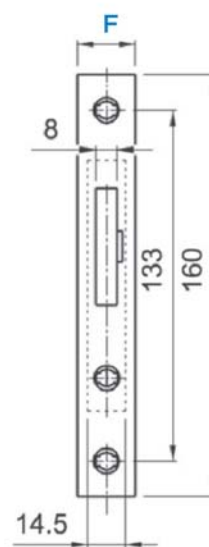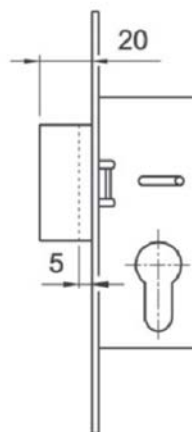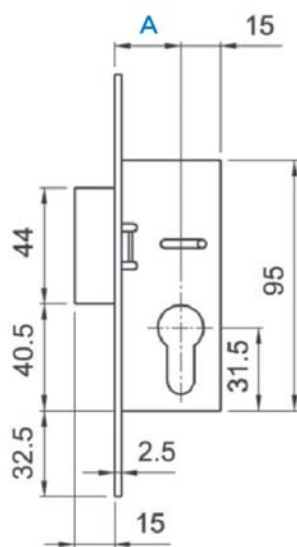A	F
20	
25	
30	
35	16/18/20/22/24
40	
45	
50	

HR

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - za ulazna i unutarnja vrata do 60 kg
 - jedan okretaj ključa
- **ČEONA PLOČA:**
 - čelik, opcija inox
 - 16/18/20/22/24 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **ZASUN:**
 - metalni
 - zasun zaštićen od piljenja; izlazi 15 mm, opcija 20 mm
 - opcija porotupožarnost
- **TEHNIČKE INFORMACIJE:** dubina do sredine cilindra 20/25/30/35/40/45/50 mm
- **PAKIRANJE:** trgovačko - brava s vijakom u kutiji
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)

(stara brava 823 je imala dubinu do cilindra 24 mm i čeonu ploču 24 mm)

* stara šifra [stara koda](#) previous code

SLO

- **FUNKCIJA:**
 - univerzalna, levo - desna
 - za vhodna in notranja vrata do 60 kg
 - enojni zaklep
- **ČELNICA:**
 - jeklo, možnost inox
 - 16/18/20/22/24 mm
- **OHIŠJE:** jeklo - zaštićeno proti koroziji
- **ZAPAH:**
 - iz kovine
 - zapah zaščitán proti žaganju; zaklepna razdalja 15 mm - možnost 20 mm
 - možnost - ognjeodpornost
- **TEHNIČNE INFORMACIJE:** razdalja do cilindra 20/25/30/35/40 mm
- **PAKIRANJE:** trgovsko – ključavnica z vijakom v kartonski embalaži
- Uporabiti le cilindar s prstanom 9,5 mm EN (DIN)


(stara ključavnica 823 je imala razdaljo do cilindra 24 mm i čelnico 24 mm)

EN

- **FUNCTION:**
 - universal, left - right
 - for entrance and inner door of up to 60 kg
 - deadbolt single throw
- **FOREND:**
 - steel, option inox
 - 16/18/20/22/24 mm
- **CASING:** steel - protected against corrosion
- **DEADBOLT:**
 - made of metal
 - deadbolt protected against sawing; deadbolt action 15 mm - option 20 mm
 - option - fire proof
- **TECHICAL INFORMATION:** distance to cylinder 20/25/30/35/40/45/50 mm
- **PACKAGING:** commercial - lock with forend and screw in cardboard
- Use only the cylinder with a cam 9,5 mm EN (DIN)

(the old lock 823 had distance to cylinder 24 mm and forend 24 mm)

EUROPOTAL-EP

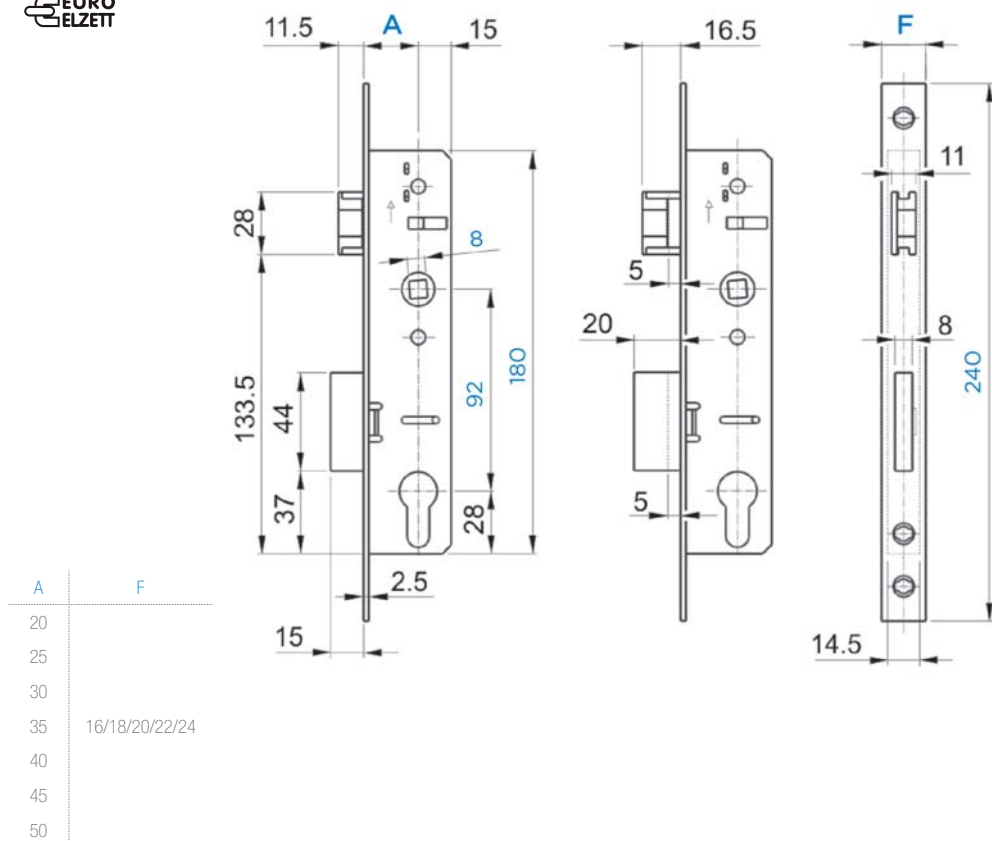EURO
ELZETT

HR

SLO

EN

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - bez podizača - jezičak se ne uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - jedan okretaj ključa
- **ČEONA PLOČA:**
 - čelik, opcija inox
 - 16/18/20/22/24 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:**
 - metalni
 - zasun zaštićen od piljenja; izlazi 15 mm, opcija 20 mm
 - opcija protupožarnost
 - jezičak - opcija protupožarnost
- **TEHNIČKE INFORMACIJE:**
 - standard 92 mm
 - dubina do sredine cilindra 20/25/30/35/40/45/50 mm
- **PAKIRANJE:** trgovačko - brava s vijakom u kutiji
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)

- **FUNKCIJA:**
 - univerzalna, levo - desno
 - brez vzvoda
 - za vhodna in notranja vrata do 60 kg
 - enojni zaklep
- **ČELNICA:**
 - jeklo, možnost inox
 - 16/18/20/22/24 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VPAD IN ZAPAH:**
 - iz kovine
 - zapah zaščiteno proti žaganju; zaklepna razdalja 15 mm - možnost 20 mm
 - vpad - možnost ognjeodpornost
- **TEHNIČNE INFORMACIJE:**
 - standard 92 mm
 - razdalja do cilindra 20/25/30/35/40/45/50 mm
- **PAKIRANJE:** : trgovsko - ključavnica z vijakom v kartonski embalaži
- Uporabiti le cilindar s prstanom 9,5 mm EN (DIN)


- **FUNCTION:**
 - universal, left - right
 - without lever - the latch can not be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt single throw
- **FOREND:**
 - steel, option inox
 - 16/18/20/22/24 mm
- **CASING:** steel – protected against corrosion
- **LATCH AND DEADBOLT:**
 - made of metal
 - deadbolt protected against sawing; deadbolt action 15 mm - option 20 mm
 - latch: optional fireproof
- **TECHICAL INFORMATION:**
 - standard 92 mm
 - distance to cylinder 20/25/30/35/40/45/50 mm
- **PACKAGING:** commercial - lock with forend and screws in cardboard
- Use only the cylinder with a cam 9,5 mm EN (DIN)

VEKTOR-VE



EURO
ELZETT

A
25
30
35

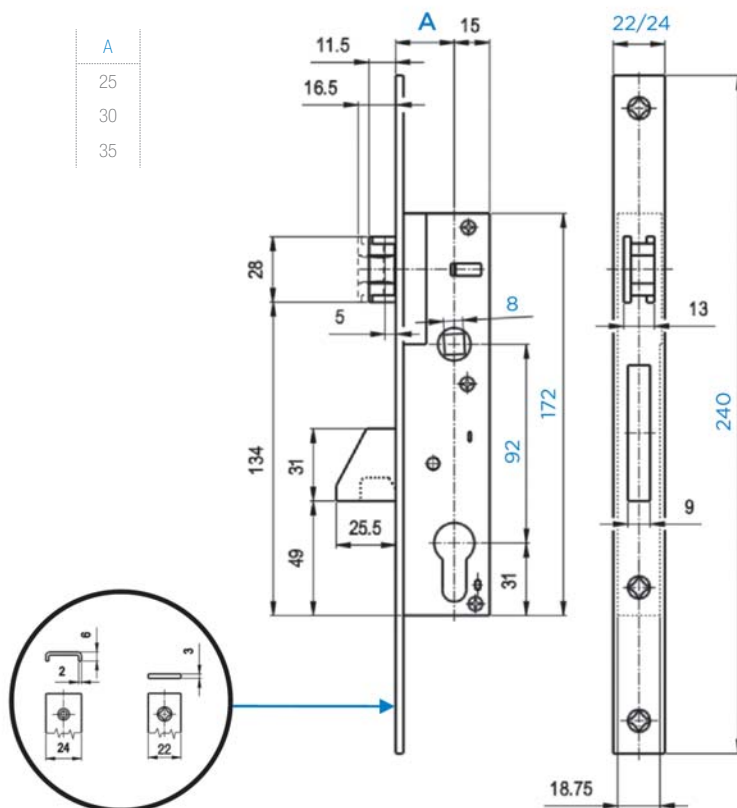

HR

SLO


EN

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - bez podizača - jezičak se ne uvlači okretanjem ključa
 - za ulazna i unutarnja vrata do 60 kg
 - jedan okretaj ključa
- **ČEONA PLOČA:**
 - čelik, opcija inox
 - ravna ili "U" oblik
 - 22/24 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:**
 - metalni
 - zasun: ravni ili kljun, radijalno pomicanje
- **TEHNIČKE INFORMACIJE:**
 - standard 92 mm
 - dubina do sredine cilindra 25/30/35 mm
- **PAKIRANJE:** trgovačko - brava s vijkom u kutiji
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)

- **FUNKCIJA:**
 - univerzalna, levo - desna
 - brez vzvoda
 - za vhodna in notranja vrata do 60 kg
 - enojni zaklep
- **ČELNICA:**
 - jeklo, možnost inox
 - ravna ali "U" oblika
 - 22/24 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VPAD IN ZAPAH:**
 - iz kovine
 - zapah: raven ali kavelj, radijalen pomik
- **TEHNIČNE INFORMACIJE:**
 - standard 92 mm
 - razdalja do cilindra 25/30/35 mm
- **PAKIRANJE:** trgovsko – ključavnica z vijakom v kartonski embalaži
- Uporabiti le cilindar s prstanom 9,5 mm EN (DIN)

- **FUNCTION:**
 - universal, left - right
 - without lever - the latch can not be operated by cylinder key
 - for entrance and inner door of up to 60 kg
 - deadbolt single throw
- **FOREND:**
 - steel, option inox
 - flat or "U" shape
 - 22/24 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:**
 - made of metal
 - deadbolt: level and hook, radial shift
- **TECHICAL INFORMATION:**
 - standard 92 mm
 - distance to cylinder 25/30/35 mm
- **PACKAGING:** commercial - lock with forend and screws in cardbox
- Use only the cylinder with a cam 9,5 mm EN (DIN)

VEKTOR-SL

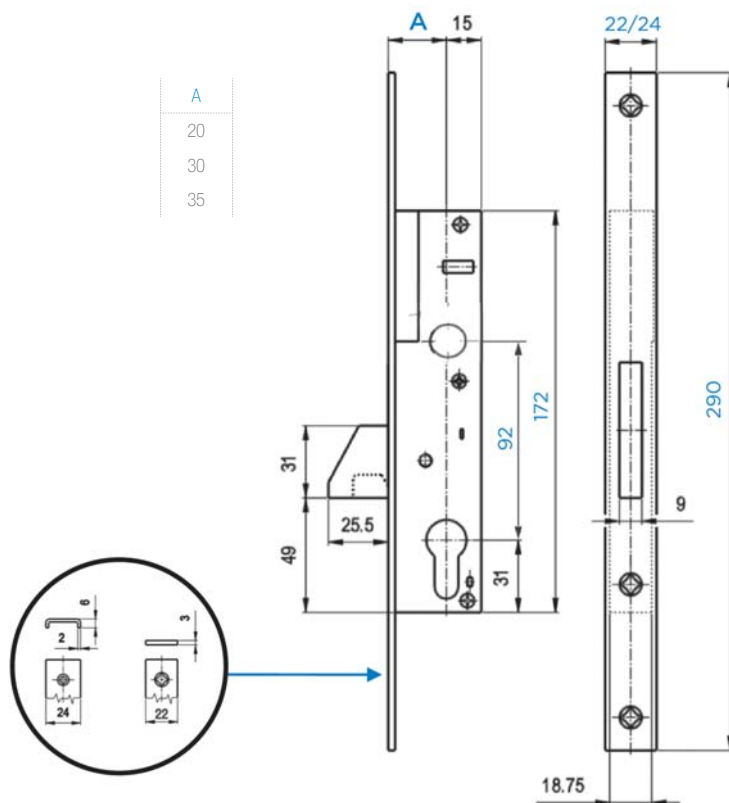HR

- **FUNKCIJA:**
 - univerzalna lijevo/desno
 - za ulazna i unutarnja vrata do 60 kg
 - jedan okretaj ključa
- **ČEONA PLOČA:**
 - čelik, opcija inox
 - ravna ili "U" oblik
 - 22/24 mm
- **TIJELO:** čelik, zaštićeno od korozije
- **JEZIČAK I ZASUN:**
 - metalni
 - zasun: ravni ili kljun, radijalno pomicanje
- **TEHNIČKE INFORMACIJE:**
 - standard 92 mm
 - dubina do sredine cilindra 20/30/35 mm
- **PAKIRANJE:** trgovačko - brava s vijkom u kutiji
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)

SLO

- **FUNKCIJA:**
 - univerzalna, levo - desna
 - za vhodna in notranja vrata do 60 kg
 - enojni zaklep
- **ČELNICA:**
 - jeklo, možnost inox
 - ravna ali "U" oblika
 - 22/24 mm
- **OHIŠJE:** jeklo - zaščiteno proti koroziji
- **VPAD IN ZAPAH:**
 - iz kovine
 - zapah: raven ali kavelj, radijalen pomik
- **TEHNIČNE INFORMACIJE:**
 - standard 92 mm
 - razdalja do cilindra 25/30/35 mm
- **PAKIRANJE:** trgovsko – ključavnica z vijakom v kartonski embalaži
- Uporabiti le cilindar s prstanom 9,5 mm EN (DIN)

EN

- **FUNCTION:**
 - universal, left - right
 - for entrance and inner door of up to 60 kg
 - deadbolt single throw
- **FOREND:**
 - steel, option inox
 - flat or "U" shape
 - 22/24 mm
- **CASING:** steel - protected against corrosion
- **LATCH AND DEADBOLT:**
 - made of metal
 - deadbolt: level and hook, radial shift
- **TECHICAL INFORMATION:**
 - standard 92 mm
 - distance to cylinder 20/30/35 mm
- **PACKAGING:** commercial - lock with forend and screws in cardbox
- Use only the cylinder with a cam 9,5 mm EN (DIN)




SIGURNOSNE BRAVE
VARNOSTNE KLJUČAVNICE
SECURITY LOCKS

784



BOJA BARVA COLOUR

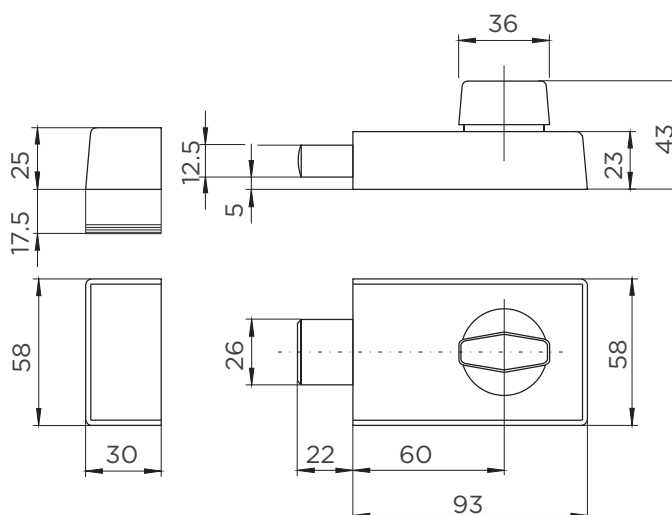

HR

- **FUNKCIJA:**
 - dodatna sigurnosna brava
 - univerzalno lijevo/desno
 - za ulazna i unutarnja vrata
 - zasun s unutarnje strane zaključavamo gumbom, a s vanjske ključem
 - dva okretaja ključa
- **TIJELO, PRIHVATNIK, ZASUN, GUMB, ROZETA I VDC CILINDAR:** metalno - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - montaža na vrata debljine 38 - 79 mm
 - bitno prihvatnik učvrstiti sidrenim vijkom u zid
- **PAKIRANJE:**
 - trgovačko - brava s cilindrom VDC, prihvatnikom i vijcima u blisteru
 - trgovačko - brava s prihvatnikom i vijcima u blisteru
- Koristiti samo cilindar TITAN VDC ili DOM 555 P (razni profili)

SLO

- **FUNKCIJA:**
 - dodatna varnostna ključavnica
 - univerzalna, levo - desna
 - zapah zaklepamo zunaj s ključem, znotraj z gumbom
 - za vhodna in notranja vrata
 - dvojni zaklep
- **OHIŠJE, PRIJEMNIK, ZAPAH, GUMB, ROZETA IN VDC CILINDER:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - montaža na vrata debeline od 38 - 79 mm
 - možna kvalitetna pritrditev prijemnika skozi luknjo v sredini s posebnim sidrnim vijakom neposredno v zid
- **PAKIRANJE:**
 - trgovsko - ključavnica s cilindrom VDC, prijemnikom in vijaki v preklonici
 - trgovsko - ključavnica, prijemnikom in vijaki v preklonici
- Uporabiti le cilindar TITAN VDC ili DOM 555 P (razni profili)


EN

- **FUNCTION:**
 - security-additional rim lock
 - universal, left - right
 - deadbolt operating from outside by the key and from inside by the knob
 - for entrance and inner door
 - deadbolt double throw
- **HOUSING, STRIKING PLATE, DEADBOLT, KNOB, ROSETTE AND CYLINDER VDC:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - quality fixing of the striking plate into the wall is possible with anchor screw
 - instalation in door thickness 38 - 79 mm
- **PACKAGING:**
 - commercial - lock with cylinder VDC, striking plate and screws in blister pack
 - commercial - lock, striking plate and screws in blister pack
- Use only the cylinder TITAN VDC or DOM 555 P (various profiles)

784 V



BOJA BARVA COLOUR

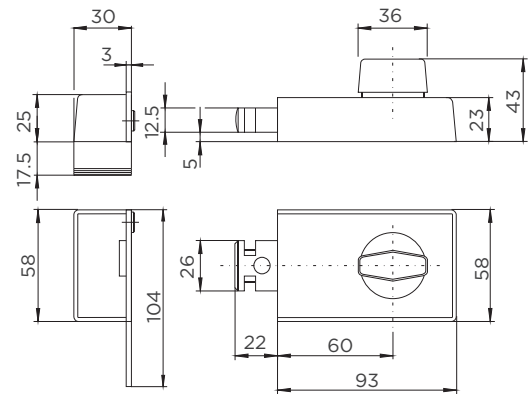

HR

- **FUNKCIJA:**
 - dodatna sigurnosna brava
 - univerzalno lijevo/desno
 - za ulazna i unutarnja vrata
 - sigurnosne škarice
 - zasun s unutarnje strane zaključavamo gumbom, a s vanjske ključem
 - dva okretaja ključa
- **TIJELO, PRIHVATNIK, ZASUN, GUMB, ROZETA I VDC CILINDAR:** metalno - cinkova legura
- **TEHNIČKE INFORMACIJE:**
 - montaža na vrata debljine 38 - 79 mm
 - bitno prihvatičnik učvrstiti sidrenim vijkom u zid
- **PAKIRANJE:**
 - trgovačko - brava s cilindrom VDC, prihvatnikom i vijcima u blisteru
 - trgovačko - brava s prihvatnikom i vijcima u blisteru
- Koristiti samo cilindar TITAN VDC ili DOM 555 P (razni profili)


SLO

- **FUNKCIJA:**
 - dodatna varnostna ključavnica
 - univerzalna, levo - desna
 - zapah zaklepamo zunaj s ključem, znotraj z gumbom
 - za vhodna in notranja vrata
 - varovalo
 - dvojni zaklep
- **OHIŠJE, PRIJEMNIK, ZAPAH, GUMB, ROZETA IN VDC CILINDER:** iz kovine (cinkova zlitina)
- **TEHNIČNE INFORMACIJE:**
 - montaža na vrata debeline od 38 - 79 mm
 - možna kvalitetna pritrditev prijemnika skozi luknjo v sredini s posebnim sidrnim vijakom neposredno v zid
- **PAKIRANJE:**
 - trgovsko - ključavnica s cilindrom VDC, prijemnikom in vijaki v preklonici
 - trgovsko - ključavnica, prijemnikom in vijaki v preklonici
- Uporabiti le cilindar TITAN VDC ili DOM 555 P (razni profili)

EN

- **FUNCTION:**
 - security-additional rim lock
 - universal, left - right
 - for entrance and inner door
 - safety lever
 - deadbolt operating from outside by the key and from inside by the knob
 - deadbolt double throw
- **HOUSING, STRIKING PLATE, DEADBOLT, KNOB, ROSETTE AND CYLINDER VDC:** made of metal - zinc alloy
- **TECHICAL INFORMATION:**
 - quality fixing of the striking plate into the wall is possible with anchor screw
 - instalation in door thickness 38 - 79 mm
- **PACKAGING:**
 - commercial - lock with cylinder VDC, striking plate and screws in blister pack
 - commercial - lock, striking plate and screws in blister pack
- Use only the cylinder TITAN VDC or DOM 555 P (various profiles)

VDC

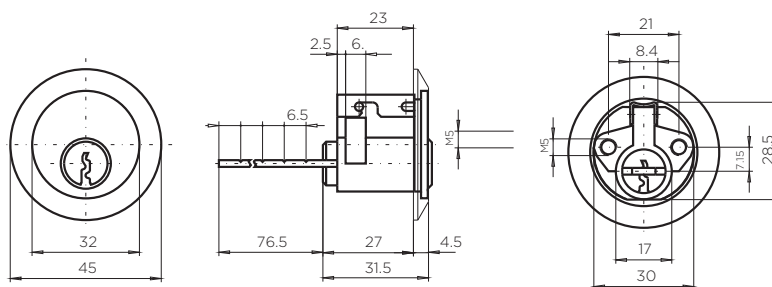

HR

- MOGUĆI PROFILI: K1, K5, K55, K56, K66, T100RX, T200
 - K1 - 3 ključa
 - K5, K55, K56, T100RX, T200 - 4 ključa
- Dva pričvrtna vijka*: M5 X 40 mm - čelik Zn, za vrata debljine 38 do 55 mm
- PAKIRANJE: trgovačko - cilindar, zasun, ključevi, rozeta i 2 pričvrtna vijka

* Po narudžbi isporučujemo dulje pričvrtna vijke.

SLO

- LASTNOSTI KOT PROFILNI CILINDRI: K1, K5, K55, K56, K66, T100RX, T200
 - K1 - 3 ključ
 - K5, K55, K56, T100RX, T200 - 4 ključ
- Dva pritrdilna vijaka*: M5 x 40 mm - jeklo Zn, za debelino vrat od 38 do 55 mm
- PAKIRANJE: trgovsko - cilindar, zapah, rozeta in dva pritrdilna vijaka


* Po želji dobavimo tudi daljše vijake in pritrdilno ploščo.

EN

- Features such as profile cylinders: K1, K5, K55, K56, K66, T100RX, T200
 - K1 - 3 keys
 - K5, K55, K56, T100RX, T200 - 4 keys
- Two fixing screws*: M5 x 40 mm - steel Zn, for thickness of the door from 38 to 55 mm
- Packaging: commercial - cylinder, latch, rosette and two fixing screws.

* We also supply longer cams and mounting plate.

555 P

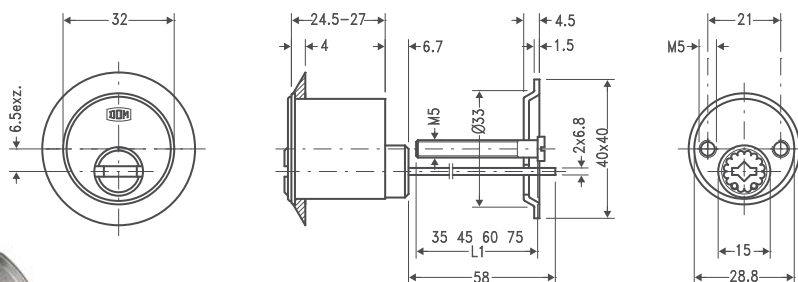DOM
TECHNOLOGIES

HR

- MOGUĆI PROFILI DOM: RS Sigma Plus, ix DAS, ix Gamma, ix 6 SR, ix Saturn, diamant
- 3 ključa
- Dva pričvrtna vijka*: M5 X 35 mm - čelik Zn, za vrata debljine 38 do 50 mm
- PAKIRANJE: cilindar, zasun i njegova matica, ključevi, rozeta i 2 pričvrtna vijka

* Po narudžbi isporučujemo dulje pričvrtna vijke.

SLO

- LASTNOSTI KOT PROFILNI CILINDR DOMi: RS Sigma Plus, ix DAS, ix Gamma, ix 6 SR, ix Saturn, diamant
- Trije ključ
- Dva pritrdilna vijaka*: M5 x 35 mm - jeklo Zn, za debelino vrat od 38 do 50 mm
- PAKIRANJE: posamično s ključ, zapah in matica, rozeta in pritrdilna vijaka

* Po želji dobavimo tudi daljše vijake in pritrdilno ploščo.

EN




- FEATURES SUCH AS DOM PROFILE CYLINDERS: RS Sigma Plus, ix DAS, ix Gamma, ix 6 SR, ix Saturn, diamant
- Three keys
- Two fixing screws*: M5 x 35 mm - steel Zn, for thickness of the door from 38 to 50 mm
- PACKAGING: keys, cam and nut, a rosette and fixing screws

* We also supply longer screws and mounting plate.

1600



POWERED BY
LA
SERRATURE

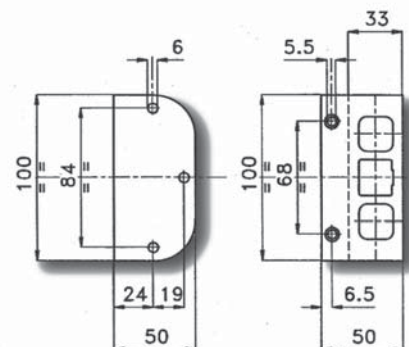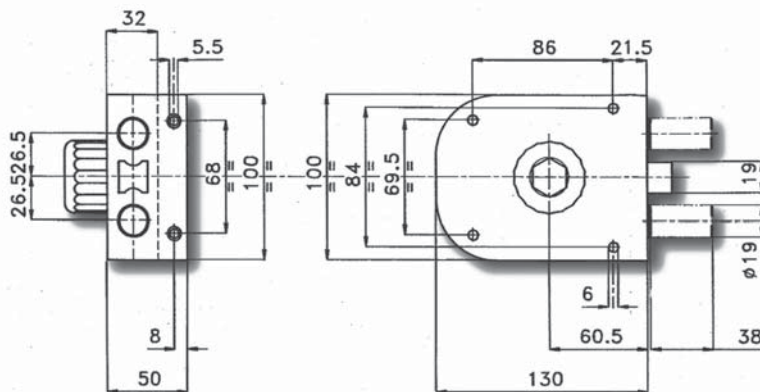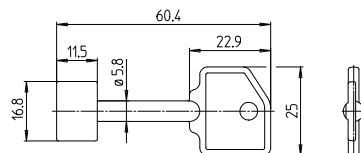

HR

- **FUNKCIJA:**
 - dodatna sigurnosna brava
 - pumpa cilindar na vanjskoj strani, a gumb iznutra
 - posebno lijevo/desno (suprotno od DIN)
 - za ulazna i unutarnja vrata
 - zasune s unutarnje strane zaključavamo gumbom, a s vanjske ključem
 - dva okretaja ključa
- **TIJELO I PRIHVATNIK:**
 - čelik lakirano
 - svi unutarnji dijelovi brave su od čelika
- **TEHNIČKE INFORMACIJE:**
 - montaža na vrata debljine 38 - 79 mm
 - pumpa cilindar 50, 60, 70 ili 80 mm
- **PAKIRANJE:** trgovsko - brava s pumpa cilindrom i 3 ključa, prihvatom, rozetama i vijcima u kutiji


SLO

- **FUNKCIJA:**
 - dodatna varnostna ključavnica
 - potisni cilindar na zunanji strani, vrtljiv gumb na notranji strani
 - leva ali desna (nasprotno od DIN)
 - zapah zaklepamo zunaj s ključem, znotraj z gumbom
 - za vhodna in notranja vrata
 - dvojni zaklep
- **OHIŠJE, PRIJEMNIK:**
 - jeklo lakirano
 - notranji elementi: jeklo
- **TEHNIČNE INFORMACIJE:**
 - montaža na vrata debeline od 38 - 79 mm
 - potisni cilindar 50, 60, 70 ili 80 mm
- **PAKIRANJE:** trgovsko - ključavnica s potisnim cilindrom im 3 ključ, prijemnikom, rozetama in vijaki v kartonski embalaži




EN


- **FUNCTION:**
 - security-additional rim lock
 - push cylinder on the outside and turning knob on the inside
 - left or right (opposite from DIN)
 - deadbolt operating from outside by the key and from inside by the knob
 - for entrance and inner door
 - deadbolt double throw
- **HOUSING, STRIKING PLATE:**
 - steel, painted
 - Internal components: steel
- **TECHICAL INFORMATION:**
 - instalation in door thickness 38 - 79 mm
 - push cylinder 50, 60, 70 or 80 mm
- **PACKAGING:** commercial - lock with push cylinder and 3 keys, striking plate, rosette and screws in cardboard

3300

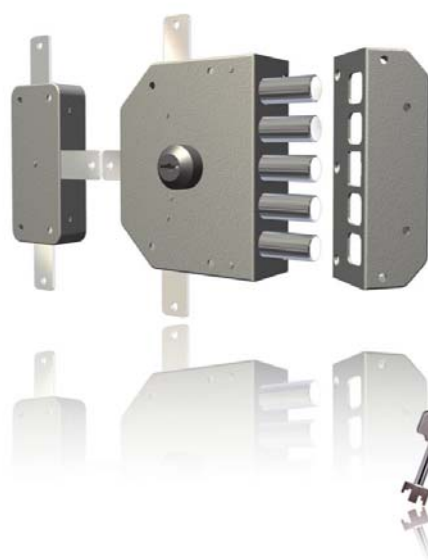

POWERED BY
AR
SERRATURE

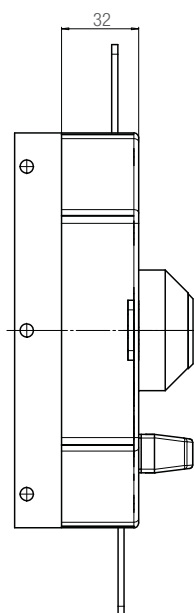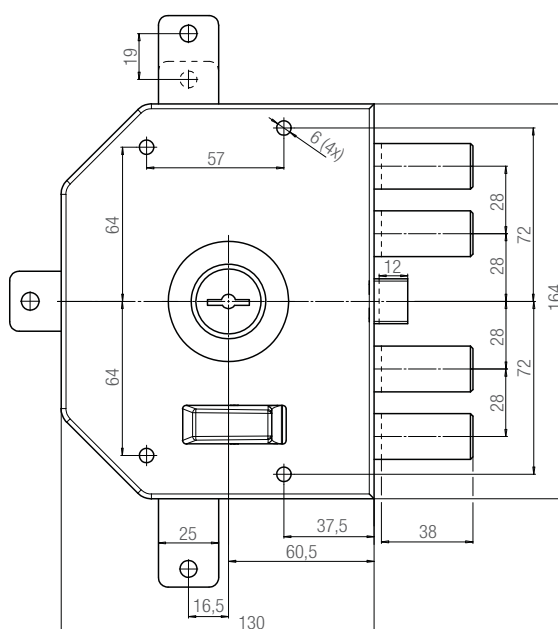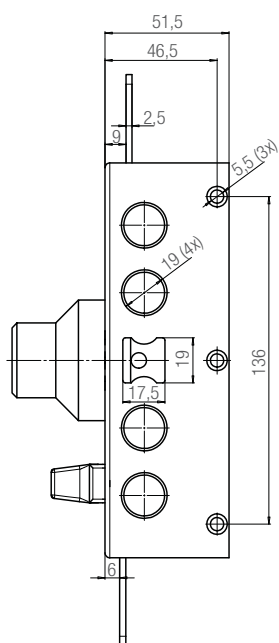

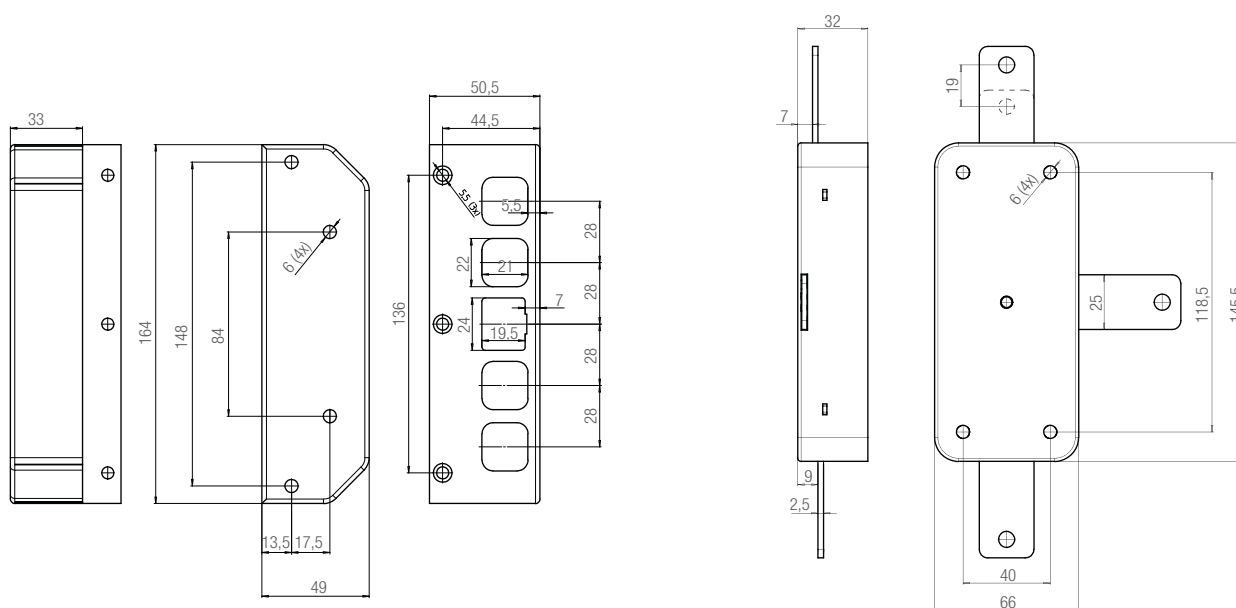

HR

- FUNKCIJA:
 - nadgradbena sigurnosna brava
 - pumpa cilindar
 - posebno lijevo/desno (suprotno od DIN)
 - za ulazna i unutarnja vrata
 - zasune s unutarnje strane zaključavamo ključem ili gumbom, a s vanjske ključem
 - dva okretaja ključa
- BROJ TOČAKA ZAKLJUČAVANJA:
 - 3300: H-sistem, 5 točaka zaključavanja
 - 3200: polu H-sistem, 3 točke zaključavanja
- OPCIJA IZVEDBE:
 - Izvedba s ključem: 3300 C, 3200 C
 - Izvedba s gumbom: 3300 P, 3200 P
- TIJELO I PRIHVATNIK:
 - čelik lakirano
 - svi unutarnji dijelovi brave su od čelika
- TEHNIČKE INFORMACIJE:
 - montaža na vrata debljine 38 - 79 mm
 - pumpa cilindar 50, 60, 70 ili 80 mm
- PAKIRANJE: trgovačko - brava s pumpa cilindrom i 3 ključa, prihvatnikom, rozetama i vijcima u kutiji.

Pogonske palice se naručuju odvojeno! Potrebno je: CR 90-01 i CR 93-01
Može se naručiti 3 modela pumpa cilindra: standardni, K55 ili T200.

SLO

- FUNKCIJA:
 - varnostna ključavnica
 - potisni cilindar na zunanji strani, vrtljiv gumb ali ključ na notranji strani
 - leva ali desna (nasprotno od DIN)
 - zapah zaklepamo zunaj s ključem, znotraj z gumbom ali ključem
 - za vhodna in notranja vrata
 - dvojni zaklep
 - ŠTEVILO ZAKLEPNIH TOČK:
 - 3300: H-sistem, 5 točk zaklepanja
 - 3200: polu H-sistem, 3 točke zaklepanja
- IZVEDBE:
 - Izvedba s ključem: 3300 C, 3200 C
 - Izvedba z gumbom: 3300 P, 3200 P
- OHIŠJE, PRIJEMNIK:
 - jeklo lakirano
 - notranji elementi: jeklo
- TEHNIČNE INFORMACIJE:
 - montaža na vrata debeline od 38 - 79 mm
 - potisni cilindar 50, 60, 70 ili 80 mm
- PAKIRANJE: trgovsko - ključavnica s potisnim cilindrom im 3 ključi, prijemnikom, rozetama in vijaki v kartonski embalaži



Pogonske palice se naročajo posebej! Možne so: CR 90-01
i CR 93-01
Lahko se naruči 3 modele pumpe cilindra: standardni, K55
ali T200

EN

- **FUNCTION:**
 - Multi-Point Rim Locks
 - external pushing cylinder
 - left or right (opposite from DIN)
 - for entrance and inner door
 - deadbolt operating from outside by the key and from inside by the knob or key
 - deadbolt double throw
- **CLOSURE FOLDS NUMBER:**
 - 3300: H-system, fivefold closure
 - 3200: half H-system, threefold closure
- **VERSIONS:**
 - Key version: 3300 C, 3200 C
 - Knob version: 3300 P, 3200 P
- **HOUSING, STRIKING PLATE:**
 - steel, painted
 - internal components: steel
- **TECHICAL INFORMATION:**
 - instalation in door thickness 38 - 79 mm
 - push cylinder 50, 60, 70 or 80 mm
- **PACKAGING:** commercial - lock with push cylinder and 3 keys, striking plate, rosette and screws in cardboard

Telescopic rods for fivefold closure need to be ordered separately: CR 90-01 i CR 93-01
Push cylinder can be ordered in 3 versions: standard, K55 or T200.

793

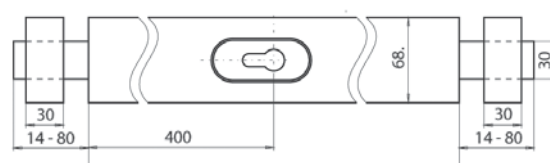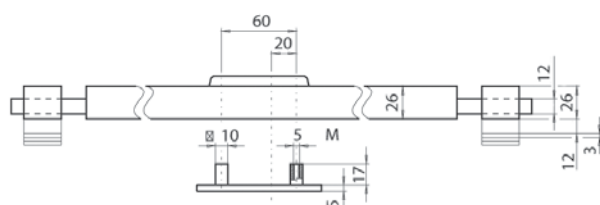

BOJA BARVA COLOUR



HR

- FUNKCIJA:**
 - poprečna sigurnosna brava
 - univerzalno lijevo/desno
 - za ulazna i unutarnja vrata
 - zasun s unutarnje strane zaključavamo ključem ili gumbom, a s vanjske ključem
 - dva okretaja ključa
- POKLOPAC BRAVE I PRIHVATNIKA:** Al lakirano
- SIGURNOSNA ROZETA:**
 - kaljeni čelik
 - svi unutarnji dijelovi brave su od čelika
- TEHNIČKE INFORMACIJE:**
 - montaža na vrata debljine od 38 mm nadalje
 - bitno prihvatnike učvrstiti sidrenim vijkom u zid
 - produženje zasuna 3 x 22 mm
 - 793-800 za vrata širine 800 - 950 mm
 - 793-900 za vrata širine 900 - 1050 mm
- PAKIRANJE:**
 - trgovačko - brava s cilindrom 30x55 9,5 mm, prihvatnicima, sigurnosnom rozetom i vijcima u kutiji
 - trgovačko - brava s prihvatnicima, sigurnosnom rozetom i vijcima u kutiji
- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)
- Može se naručiti s bilo kojim modelom cilindra TITAN i DOM

SLO

- FUNKCIJA:**
 - prečna zapora - varnostna ključavnica
 - univerzalna, levo - desna
 - zapah zaklepamo zunaj s ključem, znotraj z gumbom ali ključem
 - za vhodna in notranja vrata
 - dvojni zaklep
- POKROV KLJUČAVNICE IN PRIJEMNIKA:** Al lakirano
- ZUNANJI ŠČIT:**
 - jeklo kaljeno in lakirano
 - notranji elementi: jeklo
- TEHNIČNE INFORMACIJE:**
 - vgradnje v vrata debeline od 38 mm in več
 - možna kvalitetna pritrditev prijemnika skozi luknjo v sredini s posebnim sidrenim vijakom neposredno v zid
 - možna obojestranska nastavitev zapaha - 3 krat po 22 mm
 - 793-800 za širino vrat 800 - 950 mm
 - 793-900 za širino vrat 900 - 1050 mm
- PAKIRANJE:**
 - trgovsko - ključavnica s cilindrom 30x55 9,5 mm, prijemniki, varnostna rozeta in vijaki v kartonski embalaži
 - trgovsko - ključavnica s prijemnikom, varnostna rozeta in vijaki v kartonski embalaži
- Uporabiti le cilindar s prstanom 9,5 mm (DIN)
- Možno je naročiti katerikoli model cilindra TITAN ali DOM.

EN

- FUNCTION:**
 - security cross bar door lock
 - universal, left - right
 - deadbolt operating from outside by the key and from inside by the knob or key
 - for entrance and inner door
 - deadbolt double throw
- COVER OF LOCK AND STRIKING PLATE:** Al painted
- SECURITY ESCUTCHEON:**
 - hardened steel, painted
 - internal components: steel
- TECHICAL INFORMATION:**
 - instalation in door thickness from 38 mm and many more
 - quality fixing of the striking plate into the wall is possible with anchor screw
 - 793-800 for door width 800 - 950 mm
 - 793-900 for door width 900 - 1050 mm
- PACKAGING:**
 - commercial - lock with cylinder 30x55 9,5 mm, striking plates, security rosette and screws in carton box
 - commercial - lock with striking plates, security rosette and screws in cardboard
- Use only the cylinder with a cam 9,5 mm EN (DIN)
- Can be ordered in set with any model of TITAN or DOM cylinder.

AFORA antipanic brava | antipanic ključavnica | antipanic lock



HR

SLO

EN



Izlaz za nuždu EN 179


- Za objekte/prostore koji nisu javni, poznat evakuacijski put, brava na kvaku (bez letve)
- engleski - fire exit
- Primjenjuje se u slučaju opasnosti kada nisu izgledne panične situacije.
- Izlaz za nuždu prema EN 179 za zgrade ili dijelove zgrade koji nisu otvoreni za javnost, odnosno posjetitelje te sva područja zgrade u koje posjetitelji slobodno mogu ući su isključena od primjene ovog standarda. Bočni ulazi u urede ili u takvu zgradu ili dijelove zgrade koriste ovlaštene osobe.
- Izlaz je pristupačan u svakom trenutku.
- **Brava za izlaz za nuždu se otvara pritiskom kvake.**
- Područja primjene:
 - Privatni stambeni kompleks
 - Školske učionice
 - Zgrade s administracijom ili industrijske tvrtke koje ne primaju posjetitelje
 - Područja zgrade s uredima administracije gdje nisu dozvoljeni posjetitelji
 - Područja zračnih luka, banaka, trgovačkih centara gdje nisu dozvoljeni posjetitelji
- Korisnici su upoznati s korištenjem izlaza za nuždu te poznaju evakuacijski put.
- Izvana se ne može utjecati na bravu.

Izhod v sili EN 179

- Za objekte/prostore, ki niso javni, znana smer evakuacije, ključavnica na kljuko (bez letve)
- angleško – fire exit
- Uporablja se v primeru nevarnosti, ko niso možne panične situacije.
- Izhod v sili po EN 179 za zgradbe ali delov zgradb, ki niso odprti za javnost, oziroma so področja zgradbe za obiskovalce ločena od tega dela.
- Izhod je možen v vsakem trenutku
- **Ključavnica za izhod v sili se odpira s pritiskom na kljuko.**
- Področja uporabe:
 - Privatne bivalne zgradbe
 - Šolske učilnice
 - Pisarniške in industrijske zgradbe
 - Javne ustanove, kjer niso predvideni obiskovalci
 - Področja letališč, bank in trgovskih centrov zaprta za javnost
- Uporabniki poznajo evakuacijske poti.
- Ključavnico ni mogoče odpirati z zunanje strani.

Emergency Exit Devices EN 179

- For objects/places which are not open to the public, familiar escape route, handle lock (without a bar)
- In cases of emergency, in which panic situations are not likely.
- This standard should be applied for emergency exits according to EN 179 for buildings or parts of buildings that are not open to the public, i.e. visitors, and for all areas inside buildings which visitors cannot freely enter. Side entrances to offices or to that type of buildings are used by authorised personnel.
- Exit at all times.
- **Emergency Exit Locking Device is opened using handle.**
- Scope of application:
 - Private Residential Complexes
 - Classrooms
 - Administration buildings or Manufacturing Companies which do not accept visitors
 - Parts of buildings with administrative offices, where no visitors are allowed
 - Parts of Airports, Banks and Shopping Malls where no visitors are allowed
- Users are able to use emergency exits and are familiar with the escape route.
- No influence on the lock is possible from the outside.

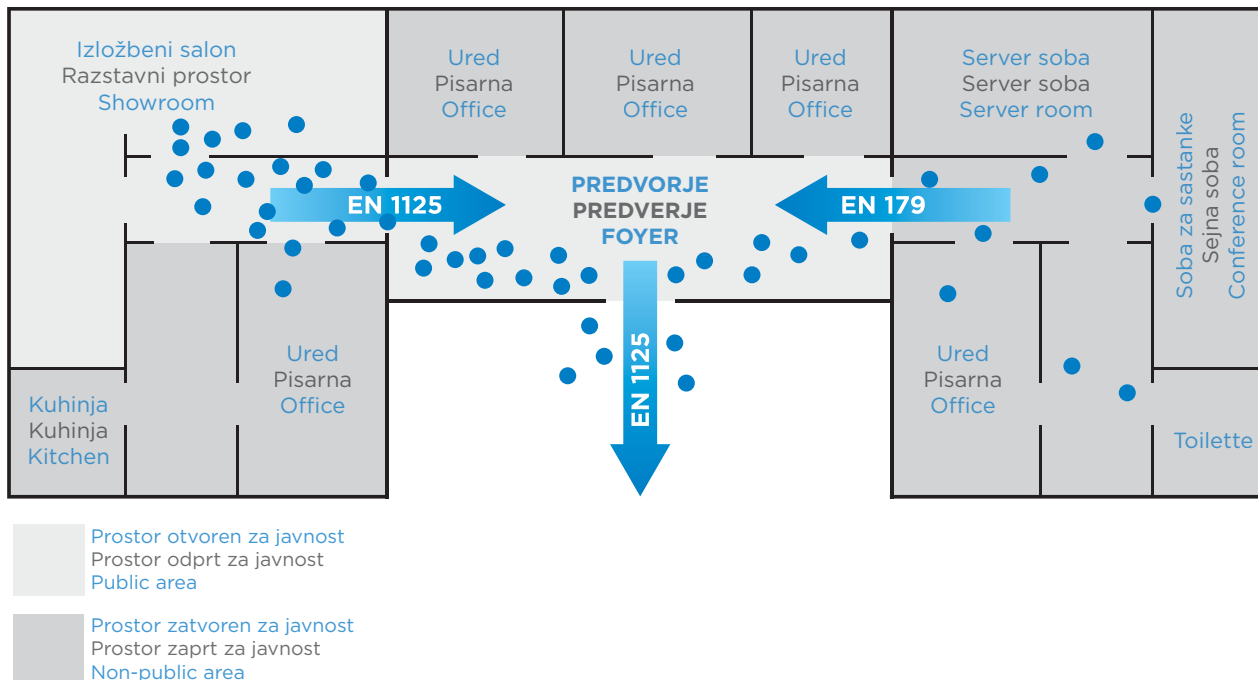

HR

SLO

EN

Evakuacijski izlaz s antipanik bravom EN 1125

- Za objekte/prostore koji su javni, potisna letva na bravi, korisnici ne poznaju funkcioniranje brave
- engleski - emergency exit
- Primjenjuje se u slučaju opasnosti kada su izgledne panične situacije.
- Antipanik brave za evakuacijske izlaze prema EN 1125 se koriste u javnim zgradama/objektima u kojima posjetitelji nisu upoznati s funkcioniranjem brave, odnosno vrata na evakuacijskim izlazima, ali ih moraju otvoriti bez uputa za korištenje.
- Izlaz je pristupačan u svakom trenutku.
- **Antipanik brave se otvaraju potiskivanjem horizontalne letve.**
- Područja primjene:
 - Bolnice i klinike
 - Evakuacijski izlazi u školama i športskim objektima
 - Objekti javne administracije
 - Stadioni, arene, zabavni centri
 - Trgovački centri
- Korisnici nemaju prethodno znanje kako se koristiti antipanik brava na evakuacijskim izlazima.
- Izvana se ne može utjecati na bravu.

Evakuacijski izhod z antipanic ključavnico EN 1125

- Za javne prostore, ko obiskovalci ne poznajo funkcije ključavnice
- angleško - emergency exit
- Uporablja se v primeru nevarnosti, ko lahko izbruhne panika.
- Ključavnica EN 1125 se uporablja v javnih prostorih, ko uporabniki niso seznanjeni z funkcijo ključavnice in jo lahko odprejo brez navodil za uporabo.
- Izhod je možen v vsakem trenutku.
- **Antipanič ključavnice se odpirajo s pritiskom na horizontalno letev.**
- Področje uporabe:
 - Bolnišnice
 - Evakuacijski izhodi v šolah in na športnih objektih
 - Drugi javni objekti
 - Zabavni centri
 - Trgovski centri
- Uporabniki niso seznanjeni z funkcijo ključavnice in jo lahko odprejo brez navodil za uporabo.
- Ključavnico ni mogoče odpirati z zunanje strani.

Anti-Panic Exit Devices EN 1125

- For objects/places which are open to the public, push bar lock, users have no previous knowledge about operating the device
- In cases of emergency, in which panic situations can be expected
- Anti-Panic Door Locks for emergency exits according to EN 1125 are used in public buildings/objects in which the visitors have no previous knowledge about operating the device, i.e. doors on emergency exits, which should be opened without consulting an user manual.
- Exit at all times.
- **Anti-Panic Door Lock is opened by pressure on the horizontal bar.**
- Scope of application:
 - Hospitals and clinics
 - Emergency exits in schools and sports facilities
 - Public administration buildings
 - Stadiums, arenas, entertainment centres
 - Shopping malls
- Users have no previous knowledge about operating the Anti-Panic Door Lock on the emergency exits.
- No influence on the lock is possible from the outside.

HR


- Brava, okov i pribor za montažu mogu se ugraditi samo kao provjerena i označena jedinica.
- Evakuacijska vrata sa unutarnje strane uvijek moraju pružati mogućnost izlaska prema van kako u otključanom tako i u zaključanom položaju, a njihovo otvaranje obavezno mora biti prema van. Razlog je vrlo jednostavan. U svim objektima javne namjene gdje postoji mogućnost sakupljanja djece ili ljudi postoji opasnost da ako iz bilo kojeg razloga dođe do panike te ljudi nasrnu na vrata vrata da se mogu otvoriti.
- Prema normi za antipanič brave EN 1125 i 179 obavezno je imati:
 - otvaranje prema van
 - 24-satnu mogućnost otvaranja vrata iznutra mehanički i kod nestanka struje
 - održati minimalnu propisanu prolaznu širinu vrata
 - mogućnost izvedbe na više načina ovisno o propisu i namjeni objekta.

SLO

- Ključavnica, okovje in pribor za montažo lahko vgradi samo pooblaščen oseba.
- Evakuacijska vrata morajo z notranje strani vedno omogočati izhod ne glede ali so zaklenjene ali odklenjene. Odpiranje mora biti vedno v smeri izhoda.
- Po standardu za antipanič ključavnice EN 1125 i 179 je obvezno:
 - odpiranje proti ven
 - 24-urno možnost odpiranje vrat od znotraj mehansko in primeru izpada električnega toka
 - zagotoviti minimalno prehodno širino
 - izvedba glede na predpise oziroma namen objekta

EN

- Lock, hardware and mounting kit can be installed only as a verified and marked component.
- Emergency doors should always permit exit from the inside to the outside, in both the locked and unlocked positions and should always open outwards. The reason is very simple. In all public purpose buildings, where the gathering of children or people is likely, panic situations in which people rush toward the door to open it can be expected for any reason.
- According to Standards for Panic Door Locks EN 1125 and 179, the following rules should be observed:
 - Doors should open outwards
 - It should be possible to open the door mechanically from the inside 24 hours a day, even when the power supply is interrupted
 - Minimum required passing width of the door should be kept
 - It should be possible to install the door in various ways, depending on the Regulation and the purpose of a building.

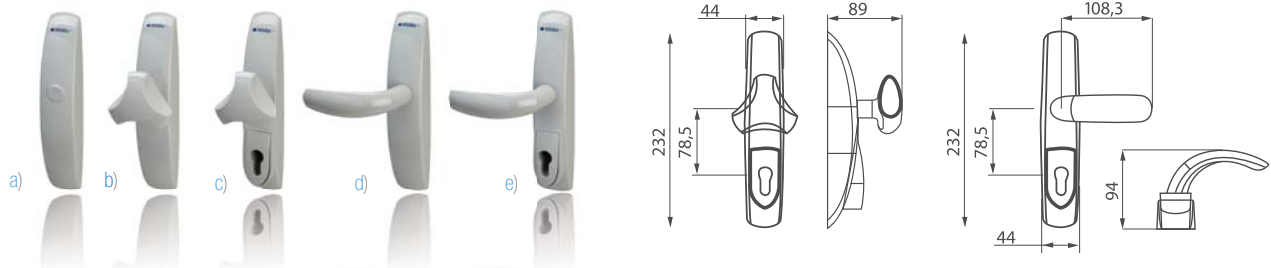

Tehničke specifikacije

- FUNKCIJA:
 - nadgradbena antipanič brava
 - 1, 2 ili 3 točke zaključavanja
 - univerzalno lijevo/desno
 - 200,000 ciklusa otvaranja
 - protupožarna
 - certifikat: 7 stupnjeva prema EN 1125
 - za ulazna i unutarnja vrata do 200 kg
 - s unutarnje strane ne zaključavamo
 - vanjsko otvaranje: nije moguće (a)
 - s kuglom (b)
 - s kuglom i polucilindrom (c)
 - s kvakom (d)
 - s kvakom i polucilindrom (e)
- NOSAČI LETVE I LETVA: površinska obrada: lakirana, siva (crna i bijela po narudžbi)
- PRIHVATNIK: čelik
- TEHNIČKE INFORMACIJE: montaža na jednokrlna vrata širine do 1200 mm
- PAKIRANJE: trgovačko - brava s nosačem letve, letvom, prihvatnikom i vijcima u kutiji.

Kvaka ili kugla na štitu ili samo štit se naručuju odvojeno!
Polucilindar se može naručiti bilo koji model TITAN ili DOM.

Tehnične specifikacije

- FUNKCIJA:
 - pribitna antipanič ključavnica
 - 1, 2 ali 3 točke zaklepanja
 - univerzalno levo/desno
 - 200,000 cikla odpiranja
 - protipožarna
 - certifi kat: 7 stopnja po EN 1125
 - za vhodna in notranja vrata do 200 kg
 - zaklepamo z notranje strani
 - odpiranje z zunanje strani: ni mogoče (a)
 - z bункo (b)
 - z bункo in polcilindrom (c)
 - s kljuko (d)
 - s kljuko in polcilindrom (e)
- NOSILCI LETEV: površinska obdelava: lakirana, siva (črna in bela po naročilu)
- PRIJEMNIK: jeklo
- TEHNIČNE INFORMACIJE: montaža na enokrlna vrata širine do 1200 mm
- PAKIRANJE: trgovsko – ključavnica z nosilcem letve, letev, prijemnik in vijaki v kartonski embalaži.


Kljuka ali bunka na štitu ili samo štit se naručuju ločeno!
Polcilindar se lahko naruči katerikoli model TITAN ili DOM.

Technical Specifications


- FUNCTION:
 - Rim Anti-Panic Lock
 - 1, 2 or 3 locking points
 - universally left/right
 - 200,000 cycles
 - fireproof
 - certificate: grade 7 according to EN 1125
 - for entrance and interior doors up to 200 kg
 - not locked from the inside
 - impossible to open the door from the outside (a)
 - with a knob (b)
 - with a knob and a half-cylinder (c)
 - with a door handle (d)
 - with a door handle and a half-cylinder (e)
- PUSH BAR AND PUSH BAR GIRDER: surface treatment: varnish, grey (black and white on request)
- STRIKE PLATE: steel
- TECHNICAL INFORMATION: installation on single-winged door of width up to 1200 mm
- PACKAGE: commercial – lock with push bar girder, push bar, strike plate and screws in the box.

Handle or knob on a shield or just a shield should be ordered separately! Half-cylinder can be ordered for any TITAN or DOM model.


2200 - 2 točke zatvaranja
2 točki zapiranja
2 points of closing

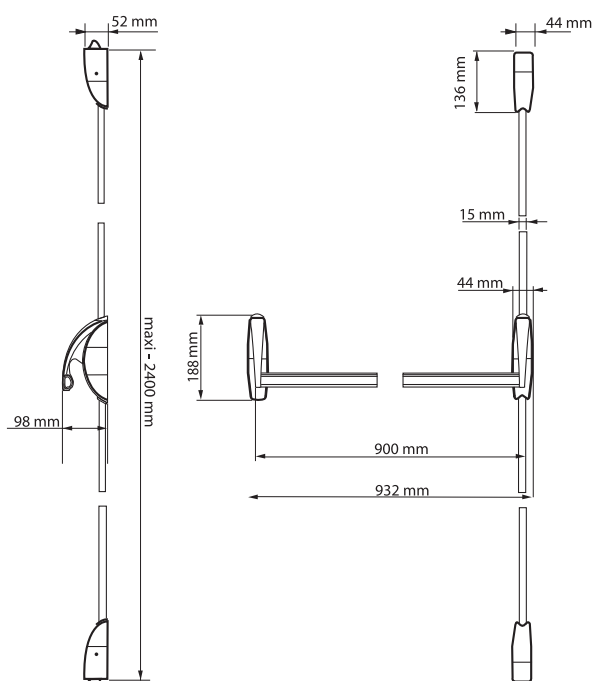


2300 - 3 točke zatvaranja
3 točki zapiranja
3 points of closing

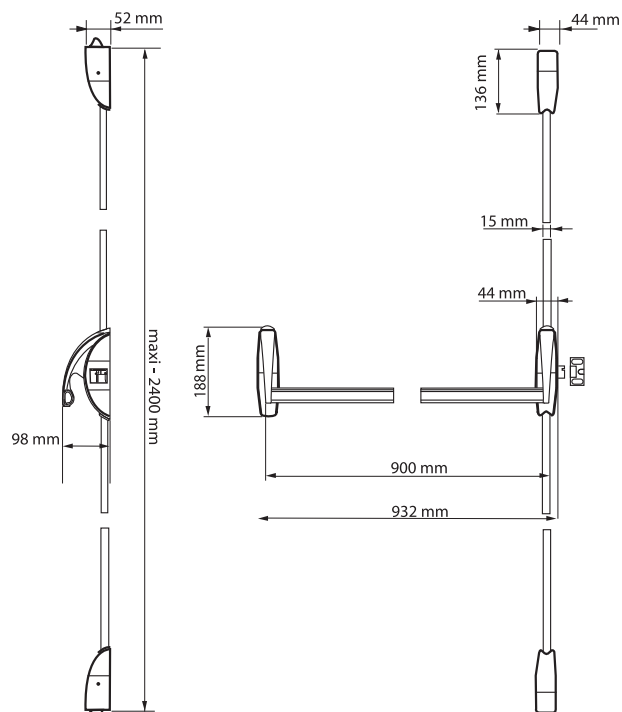


2100 - 1 točka zatvaranja
1 točka zapiranja
1 point of closing

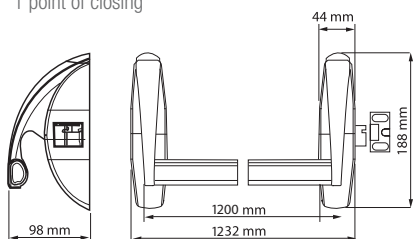


JEDNOKRILNA VRATA ENOKRILNA VRATA
ONE LEAF DOOR

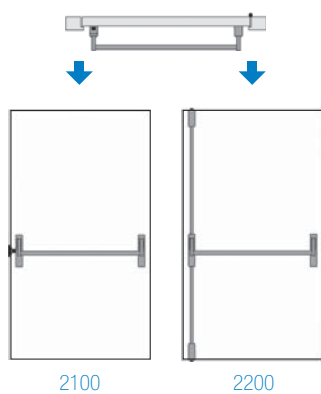

DVOKRILNA VRATA DVOKRILNA VRATA TWO LEAF DOOR
s utorom z profilnim čelnim robom rebated door

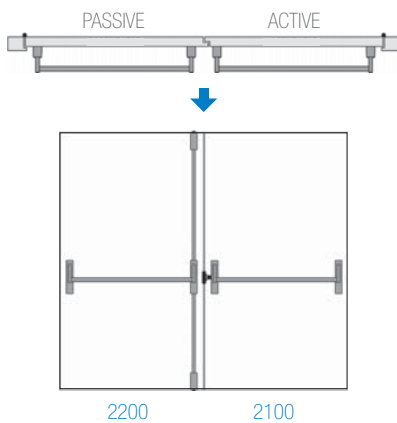




DVOKRILNA VRATA TWO LEAF DOOR
bez utora z ravnim čelnim robom flush door

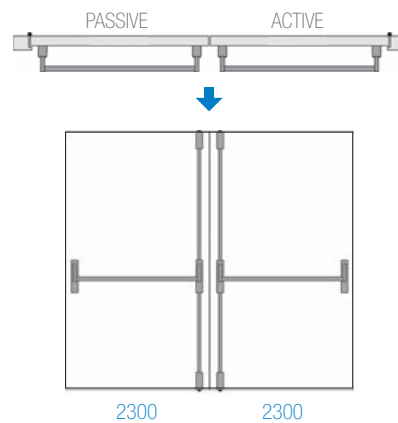



SIGURNOSNE BRAVE
ZA PROTUPROVALNA VRATA
VARNOSTNE KLJUČAVNICE
ZA PROTIVLOMNA VRATA
SECURITY LOCKS
FOR ARMORED DOORS

7056 PEN BLOC

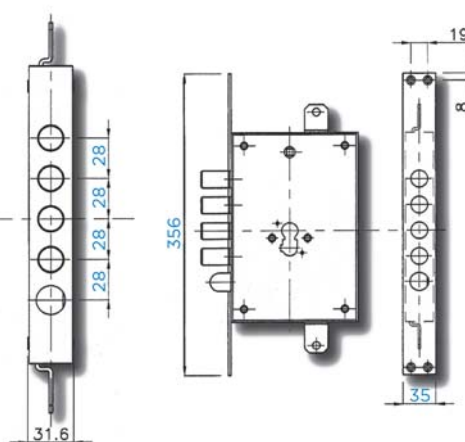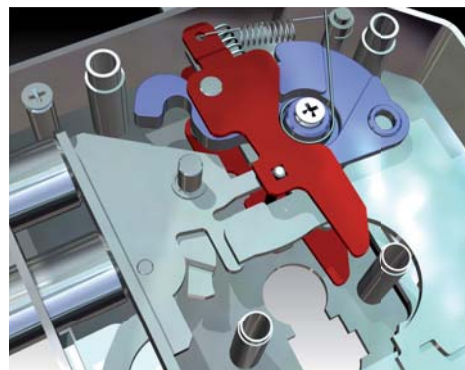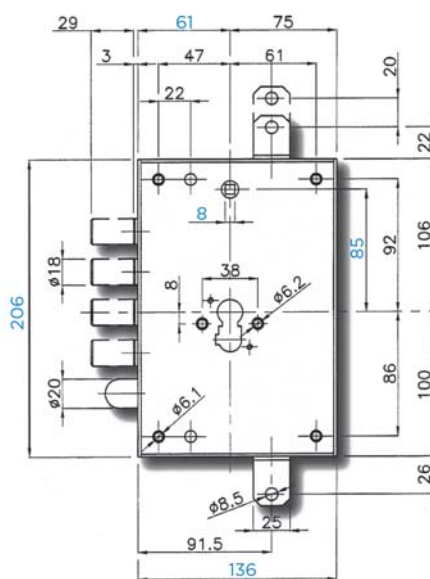

HR

SLO

EN

- FUNKCIJA:

- posebni zaštitni mehanizam s nepovratnom blokadom zasuna u slučaju napada na cilindar
- zaštita od napada na cilindar (izvlačenje, lomljenje...)
- aktivacija: nakon 1 okretanja ključa radi zaključavanja
- deaktivacija: kad je brava otključana cilindar se može zamijeniti
- s podizačem - jezičak se uvlači pritiskom na kvaku i okretanjem ključa (2 okretaja ključa)
- 3 točke zaključavanja
- univerzalno lijevo/desno
- za protuprovalna vrata
- dva okretaja ključa

- TIJELO:

- čelik, galvanizirano
- svi unutarnji dijelovi brave su od čelika
- opcija s čeonom pločom - šifra: 7051 PEN BLOC

- TEHNIČKE INFORMACIJE:

- standard 85 mm
- dubina do sredine cilindra 61 mm

- **PAKIRANJE:** trgovačko - brava s nosačem cilindra i vijkom u kutiji*

- Koristiti samo cilindar s prstenom 9,5 mm EN (DIN)

* sigurnosna rozeta za cilindar se naručuje odvojeno!

- FUNKCJA:

- posebni zaščitni mehanizem omogoča nepovratno blokado zapahov z avtomatsko aktivacijo in deaktivacijo:
- aktivacija blokirnega mehanizma je avtomatska, od prvega obrata ključa in deluje le pri zelo moških napadih, usmerjenih k uničenju cilindra (izvlek, zlom, potiskanje...)
- mehanizem je deaktiviran, ko je ključavnica popolnoma odklenjena, kar omogoča instalacijo ali zamenjavo cilindra
- z vzvodom - vpad se uvleče z kljuko ali ključem
- tri točke zapiranja
- univerzalna, levo - desna
- za protivlomna vrata
- dvojni zaklep

- **OHIŠJE:**

- jeklo, posivizacija
- notranji elementi: jeklo
- opcija s čelnicom - koda: 7051 PEN BLOC

- TEHNIČNE INFORMACIJE:

- standard 85 mm
- razdalja do cilindra 61 mm

- PAKIRANJE: trgovsko - ključavnica z nosilcem

- Uporabiti le cilinder s prstanom 9,5 mm EN (DIN)

* varnostna rozeta za cilinder se naroča posebej!

- FUNCTION:

- special protection device with automatic activation and deactivation of bolts
- protection from attack on cylinder (pulling out, breaking, pushing...)
 - the activation is automatic with first turn of key
 - protection is deactivated when lock is open and it allows than installation or replacing of cylinder
- with lever-the latch is operated on both sides by handle and cylinder key
- triple closure
- universal, left or right
- for armored door
- deadbolt double throw

- HOUSING:

- zinc coated
- Internal components: steel
- option with forend - code: 7051 PEN BLOC

- TECHNICAL INFORMATION:


- standard 72 mm
- distance to cylinder 61 mm

- **PACKAGING:** commercial - lock with cylinder frame and screw in cardbox*

- Use only the cylinder with a cam 9.5 mm EN (DIN)

* cylinder security escutcheon should be ordered separately

7051 MRX

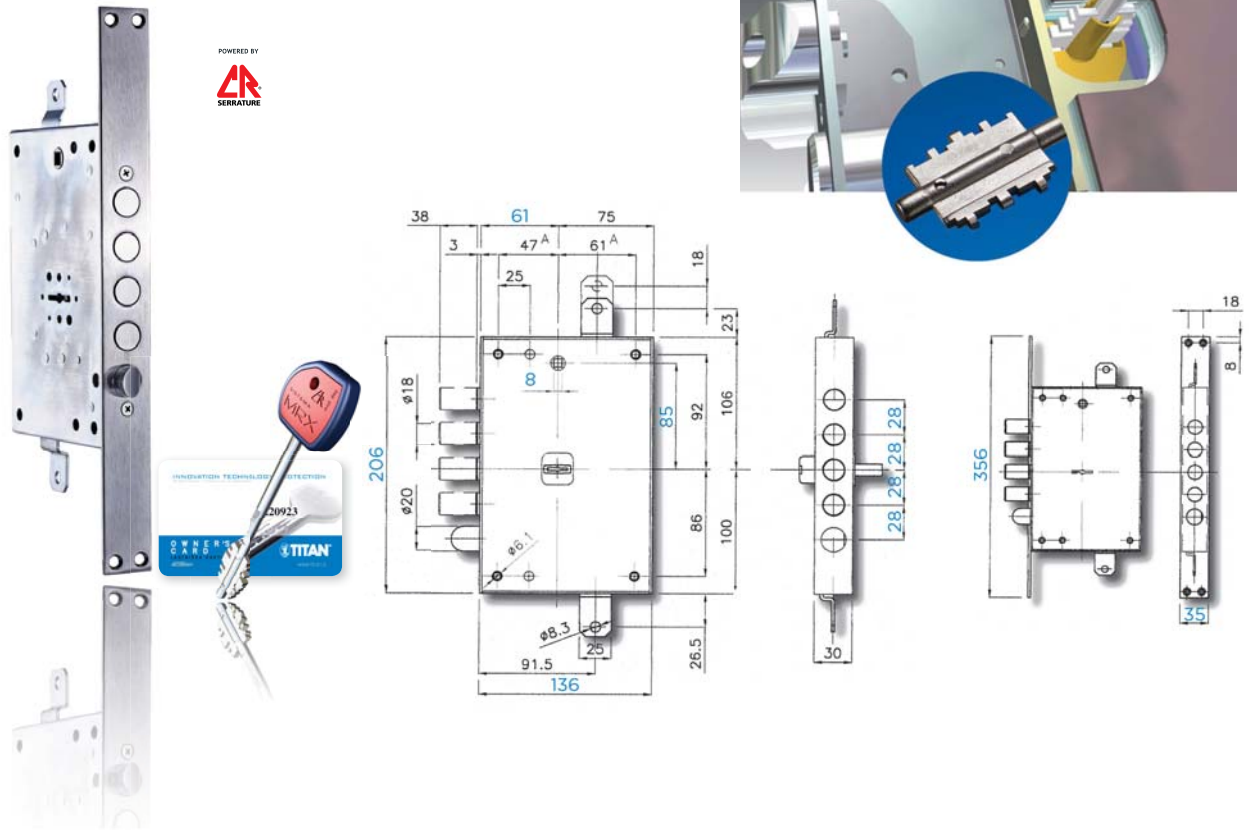

HR

- FUNKCIJA:**
 - patentirani mehanizam zaključavanja: klin, opruga i magnet u ključu
 - s podizačem - jezičak se uvlači pritiskom na kvaku i okretanjem ključa (4 okretaja ključa)
 - 3 točke zaključavanja
 - univerzalno lijevo/desno
 - za protuprovalna vrata
- TIJELO:**
 - čelik, galvanizirano
 - svi unutarnji dijelovi brave su od čelika
 - opcija bez čelnicom - šifra: 7056 MRX
- TEHNIČKE INFORMACIJE:**
 - standard 85 mm
 - dubina do sredine ključa 61 ili 73 mm
- PAKIRANJE:** trgovačko - brava s 3 korisnička ključa + 1 servisni ključ, vlasničkom karticom, rozetama i vijcima u kutiji.

! Ključevi se kopiraju samo u tvornici TITAN ili u ovlaštenom servisu uz predodjenje vlasničke kartice.

SLO

- FUNKCIJA:**
 - patentirani mehanizam zaklepanja z zatičem in magnetom v ključu
 - z vzvodom - vpad se uvleče z kljuko ali ključem (4 zaklepi)
 - 3 točke zapiranja
 - univerzalna, levo - desna
 - za protivlomna vrata
- OHIŠJE:**
 - jeklo, posivizacija
 - notranji elementi: jeklo
 - opcija bez čelnice - koda: 7056 MRX
- TEHNIČNE INFORMACIJE:**
 - standard 85 mm
 - razdalja do ključa 61 ili 73 mm
- PAKIRANJE:** trgovsko - ključavnica s 3 uporabniškimi ključi in 1 tehnični ključ, lastniška kartica, rozete in vijaki v kartonski embalaži.



! Ključji se kopirajo samo v tovarni TITAN ali pri pooblaščenem servisu z lastniško kartico.

EN

- FUNCTION:**
 - patented locking mechanism with ball inside the key
 - with lever-the latch is operated on both sides by handle and cylinder key
 - triple closure
 - universal, left or right
 - for armored door
 - deadbolt 4x throw
- HOUSING:**
 - zinc coated
 - Internal components: steel
 - option without forend - code: 7056 MRX
- TECHICAL INFORMATION:**
 - standard 85 mm
 - distance to key 61 or 73 mm
- PACKAGING:** commercial - lock with 3 user keys and 1 building key, security card, rosette and screws in cardbox

! Additional keys can be made only in TITAN or by authorized service with presenting security card.

7456 RE-CODE

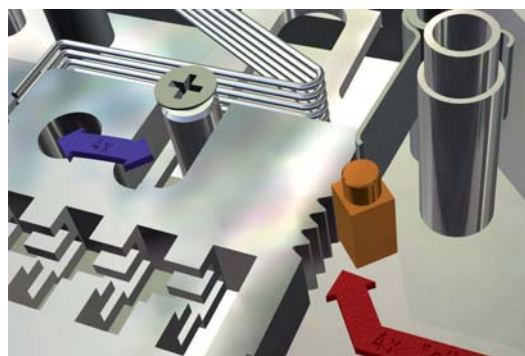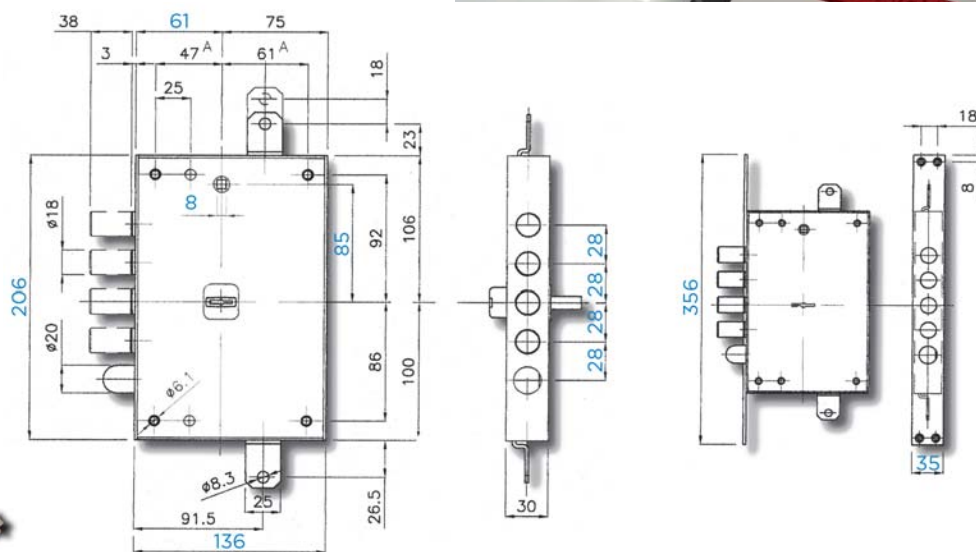

HR


- **FUNKCIJA:**
 - reprogramabilna brava - bez potrebe rastavljanja ili stavljanja novih dijelova; uz bravu dobijete 3 ili 5 korisničkih ključeva + servisni ključ, a kasnije bilo kada se može programirati na novi set ključeva
 - s podizačem - jezičak se uvlači pritiskom na kvaku i okretanjem ključa
 - 3 točke zaključavanja
 - univerzalno lijevo/desno
 - za protuprovalna vrata
 - 4 okretaja ključa
- **TIJELO:**
 - čelik, galvanizirano
 - svi unutarnji dijelovi brave su od čelika
 - opcija s čelnicom - šifra: 7051 RE-CODE
- **TEHNIČKE INFORMACIJE:**
 - standard 85 mm
 - dubina do sredine ključa 61
- **PAKIRANJE:** trgovačko - brava s 3 ili 5 korisničkih ključeva + 1 servisni ključ, rozetama i vijcima u kutiji

SLO


- **FUNKCIJA:**
 - reprogramabilna ključavnica - spremenljiva zaklepna kombinacija brez demontiranja ali zamenjave sestavnih delov; s ključavnico dobite 3 ali 5 uporabniških ključev + servisni ključ, ključavnico je možno kasneje reprogramirati na novi set ključev
 - z vzvodom - vpad se uvleče z kljuko ali ključem
 - tri točke zapiranja
 - univerzalna, levo - desna
 - za protivlomna vrata
 - 4 obrati ključa
- **OHIŠJE:**
 - jeklo, posivizacija
 - notranji elementi: jeklo
 - opcija s čelnicom - koda: 7051 RE-CODE
- **TEHNIČNE INFORMACIJE:**
 - standard 85 mm
 - razdalja do ključa 61
- **PAKIRANJE:** trgovsko - ključavnica s 3 uporabniškimi ključi in 1 tehnični ključ, lastniška kartica, rozete in vijaki v kartonski embalaži.

EN

- **FUNCTION:**
 - resettable locking mechanism without any demounting operation or replacement of parts: with lock choose 3 or 5 user keys and 1 building key, later on client can reset on new set of keys with different key combination
 - with lever-the latch is operated on both sides by handle and cylinder key
 - triple closure
 - universal, left or right
 - for armored door
 - deadbolt 4 throw
- **HOUSING:**
 - zinc coated
 - Internal components: steel
 - Option with forend - code: 7051 RE-CODE
- **TECHICAL INFORMATION:**
 - standard 85 mm
 - distance to key 61
- **PACKAGING:** commercial - lock with 3 or 5 user keys and 1 building key, rosette and screws in cardbox

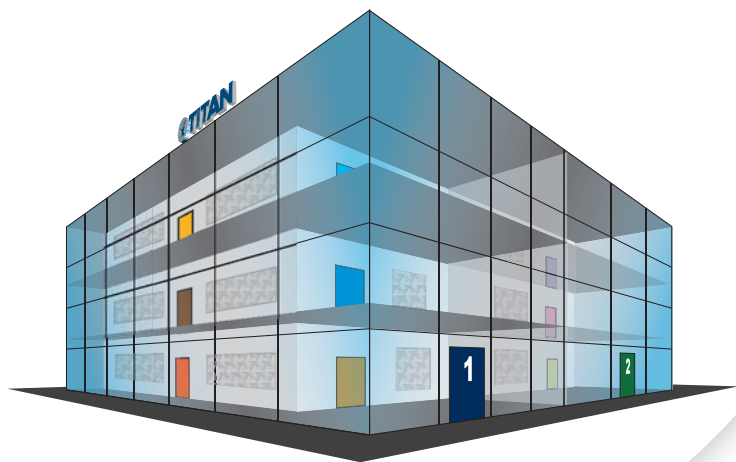

SISTEMI ZAKLJUČAVANJA
ZAKLEPNI SISTEMI
MASTER LOCKING SYSTEMS

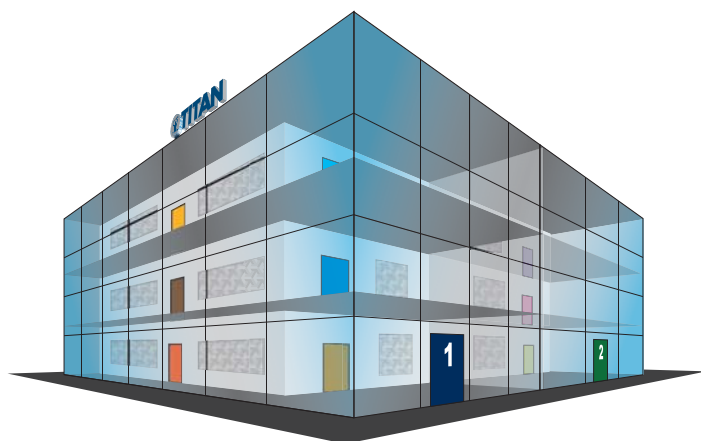

	ZGRADA ZGRADBA BUILDING 1						ZGRADA ZGRADBA BUILDING 2			
GENERALNI / GRAND MASTER K										
GLAVNI / MASTER K 1										
K 1.1										
K 1.2										
K 1.3										
K 1.4										
K 1.5										
K 1.6										
GLAVNI / MASTER K 2										
K 2.1										
K 2.2										
K 2.3										

HR

SLO

EN

Što su sistemi zaključavanja?

Sistem zaključavanja pojednostavljeno znači određivanje (programiranje) svakog ključa za otvaranje jednih ili više vrata. Kod naprednih i složenih sistema zaključavanja jedan ključ može otvoriti sva vrata i njega nazivamo glavni ili generalni ključ dok ostali korisnici otvaraju samo pojedina vrata prema dodjeljenim ovlastima.

Čemu služe sistemi zaključavanja?

ZA PRIVATNE OBJEKTE, KUĆE I STANOVE:

Za jednostavniju upotrebu ključa mogu se vrata, ormarići, šupe, garaža itd. otključavati samo jednim ključem.

Ako postoji više nekretnina (stan, kuća, vikendica...) vlasnik će imati jedan ključ (glavni) koji otvara sve objekte, a ostali korisnici (podstanari, zaposlenici...) otvaraju samo one ulaze i objekte koje vlasnik odredi prilikom izrade sistema.

ZA STAMBENE ZGRADE:

Za stanare stambene zgrade Titan omogućuje da glavni ulaz, spremište, podrum i druge zajedničke prostore otvaraju svojim ključem od stana. To, također, mogu i svi drugi stanari.

Susjedi ne mogu međusobno otvarati stanove!

Kaj so zaklepni sistemi?

Zaklepni sistem poenostavljeno pomeni dodeljevanje moznosti, da en ključ odpira ena vrata ali već vrat. Izvedba zaklepnega sistema je lahko različna in se prilagodi organizaciji dostopa do prostorov.

Komu so namenjeni zaklepni sistemi?

ZA PRIVATNE OBJEKTE, HIŠE IN STAOVANJA:

Možno je z uporabo enega ključa odklepati vrata, omarice, shrambe, garaže...

V primeru več zgradb (hiša, vikend...) je možno izdelati zaklepni sistem, ki omogoča lastniku odpirati vse objekte z glavnim ključem, ostalim (zaposleni, najemniki, ...) pa samo tista vrata, ki jih dodeli lastnik sistema.

ZA VEČSTANOVANJSKE ZGRADBE:

Zaklepni sistem omogoča stanovalcem, da s ključem stanovanja odpirajo tudi vse skupne prostore (glavni vhod, sušilnico, garažo...).

Medsebojno se stanovanja ne morejo odklepati!

What Does Master Locking System Stand for?

In simple terms, a locking system stands for programming every key to open one or more doors. In advanced and complex master locking systems, one key, called a master key, can open all the doors, while other users are able to open only some doors, depending on their authorities.

The Purpose of Locking Systems

FOR PRIVATE BUILDINGS, HOUSES AND APARTMENTS:

To simplify the use of a key, it is possible to open doors, lockers, sheds, garages etc. with only one key.

If there is more than one real estate (apartment, house, weekend cottage...), the owner will have only one (master) key that opens all the buildings, while other users (subtenants, employees...) will be able to open only those entrances and buildings which the owner defines during production of the system.

FOR APARTMENT BUILDINGS:

Titan makes possible for the tenants of an apartment building to open the main entrance, storeroom, basement and other common areas with the key to their apartment. All other tenants can do the same. Note: neighbours cannot open each other's apartments!

HR

ZA POSLOVNE OBJEKTE I KOMPLEKSNE ORGANIZACIJE:

Za poduzeća, obrte ili proizvodne hale, na jednoj ili više lokacija sistem zaključavanja omogućuje kontrolu nad svim objektima upotrebom samo jednog ključa.

ZA HOTELE, HOSTELE ILI APARTMANE:

Za hotele ili apartmane nad kojim vlasnik želi imati kontrolu pristupa i kopiranja ključeva sistem zaključavanja s patentiranim profilom omogućuje da svaki gost ima ključ koji otvara samo njegovu sobu, a koji ne može kopirati, dok istovremeno vlasnik ima generalni ključ koji otvara sve sobe i sva vrata.

Sigurnost

Titan i DOM posjeduju patentirane profile ključeva koji osiguravaju zaštitu od novlaštenog kopiranja. Uz visoku razinu sigurnosnog cilindra dobiva se više sigurnosti i za sistem zaključavanja.

SLO

ZA POSLOVNE OBJEKTE IN KOMPLEKSNE ORGANIZACIJE:

Za podjetja, proizvodne prostore, na eni ali več lokacijah. Zaklepni sistem omogoča kontrolo nad vsemi objekti z uporabo samo enega ključa.

ZA HOTELE, HOSTLE ALI APARTMAJE:

Za hotele ali apartmaje za katere lastnik želi imeti kontolo pristopa in kontolo nad ključi je na voljo patentirani sistem. Vsak gost ima ključ sobe, ki ga ne more kopirati, lastnik pa ima generalni ključ, ki omogoča odpiranje vseh vrat.

Varnost

Titan in DOM imata patentirane profile, ki onemogočajo nepooblaščenno kopiranje. Z cilindri visoke varnosti so tako zaklepni sistemi še varnejši.

EN

FOR COMMERCIAL BUILDINGS AND COMPLEX ORGANISATIONS:

When it comes to companies, crafts or manufacturing halls, the locking system makes it possible to control all object using only one key.

FOR HOTELS, HOSTELS OR APARTMENTS:

When it comes to hotels and apartments, where the owner wants to control the access and prevent key copying, the master locking system with a patented profile makes it possible for every guest to have a uncopyable key that opens only their room, while the owner has the master key that opens all the rooms and all the doors.

Safety

Titan and DOM offer patented key profiles that enable protection against unauthorised copying. With a high level of security cylinder, the locking system shall become safer.

**Udobnost****IZRADA NOVIH KLJUČEVA I CILINDARA**

Uz sistem zaključavanja se isporučuje plan zaključavanja i servisna kartica. Bilo kakve promjene, dodatni ključevi ili cilindri se naručuju uz predočenje servisne kartice kod tvornice Titan ili ovlaštenog servisa.

Kontrola pristupa

na str. 132

Udobnost**IZDELAVA NOVIH KLJUČEV IN CILINDROV**

Z zaklepnim sistemom se dobavi tudi zaklepni načrt in servisna kartica. Kakršnekoli spremembe se naročajo s pomočjo servisne kartice v tovarni Titan ali pri pooblaščenem serviserju.

Kontrola pristopa

na str. 132

Comfort**MAKING NEW KEYS AND CYLINDERS**

With the master locking system we deliver a locking plan and a service card. Any changes, additional keys or cylinders can be ordered by submitting the service card to Titan factory or to authorised partner service.

Access Control

page 132

Kontrola pristupa | Kontrola pristopa | Access Control

HR

U planu zaključavanja vlasnik i/ili direktor određuju ovlasti otvaranja pojedinih korisnika.

Kroz više sigurnosti, udobnosti i kontrole pristupa vlasnici objekta dobivaju veću kontrolu nad izradom ključeva, a naprednim sistemom zaključavanja ostvaruju i dodatnu vrijednost svoje nekretnine.

SKUPA S VAMA ĆEMO:

1. napraviti popis svih prostora i osoba koji koriste ključeve
2. odrediti koje osobe smiju ulaziti u pojedine prostore (razina ovlaštenja)
3. izabrati cilindre za koje je potrebno odrediti točnu dimenziju, izvedbu i funkciju

SLO

V zaklepnom sistemu lastnik ali direktor odredjajo pooblastila dostopa posameznih uporabnikov.

Zaradi večje varnosti, udobnost in zaradi večjega nadzora nad prihodi, lastniki objektov nadzirajo razmnoževanje ključev in s tem skozi napredne zaklepne sisteme ustvarjajo dodano vrednost svojemu premoženju.

SKUPAJ Z VAMI BOMO:

1. napravili popis vseh prostorov in oseb, ki bodo koristili ključe
2. odredili pooblastila oseb za dostope v posamezne prostore
3. izbrali cilindre; funkcijo in dimenzijo

EN

In a locking plan the owner and/or director gives authorisations regarding the access to a single user.

With more safety, comfort and access control, the building owners have more control over key copying, while advanced locking system increases the value of their real estate.

TOGETHER WE WILL DO THE FOLLOWING:

1. make a list of all the areas and all the people that use the keys
2. define which person should be allowed to enter specific areas (authorisation level)
3. select cylinders for which it is necessary to define exact dimensions, performance and function



NOVO!

Sklopka za štednju struje!

Korisnik svojim ključem kod ulaska u objekt ili prostor uključuje potrebno osvijetljenje, a kod izlaska se isključuje sve nepotrebne potrošače struje i rasvjeta.

Svaki pojedinačni slučaj se prilagođava željama korisnika.

NOVO!

Stikalo za varčevanje električne energije!

Uporabnik pri vstopu vključi elektriko (razsvetljavo, porabnike,...), a pri odhodu izključi porabnike in razsvetljavo.

Izvedbe se prilagodijo potrebam uporabnikov.

NEW!

Energy saving switch!

When entering the building or specific areas, by turning their key, the users switch on the necessary lighting, and when they leave, all unnecessary energy consuming appliances and lighting are switched off.

We are flexible to the needs of our customers in each particular case.

DEMO - 11.00.111			Oznaka na cilindru Oznaka na cilindru Cylinder mark		1-1	1-2	1-3	1-4	1	2-1	2-2	2-3	2-4	2	
			Dužina cilindra u mm Dolžina cilindra v mm Cylinder length in mm	A	35	35	35	35	35	35	35	35	35	35	35
				B	30	30	30	30	30	30	30	30	30	30	30
			Kom Kos Pcs		1	1	1	1	1	1	1	1	1	1	1
TITAN®				IME PROSTORIJE IME PROSTORA SPACE NAME	URED 1 PISARNA 1 OFFICE 1	URED 2 PISARNA 2 OFFICE 2	URED 3 PISARNA 3 OFFICE 3	URED 4 PISARNA 4 OFFICE 4	ULAZ 100 VHOD 100 ENTRANCE 100	URED 5 PISARNA 5 OFFICE 5	URED 6 PISARNA 6 OFFICE 6	URED 7 PISARNA 7 OFFICE 7	URED 8 PISARNA 8 OFFICE 8	ULAZ 200 VHOD 200 ENTRANCE 200	
OZNAKA NA KLJUČU OZNAKA NA KLJUČU KEY MARK	Kom Kos Pcs	Korisnik ključa Uporabnik ključa Key user		1	2	3	4	5	6	7	8	9	10		
1 - 1	3		1	✕				✕							
1 - 2	6		2		✕			✕							
1 - 3	3		3			✕		✕							
1 - 4	6		4				✕	✕							
GL 1	2	DIREKTOR 1. ODJELA HEAD OF 1st DEP.	5	✕	✕	✕	✕	✕							
2 - 1	6		6						✕				✕		
2 - 2	5		7							✕			✕		
2 - 3	3		8								✕		✕		
2 - 4	4		9									✕	✕		
GL 2	3	DIREKTOR 2. ODJELA HEAD OF 2nd DEP.	10						✕	✕	✕	✕	✕		
GEN	1	GENERALNI DIREKTOR CEO		✕	✕	✕	✕	✕	✕	✕	✕	✕	✕		

HR

SLO

EN

PLAN ZAKLJUČAVANJA

Plan zaključavanja Vašeg objekta je pohranjen u TITANU te predstavlja poslovnu tajnu, a korisnik po potrebi može dobiti kopiju ključa i/ili cilindra iz postojećeg sistema zaključavanja. Moguće je, također, postojeći sistem zaključavanja mijenjati ili proširiti.

U plan zaključavanja je poželjno planirati kasnija moguća proširenja radi jednostavnijeg servisa. Prema planu zaključavanja se vidi da pojedini ključevi (svaki sa svojom oznakom) otvaraju samo pojedine cilindre (svaki sa svojom oznakom) i to je u planu označeno s križićem.

ZAKLEPNI NAČRT

Načrt zaklepanja je shranjen v arhivu tovarne Titan. Zaklepni načrt predstavlja poslovnu tajnost in ga lahko dobi samo lastnik. Kopijo ključa ali cilindra lahko dobi uporabnik ob predložitvi servisne kartice in osebne dokumenta.

V zaklepnom načrtu je zaželeno planirati možne razširitve zaradi enostavnejšega servisiranja sistema. V zakleponem načrtu so prikazani in označeni s križcem posamezni ključji in katera vrata ti ključji odlepajo.

LOCKING PLAN

The locking plan of your building is saved in TITAN and may be considered a trade secret. If required, it is possible for the user to get a copy of a key and/or cylinder from the existing master locking system. It is also possible to modify or extend the existing master locking system.

We recommend that you take into consideration all possible further extensions when planning the master locking system, to simplify maintenance. It is visible in the locking plan that specific keys (each one marked separately) open only specific cylinders (each one marked separately), which is marked with a cross.

HR

SLO

EN

Sistem istog ključa

Namjenjen je manjim objektima gdje pristup prostorijama nije ograničen na određene osobe. Primjerice, glavni ulaz, drvarnica, šupa, garaža, vikendica i ured se otvaraju istim ključem.

Sistem istega ključa

Namenjen je objektom, kjer pristop ni omejen na posamezne osebe. Vse osebe lahko uporabljajo vse prostore.

Keyed Alike

Designed for small buildings with no access restrictions. For example, the main entrance, coal-cellar, shed, garage, weekend cottage and office are opened using only one key.



HR

SLO

EN

Sistem glavnog ključa

Omogućuje da više prostora zaključanih cilindrima, koji se međusobno ne mogu otvarati, otvara poseban ključ kojeg zovemo GLAVNI KLJUČ.

Odlično rješenje za privatne objekte, kuće, uredske prostore te za male i srednje tvrtke.

Sistem glavnega ključa


Mogoče je več prostorov zakleniti z cilindri, ki ne morejo medsebojno odklepanje. Vse cilindre pa je možno odpreti z enim ključem - GLAVNI KLJUČ.

Odlična rešitev za majhna in srednja podjetja.

Master Key System

Makes possible to unlock more areas locked by cylinders that cannot be open by each other's key, by a special key called the MASTER KEY.

Excellent solution for private buildings, houses, offices or small and medium-sized enterprises.

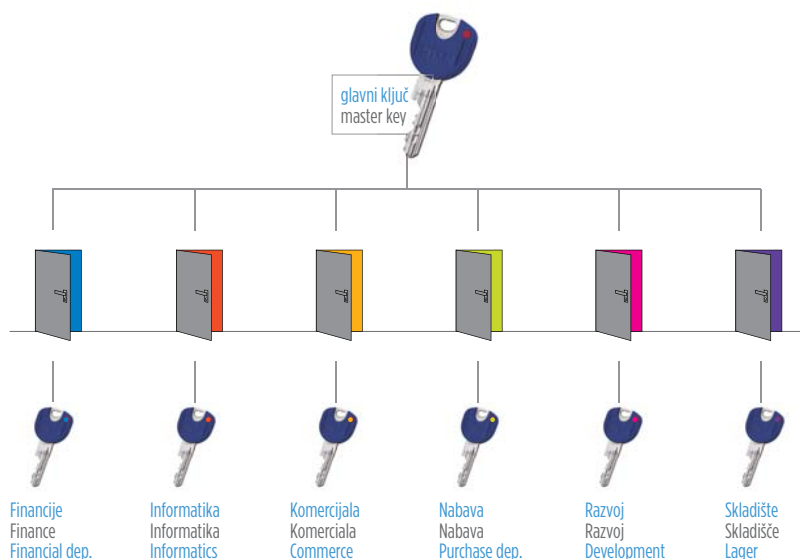

HR

SLO

EN

Sistem centralnog cilindra

Namjenjen za stambene i poslovne zgrade sa zajedničkim prostorima i prolazima. Zajedničke prostore utvrdene planom zaključavanja korisnik otvara/zatvara s ključem SVOG STANA ili RADNOG MJESTA (UREDA), ali međusobno otvaranje nije moguće.

Primjerice, stanar može svojim ključem otvarati svoj ured, stan, poštanski sandučić, ostavu ili šupu i vlastitu garažu, ali i zajedničke prostore kao što su glavni ulaz, biciklarnik, smetlarnik, zajednički ulaz u garažni prostor i podrum, praonica i sušionica rublja.

Otvaranje/zatvaranje izvan plana zaključavanja je u potpunosti isključeno.

Sistem centralnega cilindra

Namenjen je večstanovnijskim zgradbam in poslovnim zgradbam s skupnimi prostori in prehodi. Skupne prostore in skupne prehode uporabnik odklepa s ključem SVOJEGA STANOVANJA ALI PISARNE, vendar medsebojno odklepanje ni mogoče.


Primer: stanovalec lahko odklepa s svojim ključem vhod, poštni nabiralnik, shrambo, stanovanje, garažo, sušilnico perila, ...

Central Cylinder System

Designed for apartment and business buildings with common areas and passages. Users can lock/unlock the common areas defined in the locking plan by the key to their APARTMENT or OFFICE, but one area cannot be opened by the key of the other one.

For example, a tenant can open their office, apartment, mailbox, shed and garage by their own key, as well as the common areas such as the main entrance, bike storeroom, garbage room, entrance to the garage and cellar or laundry-room.

Locking/unlocking outside the locking plan is completely impossible.

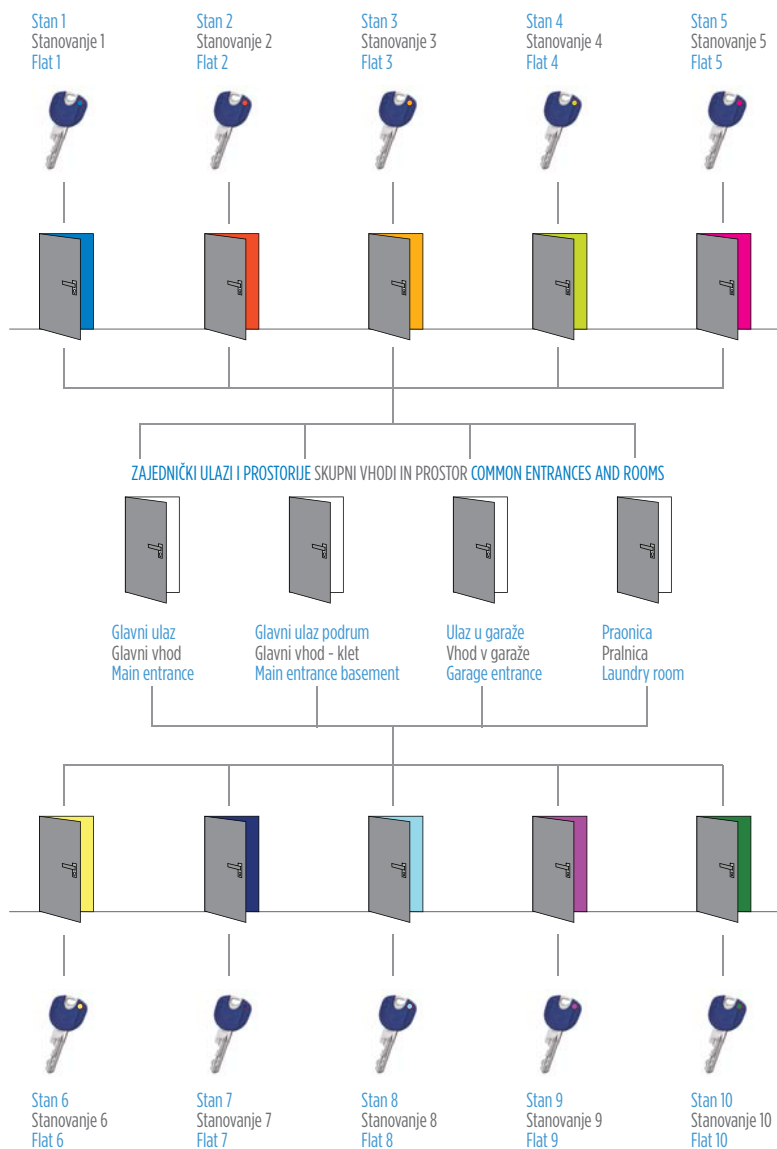

HR

SLO

EN

Sistem centralnog cilindra s tehničkim glavnim ključem

Za tvrtke koje se bave održavanjem objekata (Facility Management) može se povezati nekoliko objekata na način da svojim tehničkim glavnim ključem otvaraju sve glavne ulaze te komunalne i tehničke prostore (primjerice strojarnica, ventilacija...) u koje korisnici ključeva nižeg ranga nemaju ovlaštenje ući.

Sistem centralnega cilindra s tehničkim glavnim ključem

Za firme, ki vzdržujejo po več objektov, je možno izdelati sistem, ki omogoča odpiranje glavnih vhodov in tehnične prostore (ogrevanje, ventilacijo,...). Ostali uporabniki nimajo pooblastil za odpiranje teh prostorov.

Central Cylinder System with a Technical Master Key

When it comes to facilities management companies, more buildings can be connected in a way that one technical master key can open all main entrances or utility and technical areas (e.g. engine room, ventilation system...), which the low-ranking key users are not allowed to enter.



HR

SLO

EN

Višestupnjevani sistem zaključavanja


Namjenjen za male organizacije, od privatnih objekata do malih tvrtki i organizacija. Svakom korisniku se dodjeljuje pristup onim prostorijama za koje je interesno vezan (primjerice vlastiti ured, zajedničke prostorije), a vlasniku ili direktoru se dodjeljuje pristup svim prostorijama.

Večstopenjski sistem zaklepanja

Namenjen je majhim podjetjem, privatnim Objektom in ostalim. Vsakemu uporabniku se dodeli dostop do prostorov, ki so vezani za uporabnikovo dejavnost (pisarna, skupni prostori, vhod,...). Lastniku ali direktorju pa se dodeli dostop do vseh prostorov.

Small Grand Master Key System

Designed for small organisations, from private buildings to small enterprises and organisations. Each user may access the areas that serve their interests (e.g. their office, common areas), while the owner or director may access all the areas.

OSOBLE ZA ODRŽAVANJE OSEBE ZA VZDRŽAVANJE MAINTENANCE STAFF	ZAPOSLENCI U MARKETINGU ZAPOSLENCI V MARKETINGU EMPLOYEES IN MARKETING	ZAPOSLENCI U FINACIJAMA ZAPOSLENCI V FINACIAH EMPLOYEES IN FINANCES	ZAPOSLENCI PRODAJE ZAPOSLENCI PRODAJE EMPLOYEES IN SALES	SKLADŠTARI SKLADIŠČNIKI STOREKEEPERS	DIREKTOR DIREKTOR CEO	
						
					✓	Direktorov ured Direktorjeva pisarna CEO's office
✓				✓	✓	Skladište Skladišče Warehouse
✓		✓	✓		✓	Odjel prodaja Prodaja Sales department
✓		✓			✓	Odjel financija Finance Finances department
✓	✓				✓	Odjel marketinga Marketing Marketing department
✓	✓	✓	✓	✓	✓	Glavni ulaz Glavni vhod Main entrance

HR

SLO

EN

Sistem generalnog ključa

Sistem se preporučuje za velike objekte koji su podijeljeni na više manjih jedinica ili odjela (Odjel A, B, C...). Više osoba koristi glavne ključeve (primjerice voditelji odjela) s kojima otvaraju/zatvaraju samo glavni ulaz u zgradu te ulaz u odjel i sve urede u tom odjelu, ali pojedinac ima pristup u odjel te samo u određene prostor unutar odjela (primjerice djelatnik pristupa u svoj ured – ključ 1, 2, 3, 4...). Sistem je sastavljen iz više sistema glavnog ključa, a povezuje ih GENERALNI KLJUČ, kojim ovlaštena osoba (primjerice generalni direktor tvrtke) otvara/zatvara sve prostore. Sistem generalnog ključa može se na zahtjev klijenta dopuniti s dodavanjem grupa, koje otvara grupni ključ (primjerice u slučaju oformljavanja novog odjela).

Sistem generalnog ključa se sastoji od niza grupa različitih razina ovlasti gdje grupe mogu imati i podgrupe, koje se mogu i križati, ali generani ključ je taj koji otvara sva vrata.

Rješenje za objekte bilo koje namjene te za srednje tvrtke s rastućom i promjenjivom organizacijom. TITAN i DOM imaju mogućnost isporučiti sistem za ključavanje za više od 50.000 individualnih korisnika tog sistema.

Sistem generalnega ključa

Sistem se priporoča za velike objekte, ki so razdeljeni na manjše enote ali oddelke. Več oseb uporablja glavne ključke (vodje oddelkov) s katerimi odpirajo glavne vhode in oddelke, posamezniki pa imajo dostop do oddelka in do določenih prostorov znotraj oddelka.

Zaklepni sistem je sestavljen iz več glavnih ključev, ki jih povezuje generalni ključ, ki omogoča pooblaščenim osebi odklepanje in zaklepanje vseh prostorov.


Sistem je namenjen podjetjem, ki imajo spremenljivo organizacijo. TITAN in DOM imata možnost dobaviti zaporni sistem za več kot 50.000 posameznih uporabnikov

Grand Master Key System

The system is recommended for large buildings divided into smaller units or sections (Department A, B, C...). Several people use master keys (e.g. department managers) to lock/unlock only the main entrance of a building and entrance of a department and all offices inside that department, but a single person may access only the department and specific areas inside the department (e.g. an employee accessing their office - key 1, 2, 3, 4...). The system is composed of several master key systems interconnected by a GENERAL MASTER KEY, used by an authorised person (e.g. managing director of a company) to lock/unlock all the areas. On customer's request, the General Master Key System can be extended by adding groups, which are opened using a group key (e.g. when forming a new section).

The General Master Key System is composed of a number of groups with different authorisation levels, those groups can also have subgroups that may intersect, but only a general master key can open all the doors.

A solution for buildings of any purpose and for medium-sized enterprises with growing and reconfigurable organisation. TITAN and DOM are able to deliver the locking systems to more than 50.000 individual users.

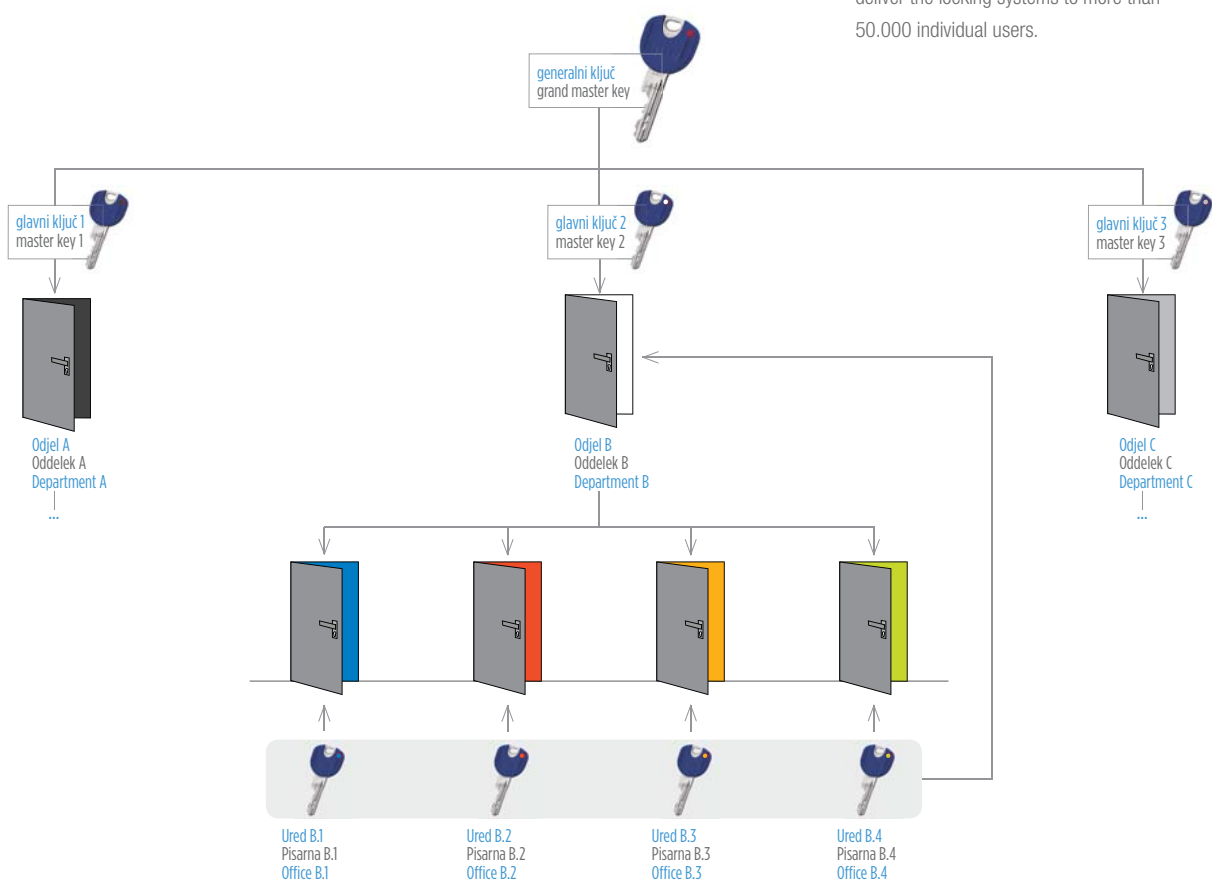

Izvedbe i funkcije | Izvedbe in funkcije | Types and Functions



HR

SLO

EN

Izvedbe koje možemo upotrijebiti u sistemima zaključavanja:

1. cilindar
2. polucilindar
3. cilindar s produžetkom za gumb
4. cilindar s gumbom
5. lokot
6. bravica za ormariće
7. cilindar za dodatnu sigurnosnu bravu
8. cilindar za poprečnu sigurnosnu bravu
9. sklopka za struju (štedna sklopka, eng. energy saver) – NOVO!

Izvedbe ki jih je možno uporabiti v sistemih zaklepanja:

1. cilindar
2. polcilindar
3. cilindar s podaljškom za gumb
4. cilindar z gumbom
5. obešanka
6. ključavnica za omarice
7. cilindar za dodatno varnostno ključavnico
8. cilindar za prečno varnostno zaporo
9. stikalo za električni tok (varčevalno stikalo, eng. energy saver) – NOVO!

Types usable for master locking systems:

1. cylinder
2. half-cylinder
3. cylinder with special extension for knob
4. knob cylinder
5. padlock
6. cam lock
7. cylinder for security-additional rim lock
8. cylinder for security cross bar door lock
9. energy saver switch - NEW!



HR

SLO

EN

Funkcije koje možemo koristiti u sistemu zaključavanja:

- standardna sklopka
- sklopka s obostranim otključavanjem
- modular - protulomnost + fleksibilnost dimenzije
- AMOK ili slobodan hod gumba - za institucije zdravstva i školstva
- slobodan hod prstena - za antipanic brave

Funkcije ki so možne v zaklepnih sistemih:

- standardna sklopka
- sklopka z obojestranskim odklepanjem
- modular - protulomnost + fleksibilnost dimenzije
- AMOK ali prosti hod gumba - za potrebe zdravstva in šolstva
- prosti hod prstana - za antipanic ključavnice

Cylinder functions usable in master locking system:

- standard coupling
- lockable from both sides
- modularity - break resistant and dimension flexibility
- anti-AMOK - free turn of knob - for health and education institutions
- free turn of cam - for Anti-Panic Locks

Cilindri za sisteme zaključavanja | Cilindri za zaklepne sisteme | Master Locking System Cylinders

HR

- **DOM ix Saturn** – mogućnost ugradnje plastične kapice s čipom za kontrolu pristupa DOM
- **TITAN T250**
- **DOM ix 6 SR** – mogućnost ugradnje plastične kapice s čipom za kontrolu pristupa DOM
- **DOM ix Gamma** – mogućnost ugradnje plastične kapice s čipom za kontrolu pristupa DOM
- **TITAN T200**
- **DOM ix DAS** – mogućnost ugradnje plastične kapice s čipom za kontrolu pristupa DOM
- **TITAN T100RX**
- **TITAN K66**
- **TITAN TL**
- **DOM Sigma Plus** – mogućnost ugradnje plastične kapice s čipom za kontrolu pristupa DOM
- **TITAN K56**
- **TITAN K55**
- **TITAN K5**
- **TITAN W**
- **TITAN B**

! DOM diamant se može naručiti samo u opciji sistema na isti ključ!

SLO

- **DOM ix Saturn** – možnost montaže plastične glave ključa s čipom za kontrolu dostopa DOM
- **TITAN T250**
- **DOM ix 6 SR** – možnost montaže plastične glave ključa s čipom za kontrolu dostopa DOM
- **DOM ix Gamma** – možnost montaže plastične glave ključa s čipom za kontrolu dostopa DOM
- **TITAN T200**
- **DOM ix DAS** – možnost montaže plastične glave ključa s čipom za kontrolu dostopa DOM
- **TITAN T100RX**
- **TITAN K66**
- **TITAN TL**
- **DOM Sigma Plus** – možnost montaže plastične glave ključa s čipom za kontrolu dostopa DOM
- **TITAN K56**
- **TITAN K55**
- **TITAN K5**
- **TITAN W**
- **TITAN B**


! DOM diamant se lahko naroči samo v sistemu enotnega ključa!

EN

- **DOM ix Saturn** – option of upgrade with plastic cap with transponder for DOM Access Control
- **TITAN T250**
- **DOM ix 6 SR** – option of upgrade with plastic cap with transponder for DOM Access Control
- **DOM ix Gamma** – option of upgrade with plastic cap with transponder for DOM Access Control
- **TITAN T200**
- **DOM ix DAS** – option of upgrade with plastic cap with transponder for DOM Access Control
- **TITAN T100RX**
- **TITAN K66**
- **TITAN TL**
- **DOM Sigma Plus** – option of upgrade with plastic cap with transponder for DOM Access Control
- **TITAN K56**
- **TITAN K55**
- **TITAN K5**
- **TITAN W**
- **TITAN B**

! DOM diamant could be ordered only in keyed alike system!

Integracija sistema zaključavanja i kontrole pristupa | Integracija zaklepnega sistema in kontrole dostopa | Master Locking Systems and Access Control Integration

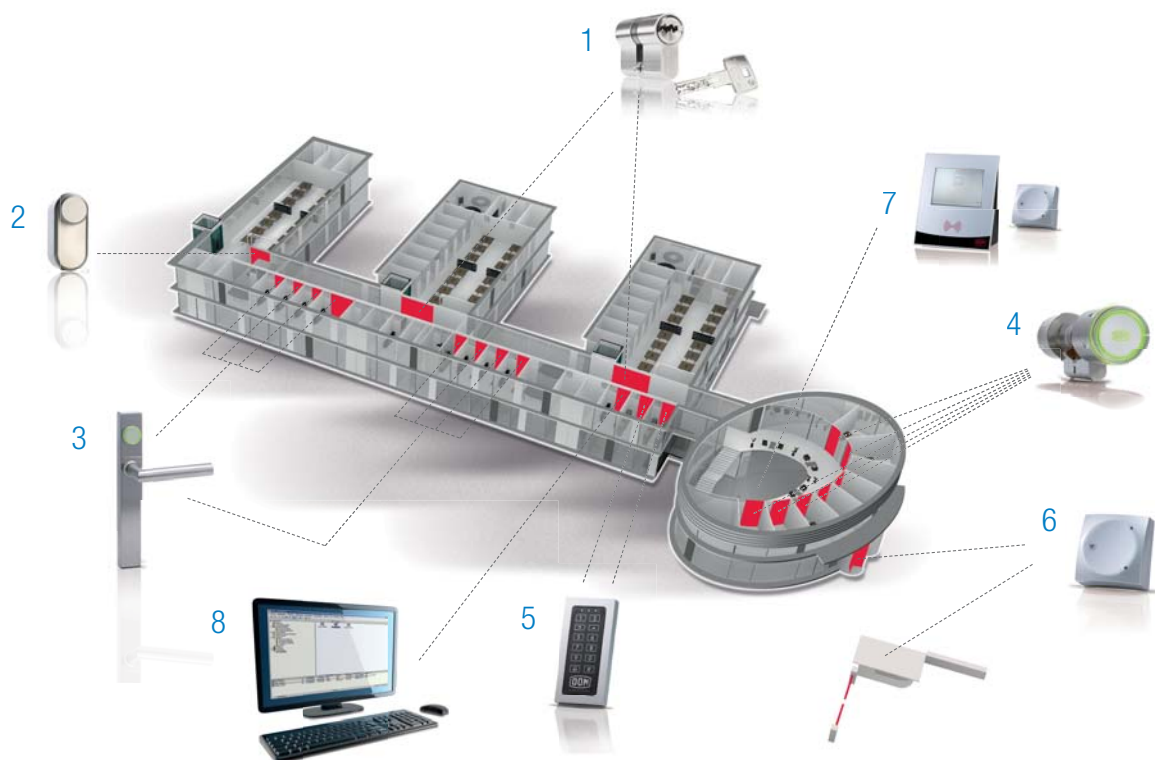

HR

Primjer mehaničkog i elektroničkog sistema zaključavanja i kontrole pristupa:

1. DOM mehanički sistem - služba za održavanje ima sve tehničke prostore (kotlovnica, ventilaciju i sl.) u sistemu centralnog cilindra na glavni ključ
2. DOM motorizirani cilindar - očitavanjem kartice/privjeska na zidnom čitaču motorizirani cilindar otključava poslovnu arhivu
3. DOM Guardian - uredi zaposlenika
4. DOM ENIQ - konferencijske sale i izložbeni saloni sa staklenim vratima
5. DOM Protector + DOM Keypad - server soba
6. DOM AccessManager zidni čitač - automatska staklena vrata na glavnom ulazu, uz rampu na parkiralištu
7. DOM Terminal - glavni ulaz i/ili recepcija
8. DOM Software i elektronski ključevi se nalaze kod administratora koji određuje ovlasti otvaranja prema organizacijskog shemi.

SLO

Primer mehanskoga in elektronskega zaklepnega sistema in kontrole dostopa:

1. DOM mehanski sistem - služba za vzdrževanje - vsi tehnični prostori (kotlovnica, ventilacija, ...) - sistem centralnega cilindra na glavni ključ.
2. DOM motorizirani cilindar - s pomočjo kartice / obeska cilindar odpira poslovni arhiv
3. DOM Guardian - pisarne zaposlenih
4. DOM ENIQ - konferenčna dvorana in razstaveni prostor
5. DOM Protector + DOM Keypad - server soba
6. DOM AccessManager zidni čitalnik - avtomatska staklena vrata na glavnem vhodu, zraven rampe na parkirnem prostoru
7. DOM Terminal - glavni vhod - recepcija
8. DOM Software in elektronski ključki se nahajajo pri administratorju, ki dodeljuje pooblastila odpiranja glede na organizacijsko shemo.

EN

Example of mechanic and electronic locking system and access control:

1. DOM mechanic locking system - department of facility management have all technical areas (engine room, ventilation system etc.) in central cylinder system with a technical master key
2. DOM motorised cylinder - when card reader reads card motorised cylinder gets impulse and unlocks business archive
3. DOM Guardian - employees offices
4. DOM ENIQ - conference room and show rooms with glass doors
5. DOM ENIQ + DOM Keypad - server room
6. DOM AccessManager wall reader - automatic slide doors on main entrance, on side with parking barrier
7. DOM Terminal - main entrance or/and reception
8. DOM Software and transponders at administration person who is in charge to create user transponders according to organisation scheme

Specijalni servisni cilindri za sisteme zaključavanja | Specijalni servisni cilindri za zaklepne sisteme | Partner Profile Cylinders

TL



- Personalizirani tekst na glavi ključa - npr. logo i kontakt
 - Visoka sigurnosna razina - mehanizam s 5 robustnih klinova u tijelu te 4-10 bočnih kontrolnih klinova protiv nasilnog otvaranja
 - Zaštita od kopiranja ključeva - profil ključa je zaštićen markom TITAN
 - Dugotrajna zaštita kroz patent - ključevi se ne mogu izrađivati kod neovlaštenih ključarskih radnji
 - Visoka razina komfora:
 - ključevi imaju žig sa podacima ovlaštenog partnera-servisa (izrada ključeva...)
 - oznaka ključa u drugoj boji
- Personalizirani tekst na glavi ključa - npr. logo in kontakt
 - Visok varnostni nivo - mehanizem s 5 robustnim klini ter 4-10 bočnimi klini proti nasilnemu odpiranju
 - Zaščita proti kopiranju ključev - profil ključa je zaščiten z znamko TITAN
 - Dolgotrajna zaščita s patentom - ključi se ne morejo izdelovati nepooblaščeno
 - Visok nivo udobja:
 - ključi imaju žig s podatki pooblaščenega partnerja-servisa (izdelava ključev ...)
 - oznaka ključa v drugi barvi
- Personalised text on key head, for example logo and contact
 - High security level - mechanism with 5 robust pin tumblers and 4-10 side control pins against breaking techniques
 - Key copy protection – key profile is protected with brand TITAN
 - Long term patent – keys cannot be made in unauthorised key cutting service
 - High level of comfort:
 - keys have coin with data of authorised partner service (for key cutting etc.)
 - key head mark in assorted colours

W



- Personalizirani tekst na glavi ključa - npr. logo i kontakt
 - Visoka sigurnosna razina - mehanizam s 5 robustnih klinova u tijelu te specijalni uski profil protiv nasilnog otvaranja
 - Visoka razina komfora - ključevi imaju žig sa podacima ovlaštenog partnera-servisa (izrada ključeva ...)
- Personalizirani tekst na glavi ključa - npr. logo in kontakt
 - Visok varnostni nivo - mehanizem s 5 robustnimi klini in specialnim ozkim profilom proti nasilnemu odpiranju
 - Visok nivo udobja - ključi imaju žig s podatki pooblaščenega partnerja-servisa (izdelava ključev ...)
- Personalised text on key head, for example logo and contact
 - High security level - mechanism with 5 robust pin tumblers and special narrow key channel against breaking techniques
 - High level of comfort - keys have coin with data of authorised partner service (for key cutting etc.)

HR

SLO

EN

ix 6 SR



- Personalizirani tekst na glavi ključa - npr. logo i kontakt
- Najviša razina tehničke zaštite od kopiranja ključeva - mobilni disk u ključu
- Visoka sigurnosna razina:
 - autorizacijska provjera ključa do 23 elementa
 - modularno tijelo: protulomnost i fleksibilnost dimenzija
- Dugotrajna zaštita kroz patent - ključevi se ne mogu izrađivati kod neovlaštenih ključarskih radnji
- Visoka razina komfora - ključevi imaju žig sa podacima ovlaštenog partnera-servisa (izrada ključeva...)

- Personalizirani tekst na glavi ključa - npr. logo in kontakt
- Najvišji nivo tehničke zaštite proti kopiranju - mobilni disk v ključu
- Visok varnostni nivo:
 - kontrola ključa z do 23 elementa
 - modularna izvedba: protulomnost in fleksibilnost dimenzij
- Dolgotrajna zaštita s patentom – ključci se ne morejo izdelovati nepooblaščno
- Visok nivo udobja - ključci imaju žig s podatki poo- blašćenega partnerja-servisa (izdelava ključev ...)

- Personalised text on key head, for example logo and contact
- The highest level of technical key copy protection - 45° floating bearing roller
- High security level
 - lock authorisation which occurs up to 23 times
 - modularity - against breaking, plug pulling and dimension flexibility
- Long term patent – keys cannot be made in unauthorised key cutting service
- High level of comfort - keys have coin with data of authorised partner service (for key cutting etc.)

ix Gamma



- Personalizirani tekst na glavi ključa - npr. logo i kontakt
- Najviša razina tehničke zaštite od kopiranja ključeva - pomična kuglica u ključu
- Visoka sigurnosna razina:
 - mnogostruka autorizacijska provjera ključa
 - modularno tijelo: protulomnost i fleksibilnost dimenzija
- Dugotrajna zaštita kroz patent (do 2025. god.) - ključevi se ne mogu izrađivati kod neovlaštenih ključarskih radnji
- Visoka razina komfora - ključevi imaju žig sa podacima ovlaštenog partnera-servisa (izrada ključeva...)

- Personalizirani tekst na glavi ključa - npr. logo in kontakt
- Najvišji nivo tehničke zaštite proti kopiranju - mobilna kroglica v ključu
- Visok varnostni nivo:
 - večkratna kontrola ključa
 - modularna izvedba: protulomnost in fleksibilnost dimenzij
- Dolgotrajna zaštita s patentom(do 2025) - ključci se ne morejo izdelovati nepooblaščno
- Visok nivo udobja - ključci imaju žig s podatki poo- blašćenega partnerja-servisa (izdelava ključev ...)

- Personalised text on key head, for example logo and contact
- The highest level of technical key copy protection - bearing ball
- High security level
 - multilevel lock authorisation
 - modularity - against breaking, plug pulling and dimension flexibility
- Long term patent (2025) – keys cannot be made in unauthorised key cutting service
- High level of comfort - keys have coin with data of authorised partner service (for key cutting etc.)

HR

SLO

EN

ix DAS



- Personalizirani tekst na glavi ključa - npr. logo i kontakt
- Visoka razina tehničke zaštite od kopiranja ključeva - specijalna izbočenja i udubljenja
- Visoka sigurnosna razina:
 - autorizacijska provjera ključa do 21 element
 - modularno tijelo: protulomnost i fleksibilnost dimenzija
- Dugotrajna zaštita kroz patent - ključevi se ne mogu izrađivati kod neovlaštenih ključarskih radnji
- Visoka razina komfora - ključevi imaju žig sa podacima ovlaštenog partnera - servisa (izrada ključeva...)

- Personalizirani tekst na glavi ključa - npr. logo in kontakt
- Visoki nivo tehničke zaštite pred kopiranjem ključev - posebna oblika profila
- Visok varnostni nivo:
 - autorizacijska kontrola ključa z do 21 elementi
 - modularen oklep: protivlomnost in fleksibilnost dimanzij
- Dolgotrajna zaščita na podlagi patenta - ključki se ne morejo izdelovati pri nepooblaščenih serviserjih
- Visok nivo udobja - ključki imaju žig s podatki pooblaščenega partnerja - servisa (izdelava ključev...)

- Personalised text on key head, for example logo and contact
- High level of technical key copy protection - the special high and deep milling in the key
- High security level
 - lock authorisation which occurs up to 21 times
 - modularity - against breaking, plug pulling and dimension flexibility
- Long term patent - keys cannot be made in unauthorised key cutting service
- High level of comfort - keys have coin with data of authorised partner service (for key cutting etc.)

Sigma Plus



- Personalizirani tekst na glavi ključa - npr. logo i kontakt
- Visoka sigurnosna razina:
 - autorizacijska provjera ključa do 19 elementa
 - modularno tijelo: protulomnost i fleksibilnost dimenzija
 - mehanizam s 6 robusnih klinova u tijelu te 4-12 bočnih kontrolnih klinova
- Zaštita od kopiranja ključeva - profil ključa je zaštićen markom DOM
- Dugotrajna zaštita kroz patent - ključevi se ne mogu izrađivati kod neovlaštenih ključarskih radnji
- Visoka razina komfora - ključevi imaju žig sa podacima ovlaštenog partnera - servisa (izrada ključeva...)

- Personalizirani tekst na glavi ključa - npr. logo in kontakt
- Visok varnostni nivo:
 - kontrola ključa z do 19 elementi
 - modularen oklep: protivlomnost in fleksibilnost dimanzij
 - mehanizem z 6 robusnimi klini ter 4-12 bočnimi klini
- Zaščita proti kopiranju ključev - profil ključa je zaščiten z znamko DOM
- Dolgotrajna zaščita na podlagi patenta - ključki se ne morejo izdelovati pri nepooblaščenih serviserjih
- Visok nivo udobja - ključki imaju žig s podatki pooblaščenega partnerja - servisa (izdelava ključev...)

- Personalised text on key head, for example logo and contact
- High security level
 - lock authorisation which occurs up to 19 times
 - modularity - against breaking, plug pulling and dimension flexibility
 - mechanism with 6 robust pin tumblers and 4-12 side control pins against breaking techniques
- Key copy protection – key profile is protected with brand DOM
- Long term patent - keys cannot be made in unauthorised key cutting service
- High level of comfort - keys have coin with data of authorised partner service (for key cutting etc.)

POSTANITE POSTANITE BECOME



TITAN copy center

Strojevi | Stroji | Machines

Ključevi | Ključī | Keys

Oprema | Oprema | Equipment

Edukacija | Šolanje | Education



Titan Easy

Mehanički stroj za izradu ključeva
Mehanski stroj za izdelavo ključev
Mechanical key cutting machine



Titan i DOM ključevi Titan i DOM ključići Titan and DOM keys

HR

- Poluautomatski stroj za rezanje cilindričnih, standardnih auto te križnih ključeva idealan za ulazak u svijet ključarskog posla.
- Zahvaljujući izbočenoj čeljusti, posebnoj sklopki za paljenje četke te kaljenoj vodilici s mogućnošću podešavanja dubine ovaj stroj jamči sigurnost kod rezanja ključeva.
- Za kompletiranje sigurnosnih značajki ovoga stroja ugrađen je prozirni plastični štít te zaštita električnih vodova i motora od preopterećenja preko strujnih osigurača.

! Razvojni tim iz TITANA je projektirao specijalnu 4-stranu čeljust koja odgovara za TITAN profile ključeva.

! Ključevi TL, T100RX, RS Sigma Plus se mogu izradivati samo uz specijalni ugovor s tvornicom TITAN.

SLO

- Polavtomatski stroj za izdelavo cilindričnih, standardnih avto ter křižnih ključev - idealen za začetek
- Zahvaljujoč izbočeni čeljusti, posebnemu stikalu za vključevanje krtače ter kaljenem vodilu z možnostjo regulacije globine rezkanja, ta stroj jamči za zanesljivost izdelave ključev.
- Glede varnosti delovanja je stroj opremljen z prozornim ščitom in zaščito proti preobremenitvi motorja.

! Razvojni tim iz TITANA je projektiral specijalno 4-strano čeljust, ki ustreza za TITANove profile ključev.

! Ključī TL, T100RX, RS Sigma Plus se lahko izdelujejo samo s specijalni dogovorom s tovarno TITAN.

EN

- Key cutting machine for cylinder, car and cruciform keys. Ideal model for starting locksmith business.
- This system guarantees a safe start of the machine, thanks to the forward movement of the carriage, and is equipped with an independent switch for the brush and with a tempered tracer with depth adjustment.
- The plastic protection screen and the cabling and engines protected from accidental overloads by a relay complete the safety equipment of this machine.

! TITAN R & D team developed special 4-sided jaw for TITAN keys.

! Keys TL, T100RX, Sigma Plus can be made only with special agreement with factory TITAN.



Ostali cilindrični ključevi Ostali cilindrični ključevi Other door keys



Auto ključevi Avto ključevi Car keys

HR

SLO

EN

• TEHNIČKE KARAKTERISTIKE:

- Napajanje: 230V 50Hz / 110V 60Hz
- Kretanje/osovine: 2 osovine
- Čeljusti: 4-strane
- Vodilica: kaljena
- Motor: asinkroni s 1 brzinom, 0,25 kW
- Nož: HSS 80x5x16 mm*
- Brzina okretaja noža: 700 o/min
- Četka: plastična (Tynex)
- Snaga motora: 200 W
- Dimenzije (ŠxDxV): 370x370x240 mm
- Težina: 19 kg

*HSS - nož od visokookretajućeg čelika je odgovarajući za sirove ključeve od čelika, a za ključeve od novog srebra preporučujemo Widia svrdla-glodala.

• TEHNIČNE KARAKTERISTIKE:

- Napajanje: 230V 50Hz / 110V 60Hz
- Pomik/osi: 2 osi
- Čeljusti: 4 strane
- Tipalo: kaljeno
- Motor: asinhronski z 1 hitrostjo moč 0,25 kW
- Režkar: HSS 80x5x16 mm*
- Vrtljaji rezkarja: 700 vrt/min
- Ščetke: plastična (Tynex)
- Moč motorja: 200 W
- Dimenzije (ŠxDxV): 370x370x240 mm
- Teža: 19 kg

*HSS - rezkar iz hitroreznega jekla je priporočljivo uporabljati za ključje iz jekla. Za ključje iz novega srebra se priporoča rezkar iz karbidne trdine oznake P25 (Widia).

• TECHNICAL FEATURES:

- Power Supply: 230V 50Hz / 110V 60Hz
- Movements/Axes: 2 axes
- Jaws: 4 faces
- Tracer: hardened
- Motor: asynchronous one speed, 0.25 Kw
- Cutter: HSS 80x5x16 mm*
- Cutter Speed: 700 rpm
- Brush: Tynex
- Absorption: 200 W
- Dimensions (WxDxH): 370x370x240 mm
- Weight: 19 kg

*HSS - high speed steel cutter is suitable for steel keys but for nickel silver keys we recommend carbide Widia cutter.

Titan Punto

Mehanički stroj za izradu ključeva
Mehanski stroj za izdelavo ključev
Mechanical key cutting machine



HR

SLO

EN

- jednostavan za uporabu, precizan i pouzdan
- za specijalne cilindrične ključeve horizontalnog profila (s rupicama) te laserske auto ključeve s valovitim užljebljenjem, tzv. zmijom.
- integrirano svjetlo
- vertikalno kretanje za izradu reverzibilnih ključeva (s rupicama)
- ručno fiksiranje svih mobilnih dijelova strojeva
- mogućnost korištenja dodatnih čeljusti za više vrsta ključeva
- klizni nosač čeljusti upravljan preko zgloba ručkice
- automatska provjera prilikom paljenja i gašenja svrdla-glodala
- prozirni plastični štit te zaštita električnih vodova i motora stroja od preopterećenja preko strujnih osigurača.
- svrdlo-glodalo za TITAN profile ključeva:
 - profili: K5plus, T200 i T250, šifra: TA53158000, Widia
 - profili: K5, K55, K56, K66, šifra: TA53158900, Widia (za iskusne korisnike je dovoljno svrdlo za K5plus, T200 i T250)
- vodilica za TITAN profile ključeva:
 - profili: K5plus, K5, K55, K56, K66, T200, T250, šifra: TA53157300
- svrdlo-glodalo za DOM profile ključeva:
 - profili: ix DAS, ix 6 SR, šifra: F66 - D729495ZB
 - profili: Sigma Plus, šifra: F15
- vodilica za DOM profile ključeva:
 - profili: ix DAS, ix 6 SR, šifra: T66 - D729496ZB
 - profili: Sigma Plus, šifra: T15

! Razvojni tim iz TITANA je projektirao specijalnu čeljust koja odgovara za TITAN profile ključeva.

! Ključevi T200, T250, ix DAS, ix Gamma, ix 6 SR se mogu izrađivati samo uz specijalni ugovor s tvornicom TITAN.

- enostaven za uporabo, precizen in zanesljiv
- za specijalne cilindrične ključve horizontalnega profila (s kalotami) ter laserske auto ključve z valovito krivuljo, tzv. kačo.
- integrirana osvetlitev
- vertikalno gibanje za izdelavo simetričnih ključev (s kalotami)
- ročno fiksiranje vseh gibljivih delov stroja
- možnost dodatnih čeljusti za več vrst ključev
- drsni nosilec čeljusti upravljan z zglobovno ročico
- avtomatska kontrola pri vključitvi in izkjučitvi rezkarja
- prozorna plastična zaščita, zaščita kablov in motorja proti preobremenitvi
- rezkar za TITAN profile ključeva:
 - profili: K5plus, T200 i T250, šifra: TA53158000, Widia
 - profili: K5, K55, K56, K66, šifra: TA53158900, Widia (za izkušene uporabnike je zadosti rezkar za K5plus, T200 i T250)
- vodilo za TITANove profile ključev:
 - profili: K5plus, K5, K55, K56, K66, T200, T250, šifra: TA53157300
- rezkar za DOM profile ključev:
 - profili: ix DAS, ix 6 SR, šifra: F66 - D729495ZB
 - profili: Sigma Plus, šifra: F15
- vodilo za DOM profile ključev:
 - profili: ix DAS, ix 6 SR, šifra: T66 - D729496ZB
 - profili: Sigma Plus, šifra: T15

! Razvojni tim iz TITANA je projektirao specijalnu čeljust ki ustreza za TITANove profile ključev.

! Ključvi T200, T250, ix DAS, ix Gamma, ix 6 SR se lahko izdelujejo samo s specijalnim dogovorom s tovarno TITAN.

- easy to use, precise and reliable
- to cut dimple and laser keys
- integrated light
- vertical suspensions for dimple keys
- manual locking of all mobile parts
- possibility of use with additional jaws
- carriages mounted on ball bearings
- automatic check of the start and stop of the cutter
- transparent shield for eye protection and engine and wiring are protected by a relay against accidental voltage overloads
- cutter for TITAN key profiles:
 - profiles K5plus, T200 and T250, code: TA53158000, Widia
 - profiles: K5, K55, K56, K66, code: TA53158900, Widia (for experienced user cutter for K5plus, T200 and T250 would be good enough)
- tracer for TITAN key profiles:
 - profiles: K5plus, K5, K55, K56, K66, T200, T250, code: TA53157300
- cutter for DOM key profiles:
 - profiles: ix DAS, ix 6 SR, code: F66 - D729495ZB
 - profiles: Sigma Plus, code: F15
- tracer for DOM key profiles:
 - profiles: ix DAS, ix 6 SR, code: T66 - D729496ZB
 - profiles: Sigma Plus, code: T15

! TITAN R & D team developed special jaw suitable for TITAN keys.

! Keys T200, T250, ix DAS, ix Gamma, ix 6 SR can be made only with special agreement with factory TITAN.



Titan i DOM ključevi Titan i DOM ključići Titan and DOM keys



Ostali cilindrični ključevi Ostali cilindrični ključići Other door keys



Auto ključevi Avto ključići Car keys

HR

SLO

EN

• TEHNIČKE KARAKTERISTIKE:

- Napajanje: 230V 50Hz / 110V 60Hz
- Osvjetljenje: žarulja 25 W
- Kretanje/osovine: 3 osovine
- Čeljusti: fiksne
- Vodilica: kaljena
- Motor: asinkroni s 1 brzinom
- Svrđlo-glodalo: HSS Ø6 mm*
- Brzina okretaja svrdla-glodala: 9000 o/min
- Snaga motora: 200W
- Dimenzije (ŠxDxV): 220x380x380 mm
- Težina: 21 kg

• DODATNA OPREMA:

- MK45 - Čeljusti za ključeve VAG
- MK5 - Čeljusti za 45° ključeve
- MA - Čeljusti za 5° ključeve
- MM - Čeljusti za ključeve Mercedes
- MTB - Adapter za varijante za ključeve Tibe (Ford)
- MOMAX - Čeljusti za ključeve Opel i Ford C-MAX

* HSS - svrdlo-glodalo od visokookretnog čelika je odgovarajući za sirove ključeve od čelika, a za ključeve od novog srebra preporučujemo Widia svrdla-glodala.

• TEHNIČKE KARAKTERISTIKE:

- Napajanje: 230V 50Hz / 110V 60Hz
- Osvjetljenje: žarnica 25 W
- Pomik/osi: 3 osi
- Čeljusti: fiksne
- Vodilo: kaljeno
- Motor: asinhronski 1 hitrost
- Režkar: HSS Ø6 mm*
- Hitrost obratov rezkarja: 9000 o/min
- Moč motorja: 200W
- Dimenzije (ŠxDxV): 220x380x380 mm
- Teža: 21 kg

• DODATNA OPREMA:

- MK45 - Čeljusti za ključve VAG
- MK5 - Čeljusti za 45° ključve
- MA - Čeljusti za 5° ključve
- MM - Čeljusti za ključve Mercedes
- MTB - Adapter za varijante za ključve Tibe (Ford)
- MOMAX - Čeljusti za ključve Opel i Ford C-MAX

* HSS - rezkar ustreza za rezkanje jeklenih ključev, za rezkanje novo srebrnih ključev priporočamo Widia rezkarje.

• TECHNICAL FEATURES

- Power Supply: 230V 50Hz / 110V 60Hz
- Lighting: Incandescent light bulb 25W
- Movements/Axes: 3 axes
- Jaws: Fixed
- Tracer: Hardened
- Motor: Asynchronous, single speed
- Cutter: HSS Ø 6 mm
- Cutter Speed: 9000 rpm
- Absorption: 200W
- Dimensions (WxDxH): 220x380x380 mm
- Weight: 21 kg

• ACCESSORIES:

- MK45: Jaws for VAG keys
- MK5: Jaws for 45° keys
- MA: Jaws for 5° key
- MM: Jaws for Mercedes car keys
- MTB: Code adaptor for Tibbe keys
- MOMAX: Jaws for Opel and Ford C-MAX keys

* HSS - high speed steel cutter is suitable for steel keys but for nickel silver keys we recommend carbide Widia cutter.

Ninja

Elektronski stroj za izradu ključeva
Elektronski stroj za izdelavo ključev
Electronic key cutting machine



Titan i DOM ključevi Titan i DOM ključči Titan and DOM keys

HR

- visokoprecizni stroj za izradu ključeva za jednostrane i dvostrane cilindrične ključeve s narezivanjem po varijanti, kopiranjem i dekodiranjem
- kopiranje ključeva moguće i bez upotrebe konzole ili povezanosti s računalom
- software omogućuje upravljanje s većim brojem korisnika, pohranjujući rezove, unos podataka, komuniciranje preko Instacode i Promaster, a u samom programu su već korisničke upute te mogućnost skidanja aktualnih dodataka s interneta
- velika baza profila ključeva

! uz svaki stroj Ninja potrebno je naručiti Instacode Instacode je br. 1 baza podataka u svijetu, snažan alat za ključarski posao, jednostavno se povezuje s Keyline strojevima.

Ostale mogućnosti: izrada kartice-profila ključeva, izračun varijanti za sisteme zaključavanja, baza podataka klijenta itd.

SLO

- visokoprecizni stroj za izdelavo ključev za enostranske in dvostranske cilindrične ključče, za kopiranje, za dekodiranje in rezkanje po varijanti.
- kopiranje ključev je možno brez povezave z računalnikom
- software omogoča upravljanje večih uporabnikov, shranjevanje podatkov rezkanja, vnos podatkov, komunikacijo preko Instacode in Promaster, v samem programu so navodila za kopiranje koristnih informacij iz interneta
- velika baza profilov ključev

! pri vsakem stroju Ninja je potrebno naročiti Instacode

Instacode je t. 1 baze podatkov na svetu, močno orodje za delo s ključi, enostavno se povezuje s Keyline stroji.

Ostale možnosti: izdelava kartice-profila ključa, izračun variant za zaklepne sisteme, baza podatkov stranke itd.

EN

- high precision key cutting machine for single-sided and double-sided flat keys, with code cutting, duplication and decoding functions
- in a stand-alone mode it can cut keys without need of a console or PC connection
- software includes the management of multiple users, the saving of the cut keys, the importing of customised data, communications via Instacode and Promaster, an on board user manual and the possibility of downloading the updates from the net
- equipped with the exhaustive key database

! for each Ninja bought, customers should buy an Instacode software

Instacode, the n.1 Key Data Software worldwide, a powerful tool to the Locksmith, easily connects with Keyline's key-cutting machines.

Several features like card Maker, Master Key Maker, customers database, etc.



Ostali cilindrični ključevi Ostali cilindrični ključevi Other door keys



Auto ključevi Auto ključevi Car keys

HR

SLO

EN

• TEHNIČKE KARAKTERISTIKE:

- Napajanje: 230 V 50 Hz / 110 V 60 Hz / 100 V 50-60 Hz
- Elektronska oprema: Matična ploča s ARM Cortex A8 CPU, 256 MB RAM, NAND 1 GB memorijom, visoka rezolucija kontrolnih osi
- Povezivanje: 2 USB 2.0 utičnice; 2 RS232 serial ports; 1 LAN utičnica
- Čitanje ključa / Sustav dekodiranja: Elektronski kontakt
- Osvjetljenje: LED - osvijetljena radna površina stroja
- Kretanje / Osi: 2 brzinski motor upravlja osima
- Čeljusti: 4 strane (više vrsta čeljusti dostupno prema potrebama tržišta)
- Stege: automatske stege se otključavaju pokretima osi
- Motor: asinkron, 0,18 Kw
- Nož: Widia Ø63 mm
- Brzina okretaja noža: 1500-3000 o/min (prilagodljiva brzina prema odabiru programa)
- Snaga motora: 250W (35W u stanju mirovanja)
- Dimenzije (ŠxDxV): 340x415x300 mm
- Težina: 20 kg

• TEHNIČKE KARAKTERISTIKE KONZOLE:

- Napajanje: DC 24 V (napajanje iz stroja za izradu ključeva)
- Korisničko sučelje: 7" zaslon osjetljiv na dodir, 16:10, rezolucije 800x480 px, VGA, gumb za brzo kopiranje

• TEHNIČKE KARAKTERISTIKE:

- Napajanje: 230 V 50 Hz / 110 V 60 Hz / 100 V 50-60 Hz
- Elektronska oprema: Matična ploča s ARM Cortex A8 CPU, 256 MB RAM, NAND 1 GB spominom, visoka rezolucija kontrolnih osi
- Povezovanje: 2 USB 2.0 utičnice; 2 RS232 serial ports; 1 LAN vtičnica
- Čitanje ključev / sestav dekodiranja: Elektronski kontakt
- Osvjetlitev: LED - osvijetljena delovna površina stroja
- Pomik/osi: 2 hitrostni motor upravlja z osmi
- Čeljusti: 4 strane (več vrst čeljusti glede na potrebe tržišča)
- Zavore: avtomatske zavore se izklopijo ob pomiku osi
- Motor: asinhronski 0,18 Kw
- Režkar: Widia Ø63 mm
- Hitrost obratov rezkarja: 1500-3000 o/min (prilagodljiva hitrost glede na program)
- Moč motorja: 250W (35W v stanju mirovanja)
- Dimenzije (ŠxDxV): 340x415x300 mm
- Teža: 20 kg

• TEHNIČKE KARAKTERISTIKE KONZOLE:

- Napajanje: DC 24 V (napajanje iz stroja za izdelavo ključev)
- Uporabniški zaslon: 7" zaslon občutljiv na dotik, 16:10, rezolucije 800x480 px, VGA, gumb za hitro kopiranje

• TECHNICAL FEATURES:

- Power Supply: 230V 50 Hz / 110V 60 Hz / 100V 50-60Hz
- Electronic Equipment: Mainboard with ARM Cortex A8 CPU, 256 MB RAM, NAND 1 GB memory, high resolution axes control
- External Connections: 2 USB 2.0 ports; 2 RS232 serial ports; 1 LAN port
- Key Reading / Decoding: System Electric contact
- Lighting: LED - lighted cutting bay
- Movements / Axes: 2 stepper motor-operated axes
- Jaws: 4 faces (more jaws are available for specific markets)
- Gauge: automatic gauge unlock through the movement of the axes
- Motor: asynchronous, 0.18 KW
- Cutter: in Widia Ø63 mm
- Cutter Speed: 1500-3000 rpm (variable speed according to the programmes)
- Absorption: 250W (35W in stand-by)
- Dimensions (WxDxH): 340x415x300 mm
- Weight: 20 kg

• CONSOLE TECHNICAL FEATURES:

- Power Supply: DC 24V (fed by the key cutting machine)
- User Interface: 7" resistive colour touch screen, 16:10, resolution 800x480 px, VGA, quick duplication button

Ninja Vortex

Elektronski stroj za izradu ključeva i graviranje
Elektronski stroj za izdelavo ključev in graviranje
Electronic key cutting and engraving machine



HR

SLO

EN

- očitavanje u sekvencama-dekodiranje, izrađuje po varijantama specijalne cilindrične ključeve horizontalnog profila (s rupicama) te laserske auto ključeve s valovitim užljebljenjem (tzv. zmijom) s funkcijom graviranja na vrat ili glavu ključa
- za izradu ključeva koristi tehnologiju 3 osi te veliku bazu podataka profila
- funkcija graviranja omogućuje presonaliziranje glave ključa primjenom grafičkih rješenja na metalnu glavu bez zamjene čeljusti za ključeve
- osigurana kompletna oprema za izradu većinu poznatih specijalnih ključeva horizontalnog profila (s rupicama) koja omogućuje sigurnu upotrebu te automatsku kalibraciju i prepoznavanje. Na upit moguće izraditi prilagođene čeljusti i svrdla-glodala projektirano za specifičan profil
- software Liger razvijen za obradu svih sistema zaključavanja s bazom podataka koja se redovito osvježava
- složene operacije se provode jednostavno preko dodirnog zaslona u boji

! Uz svaki stroj Ninja Vortex potrebno je naručiti Instacode.

Instacode je br. 1 baza podataka u svijetu, snažan alat za ključarski posao, jednostavno se povezuje s Keyline strojevima.

Ostale mogućnosti: izrada kartice-profila ključeva, izračun varijanti za sisteme zaključavanja, baza podataka klijenta itd.

! Za TITAN i za DOM ključeve se naručuje posebno svrdlo-glodalo i vodilica te posebna čeljust. Više detalja saznajte kod Vašeg prodajnog predstavnika.

- odčitavanje v sekvencah - dekodiranje, izdeluje po varijantah specialne cilindrične ključve horizontalnega profila (s kalotami) ter laserske avto ključve z krivuljnim utorom (s kačo), možnost graviranja na vrat ali glavo ključva.
- za izdelavo ključev koristi tehnologijo 3 osi ter veliko bazo podatkov profilov.
- funkcija graviranja omogoča presonalizacijo glave ključva z uporabo grafičnih rešitev na glavi, bez zamenjave čeljusti za ključve
- zagotovljena kompletna oprema za izdelavo većinu poznatih specijalnih ključev horizontalnega profila (s kalotami), ki automatsko kalibraciju in prepoznavanje. Na zahtevo je mogoće izdelati prilagojene čeljusti in rezkarje za specifičen profil
- software Liger je raazvit za obdelavo zaklepnih sistemov z bazo podatkov, ki se redno osvježuje
- zahtevne operacije se rešuje s pomoćjo zaslona v barvah na dotik

! pri vsakem stroju Ninja je potrebno naročiti Instacode

Instacode je t. 1 baze podatkov na svetu, Moćno orodje za delo s ključvi, enostavno se povezuje s Keyline stroji.

Ostale mogućnosti: izdelava kartice-profila ključva, izračun varijant za zaklepane sisteme, baza podatkov stranke itd.

! Za TITAN in za DOM ključve se naroća posebni rezkar in vodilo ter posebna čeljust. Već informacij dobite pri vašem prodajnem predstavniku.

- works in sequential decoding, coding and in the engraving of the neck or heads of the high security, laserand dimple keys
- key cutting technology based on the combination of three axes united with the exhaustive key database
- the engraving system allows the personalization of metal head keys through graphic etching without the need to remove the key from the jaw
- ninja Vortex includes complete equipment to cut the most widespread dimple keys that allows a secure installation, with automatic calibration and identification. Furthermore, jaws and cutters designed for special uses are available upon request
- the Liger software developed by Keyline stands out for its ability to process every cutting system and receive the updates
- complex operations, thanks to the color interface, are simple and easy to learn

! For each Ninja bought, customers should buy an Instacode software.

Instacode, the n.1 Key Data Software worldwide, a powerful tool to the Locksmith, easily connects with Keyline's key-cutting machines.

Several features like card Maker, Master Key Maker, customers database, etc.

! Order separately jaws and cutters designed for TITAN and DOM keys. For more details ask you sales rep.



Titan i DOM ključevi Titan i DOM ključići Titan and DOM keys



Ostali cilindrični ključevi Ostali cilindrični ključići Other door keys



Auto ključevi Auto ključići Car keys

HR

SLO

EN

• TEHNIČKE KARAKTERISTIKE:

- Napajanje: 230 V 50 Hz / 110 V 60 Hz / 100 V 50-60 Hz
- Elektronska oprema: Matična ploča s ARM Cortex A8 CPU, 256 MB RAM, NAND 1 GB memorijom, visoka rezolucija kontrolnih osi
- Povezivanje: 2 USB 2.0 utičnice; 2 RS232 serial ports; 1 LAN utičnica
- Čitanje ključa / Sustav dekodiranja: Elektronski kontakt
- Osvjetljenje: LED
- Kretanje / Osi: 3 osi, koračni motor preko lineranih pokreta, interpolacija preko visoko preciznih ležajeva
- Čeljusti: C01 osnovna čeljust za specijalne cilindrične ključeve s rupicama te graviranje (druge čeljusti su dostupne po narudžbi)
- Motor: elektromotor izmjenične struje
- Svrdlo-glodalo: 90° kut rezanja 4 mm (za cilindrične ključeve); Ostali modeli dostupni po narudžbi
- Brzina okretaja svrdla-glodala: 10.000 o/m
- Snaga motora: 250W (35W u stanju mirovanja)
- Dimenzije (ŠxDxV): 340x415x300 mm
- Težina: 19 kg

• TEHNIČKE KARAKTERISTIKE KONZOLE:

- Napajanje: DC 24 V (napajanje iz stroja za izradu ključeva)
- Korisničko sučelje: 7" zaslon osjetljiv na dodir, 16:10, rezolucije 800x480 px, VGA, gumb za brzo kopiranje

• TEHNIČKE KARAKTERISTIKE:

- Napajanje: 230 V 50 Hz / 110 V 60 Hz / 100 V 50-60 Hz
- Elektronska oprema: Matična ploča s ARM Cortex A8 CPU, 256 MB RAM, NAND 1 GB spominom, visoka rezolucija kontrolnih osi
- Povezivanje: 2 USB 2.0 utičnice; 2 RS232 serial ports; 1 LAN utičnica
- Čitanje ključev / sestav dekodiranja: Elektronski kontakt
- Osvjetlitev: LED - osvijetljena delovna površina stroja
- Pomik/osi: 3 osi, koračni motor preko linearnih pogonov z preciznimi ležaji
- Čeljusti: C01 osnovna čeljust za cilindrične ključeve s kalotami in za graviranje (več vrst čeljusti glede na potrebe tržišča)
- Motor: elektromotor izmeničnega toka
- Režkar: 90° kot rezanja (za cilindrične ključeve); Ostali modeli po naročilu.
- Hitrost obratov noža: 10.000 o/min
- Moč motorja: 250W (35W v stanju mirovanja)
- Dimenzije (ŠxDxV): 340x415x300 mm
- Teža: 19 kg

• TEHNIČKE KARAKTERISTIKE KONZOLE:

- Napajanje: DC 24 V (napajanje iz stroja za izdelavo ključev)
- Uporabniški zaslon: 7" zaslon občutljiv na dotik, 16:10, rezolucije 800x480 px, VGA, gumb za hitro kopiranje


• TECHNICAL FEATURES:

- Power Supply: 230V 50 Hz / 110V 60 Hz / 100V 50-60Hz
- Electronic Equipment: Mainboard with ARM Cortex A8 CPU, 256 MB RAM, NAND 1 GB memory, high resolution axes control
- External Connections: 2 USB 2.0 ports; 2 RS232 serial ports; 1 LAN port
- Key Reading / Decoding: System Electric contact
- Lighting: LED - lighted cutting bay
- Movements / Axes: 3 stepper motor-operated axes
- Jaws: C01 master for dimple keys and bow etching (supplementary models available upon request).
- Motor: DC electronic motor
- Cutter: End milling cutter
- Cutter Speed: 10.000 rpm
- Absorption: 250W (35W in stand-by)
- Dimensions (WxDxH): 340x415x300 mm
- Weight: 19 kg

• CONSOLE TECHNICAL FEATURES:

- Power Supply: DC 24V (fed by the key cutting machine)
- User Interface: 7" resistive colour touch screen, 16:10, resolution 800x480 px, VGA, quick duplication button

Ključarski radni stol | Delovna miza | Locksmith Display for Key Cutting Machine

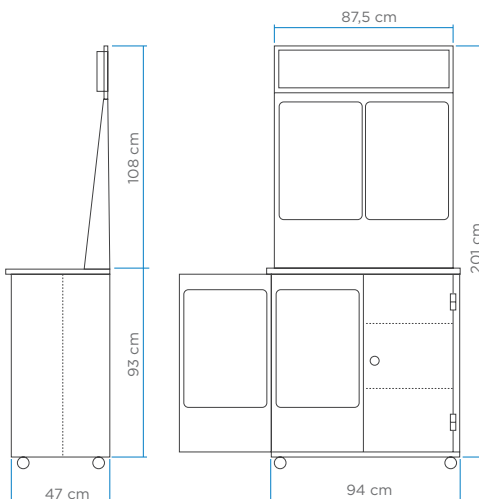

HR

- dimenzije (ŠxDxV): 100x53x205 cm
- težina: 55 kg
- ugrađena svjetleća reklama


SLO

- dimenzije (ŠxDxV): 100x53x205 cm
- teža: 55 kg
- ugrajena svetleča reklama

EN

- dimension (WxDxH): 100x53x205 cm
- weight: 55 kg
- illuminated display

Stalak za ključeve | Stojalo za ključe | Keys Display

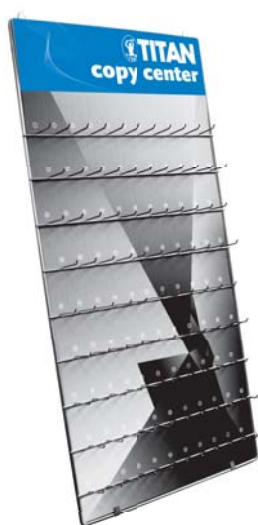

HR

- dimenzije (ŠxV): 51x100 cm
- broj kukica: 99




SLO

- dimenzije (ŠxV): 51x100 cm
- število kljukic: 99

EN

- dimension (WxH): 51x100 cm
- number of hooks: 99

Titan akademija | Titan akademija | Titan Academy

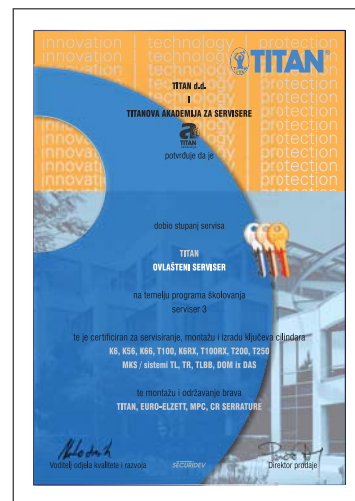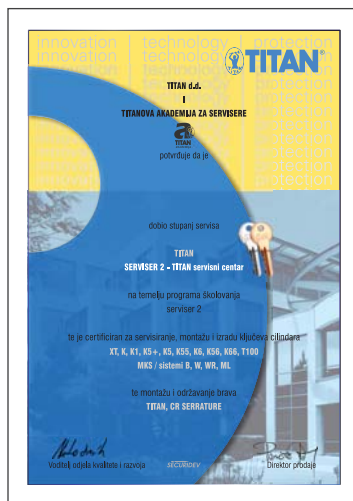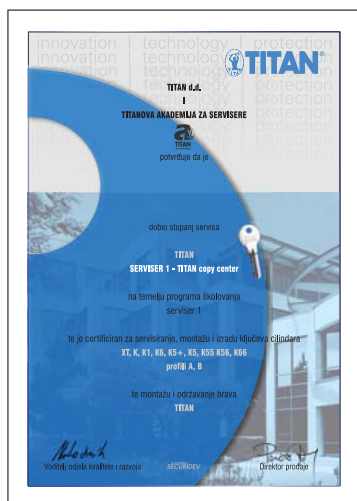

HR

Titan akademija svojim partnerima osigurava edukaciju za profesionalan ulazak u posao.

MODULI EDUKACIJE:

- **Ovlašteni servisni centar** - izrada i servis kompleksnih sistema zaključavanja
- **Servisni centar** - izrada i servis jednostavnih sistema zaključavanja
- **Titan copy centar** - izrada ključeva

Po završetku edukacije polaznici će dobiti certifikat i ovlaštenje TITAN-a za izradu TITAN i DOM ključeva i sistema zaključavanja ovisno o dobivenom stupnju edukacije.

OVLAŠTENI SERVISNI CENTAR

- profesionalna razina izrade sistema zaključavanja u patentiranim profilima TITAN i DOM: TL, ix 6 SR, ix Gamma, ix DAS, Sigma Plus
- preduvjet: servis mora imati minimalno jedan patentirani profil te odgovarajuću opremu

SERVISNI CENTAR

- jednostavni sistemi zaključavanja: B profil, W profil, K66 ...
- preduvjet: servis mora imati odgovarajuću opremu

TITAN COPY CENTAR

- izrada svih vrsta nepatentiranih ključeva
- preduvjet: servis mora imati odgovarajuću opremu

Servisi nižeg stupnja mogu se unaprijediti ulaganjem u profile i opremu.

Za dodatne informacije obratite se Odjelu sistema zaključavanja (sistemi@titan-hrvatska.hr).

SLO

Titan akademija svojim partnerem zagotavlja izobraževanje za profesionalni začetek posla.

MODULI IZOBRAŽEVANJA:

- **Pooblaščen servisni centar** - izdelava in servisiranje kompleksnih zaklepnih sistemov
- **Servisni centar** - izdelava in servisiranje enostavnih zaklepnih sistemov
- **Titan copy center** - izdelava ključev

Po končanem izobraževanju udeleženci dobijo certifikat in pooblastilo TITAN-a za izdelavo TITAN in DOM ključev in zaklepnih sistemov glede na pridobljen modul izobraževanja.

POOBLAŠČENI SERVISNI CENTAR

- profesionalni nivo izdelave zaklepnih sistemov s patentiranimi profili TITAN in DOM: TL, ix 6 SR, ix Gamma, ix DAS, Sigma Plus
- predpogoji: servis mora imeti minimalno en patentirani profil ter potrebno opremo

SERVISNI CENTAR

- enostavni zaklepn sistemi: B profil, W profil, K66 ...
- predpogoji: servis mora imeti potrebno opremo

TITAN COPY CENTER

- izdelava vseh vrst nepatentiranih ključev
- predpogoji: servis mora imeti potrebno opremo

Servisi nižje stopnje morajo doseči višji nivo z vlaganjem v profile in opremo.

Za dodatne informacije se obrnite na servisno službo v Titanu (info.@titan.si).

EN

The titan academy offers its partners the education to make them professionals in their work.

EDUCATION MODULES:

- **Authorised service centre** - manufacture and maintenance of complex master locking systems
- **Service centre** - manufacture and maintenance of simple master locking systems
- **Titan copy centre** - key cutting

After completing the education, the learners will receive a certificate and authorisation from TITAN to manufacture TITAN and DOM keys and locking systems, depending on the level of education obtained.

AUTHORISED SERVICE CENTRE

- professional level of manufacturing the master locking systems in patented profiles TITAN and DOM: TL, ix 6 SR, ix Gamma, ix DAS, Sigma Plus
- precondition: the service must have at least one patented profile and the appropriate equipment

SERVICE CENTRE

- simple locking systems: B profile, W profile, K66...
- precondition: the service must have the appropriate equipment

TITAN COPY CENTRE

- manufacture of all types of non-patented keys
- precondition: the service must have the appropriate equipment

Low-ranked service centres can be improved by investing in profiles and equipment.

For further information, please contact the Department for Master Locking Systems (info@titan.si).

TITAN-Zagreb d.o.o.

Kovinska 27, 10090 Zagreb, Hrvatska

tel.: +385 1 34 98 300

fax.: +385 1 34 98 312

prodaja@titan-hrvatska.hr

www.titan-hrvatska.hr

www.titandom.hr

TITAN d.d.

Kovinarska cesta 28, 1241 Kamnik, Slovenija

tel.: +386 1 83 09 100

fax.: +386 1 83 09 200

titan@titan.si

www.titan.si

TITAN-okovi d.o.o.

Janka Čmelika 2, 11272 Beograd - Dobanovci, Srbija

tel.: +381 11 84 67 264

+381 11 63 01 203

fax.: +381 11 84 67 264

titan@titan-okovi.rs

www.titan-okovi.rs





INNOVATION | TECHNOLOGY | PROTECTION